

Commercial Grade Light String Kits

Installation instructions for LS-M-24-48 and LS-MS-24-48 light string kits

WARNING: These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed in accordance with the owners manual, current electrical codes and/or the current National Electric Code (NEC).

CAUTION – To reduce the risk of fire, electric shock or injury to persons:

1. Commercial Grade Light String is intended for installation by trained, qualified electrical contractors.
2. Light string must be supported by steel guide cables, with zip ties and eyebolts, or other suitable supporting hardware whenever span distances exceed twenty feet. See Figure 1 on reverse.
3. Proper diameter cabling must be used for instances requiring guide wire between supports according to local building codes.
4. Suspend strings properly by attaching suspension cable (not provided) to solid support structures, such as joists, beams or wall studs.
5. Light sockets must be installed so that bulbs are facing down **ONLY**.
6. Keep combustible material clear of bulbs. Do **NOT** allow lamps or sockets to come into contact with walls, ceilings, fabrics associated with shades, blinds or other materials. Lamps should hang freely in a downward direction with a minimum of 3" space from the nearest object.
7. Do not cluster the bulbs.
8. Not intended for installation in ceilings, soffits, cabinets or other enclosed spaces.
9. Not intended for lighting aquariums.
10. Do **NOT** secure light string to buildings or other structural supports using nails, staples or other sharp, conducting materials.
11. Avoid damage to the insulation during installation. Do **NOT** pierce or otherwise compromise wire's or socket's outer covering, jacket or sheathing.
12. Periodically inspect wire and sockets for degradation due to weather, UV light or other damage. Promptly replace worn out light string.
13. **DO NOT MOUNT THE LIGHT STRINGS WITH SOCKETS FACING UPWARD!**
14. **USE WITH 25-WATT (MAXIMUM) BULBS ONLY!**
15. **DO NOT EXCEED 18 AMPS IN ANY RUN!**

WARNING – RISK OF ELECTRIC SHOCK!!

Disconnect power at source prior to wiring, re-lamping or servicing in any way.

1. The light string kits are supplied with an attached polarized plug that will only fit into a polarized outlet. If it does not fit, reverse the plug. If it still does not fit, contact a qualified electrician. **Do not alter the plug.**


RESTORATION HARDWARE

Commercial Grade Light String Kits

Installation instructions for LS-M-24-48 and LS-MS-24-48 light string kits

SECURING LIGHT STRINGS TO A MOUNTING SURFACE

1. Each socket of the light string must be securely attached to a support structure. Do NOT secure light string or its sockets to buildings or other structural supports using nails, staples or other sharp, fasteners that can pierce the wire jacket; or with conducting materials.
2. At each end of a span (two unsupported sockets or more), eyebolts or other supporting hardware must be used. The maximum span distance for LS-MS-24-48 and/or LS-M-24-48 between supports is twenty feet (ten sockets). A guide wire is required for any span that exceeds twenty feet. See Figure 1.

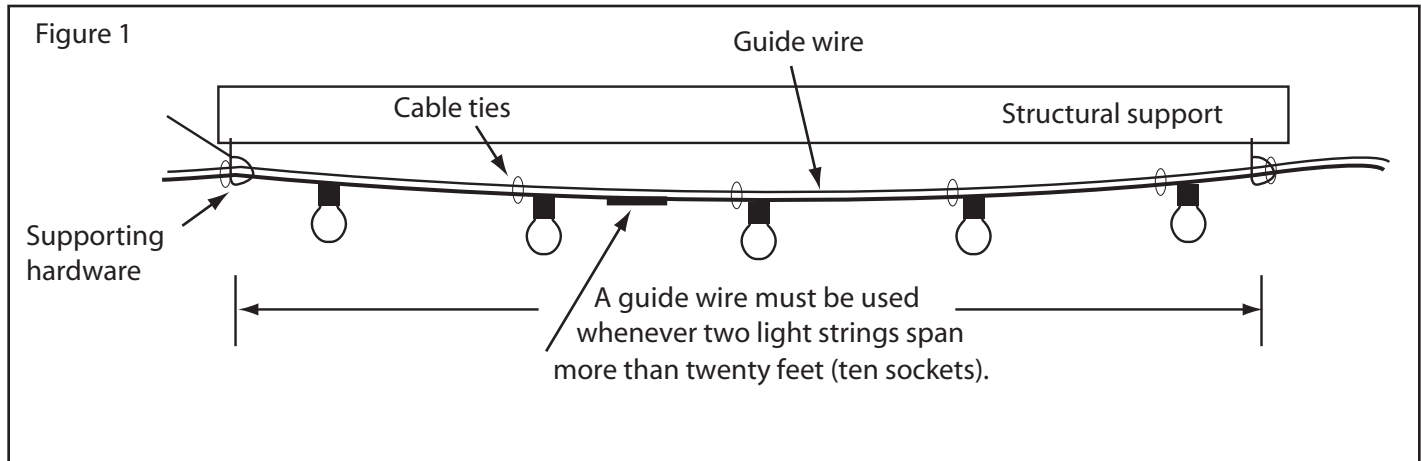

RE-LAMPING LIGHT STRINGS

WARNING – RISK OF ELECTRIC SHOCK!! Disconnect power at source prior to re-lamping light strings. For outdoor light strings, do NOT re-lamp light strings during rain or other inclement weather conditions.

1. Re-lamp light strings only during dry and calm weather conditions.
2. Unscrew existing lamps by lightly holding the socket in one hand and twisting the lamp counter-clockwise. Lamps may be tight in the sockets. This is normal to prevent moisture from getting into socket.
3. Replace with medium base lamp of same wattage. **Do not exceed 25 watts per bulb.** Screw bulb into socket clockwise until top of socket forms a tight seal around bulb and bulb makes solid contact with socket.

RESTORATION HARDWARE