
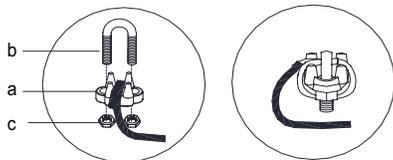


# RH

## BOULE DE CRISTAL ROUND CLUSTER CHANDELIER 40"

### PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Connection Rods (4)
- (C) Mounting Screws (2)
- (D) Canopy (1)
- (E) Nuts (4)
- (F) Caps (4)
- (G) T-Wrench (1)
- (H) Bulbs (30)

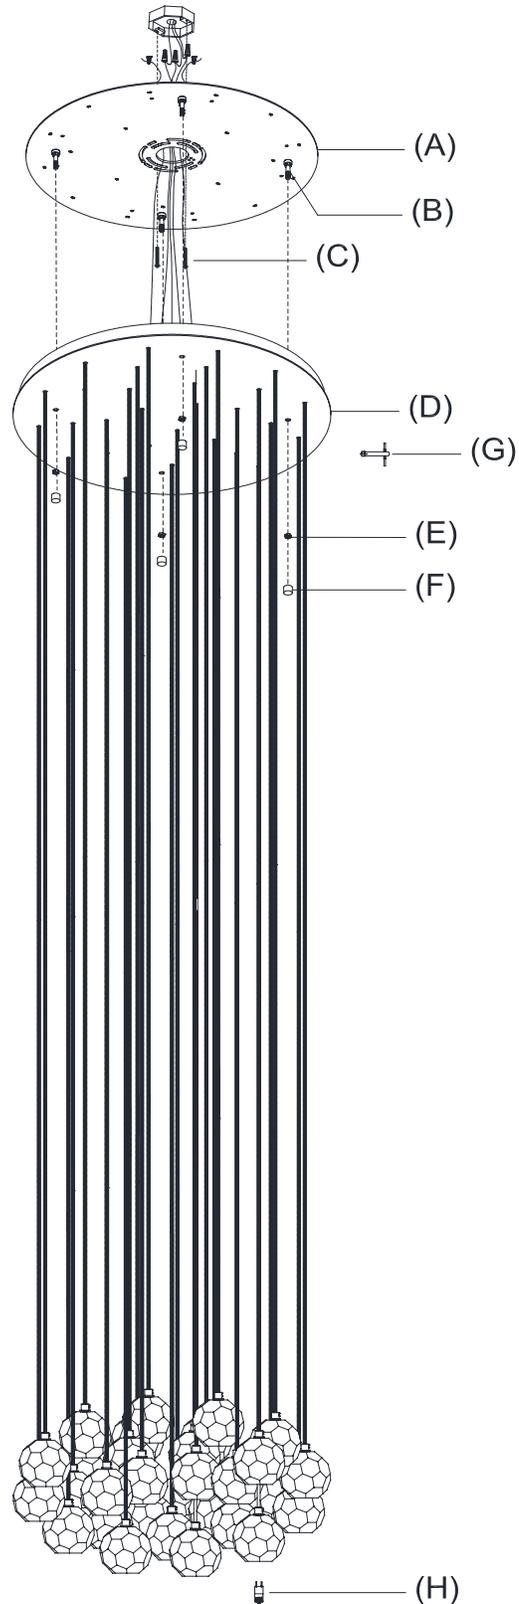

#### Install safety cable:

1. Wrap the safety cable into the slot hole on the mounting plate.
2. Wrap the safety cable around the saddle (a).
3. Insert U-bolt clip (b) into the saddle (a) and secure with the nuts (c).

## BOULE DE CRISTAL ROUND CLUSTER CHANDELIER 40"

**IMPORTANT SAFETY INSTRUCTIONS**

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for thirty (30) 20-watt maximum Type T4 lightbulbs (included). To avoid the risk of fire, do not exceed the recommended wattage.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch or look directly at the bulbs when fixture is illuminated. Keep flammable materials away from lit bulbs.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.**



**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

**ASSEMBLY & INSTALLATION**

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Remove Mounting Plate (A) from Canopy (D) by removing Caps (F) and Nuts (E).
3. Attach Mounting Plate (A) to the ceiling and secure with Mounting Screws (C) and other proper fasteners from your local hardware store.

**ASSEMBLY & INSTALLATION CONT.**


4. Connect the safety steel wire from the fixture and the safety cable from the ceiling. Refer to the illustration on previous page.
5. Attach the fixture ground wire (green or green/yellow) to the ground wire from the outlet box (usually green insulation or bare wire) with a plastic wire connector and wrap the connection with electrical tape. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
6. Connect the neutral wires from the ballast (white) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
7. Connect the hot wires (black) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
8. Attach Canopy (D) with the fixture to the affixed Mounting Plate (A). Let Connection Rods (B) pass through the holes on Canopy (D) and secure with Nuts (E) and Caps (F).
9. Insert Bulbs (H) into each of the sockets.
10. Restore power to outlet box and check operation of fixture.
11. Assembly is complete.

**CARE INSTRUCTIONS**


Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

## BOULE DE CRISTAL ROUND CLUSTER CHANDELIER 40"


### HEIGHT ADJUSTMENT INSTRUCTIONS

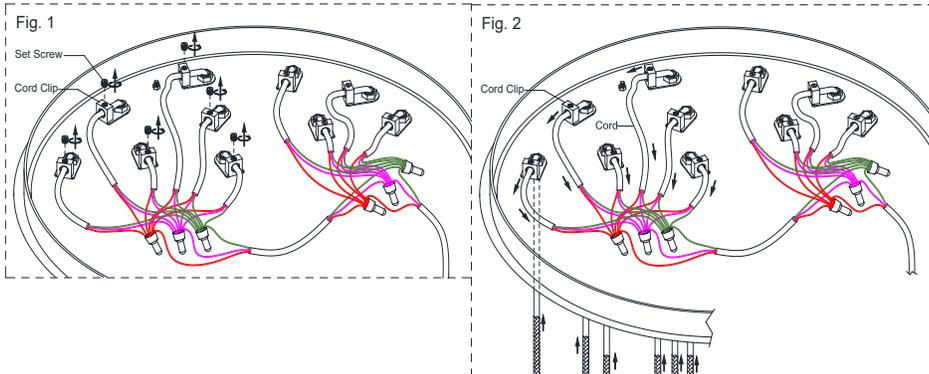


1. Loosen set screws on the top of the cord clips.
2. Determine the hanging length for each crystal light. Pull the hanging cords out through the cord clips to desired length.

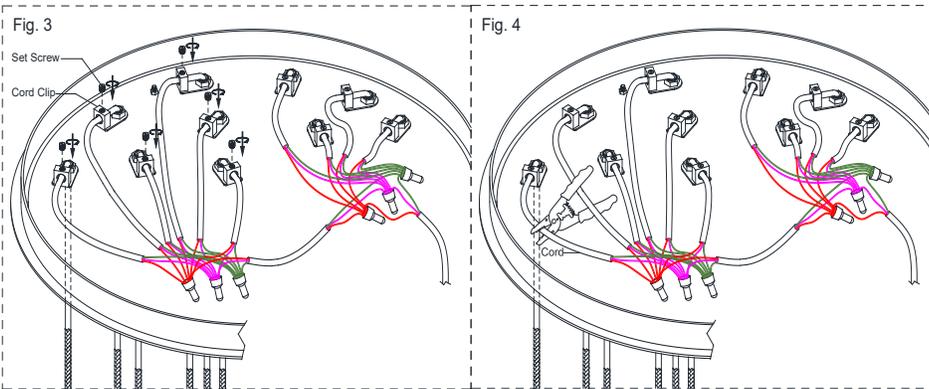

3. Replace set screws and tighten to lock hanging cord in place.
4. Cut off the pulled out cords with the wire cutter provided.

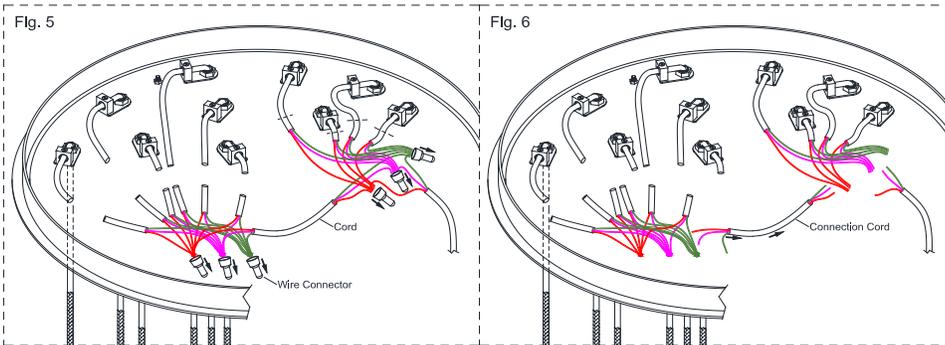

5. Remove the wire connectors using the pliers.
6. Take apart the connection cord and set aside.

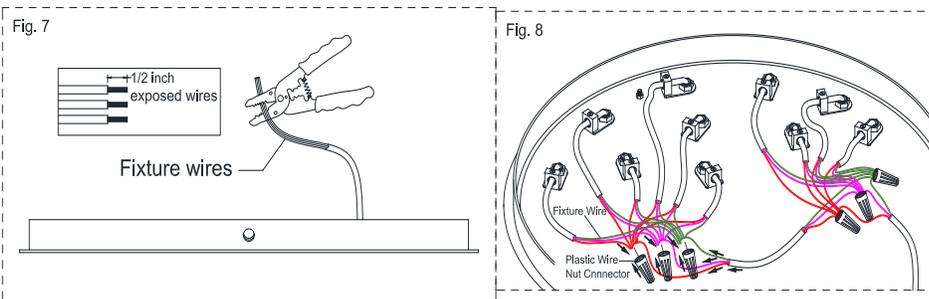

7. Use a pair of wire strippers to remove about 1/2" of the insulation from each wire.
8. Reconnect the wire ends and secure with the plastic nut connectors.