




RIVAGE ROUND FLUSHMOUNT 6"

ASSEMBLY & INSTALLATION INSTRUCTIONS

UNITED STATES ENGLISH

RIVAGE ROUND FLUSHMOUNT 6"**PARTS INCLUDED:**

- (A) Junction Box, 50lbs/22.7kg MIN. FIXTURE RATED (not included)
- (B) Mounting Bolts (2 pcs; for junction box only)
- (C) Wire Nuts (3)
- (D1) Ceiling Plate (1)
- (D2) Ceiling Box (1)
- (D3) Bolts (2)
- (E) Metal Ring (1)
- (F) Calcite Shade (1)
- (G) Set Bolts (2)
- (H) Allen Key (1)
- (I) Safety Cable (1)

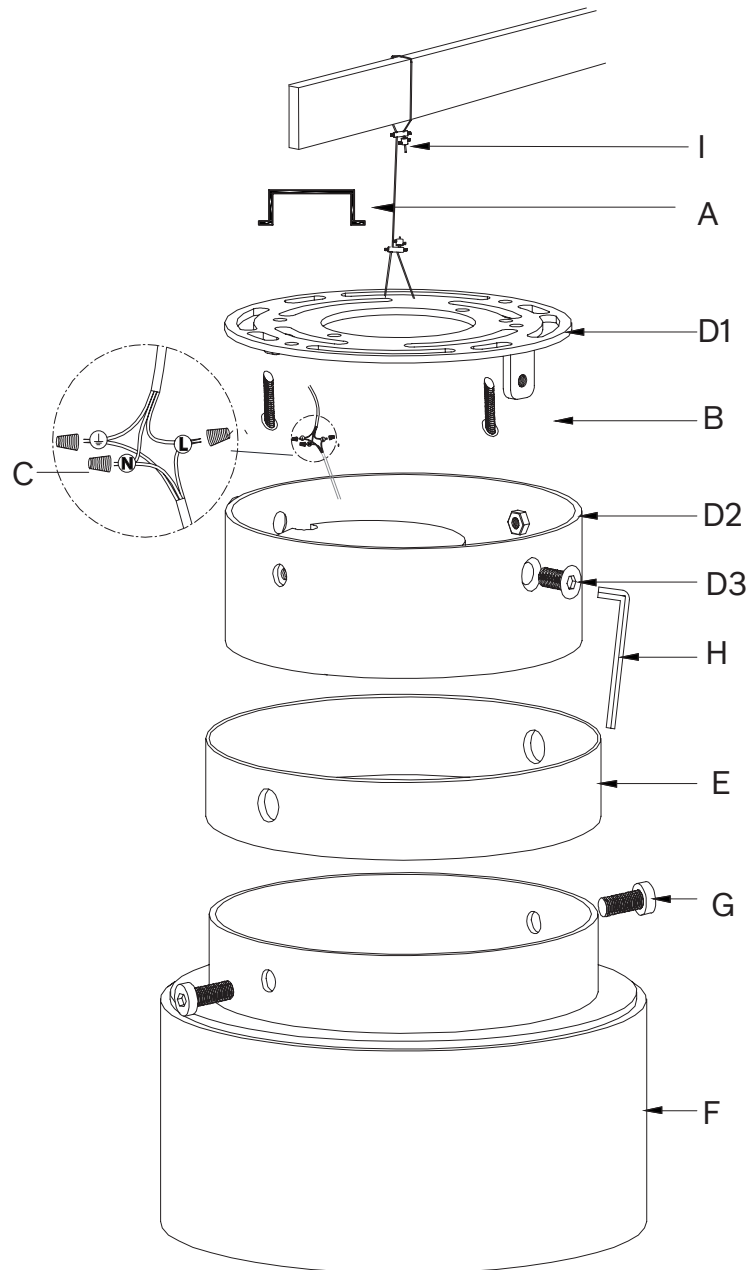

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING TO JUNCTION BOX. UNIQUE OR ALTERNATIVE INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES**BULBS**

This fixture has been rated for one (1) 8-watt LED module. To avoid the risk of fire, do not exceed the recommended wattage.

VAULTED CEILING COMPATIBILITY

This fixture is vaulted-ceiling compatible.

DIMMER SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible and may be used with a forward-phase dimmer switch.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.

WARNING: STRANGULATION HAZARD


Keep cord at least 3 feet (91cm) away from cribs, bassinets, and toddler beds.

Keep out of reach of children under 3 years of age.


THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

INSTALL SAFETY CABLE:

1. Remove the nut locker A & B by loosening the set screw from the ceiling safety cable before installation.
2. Insert the ceiling safety cable through the nut lockers as the drawing shows.
3. Fasten the nut locker A with set screw/bolt.
4. Fasten the nut locker B with set screw/bolt.

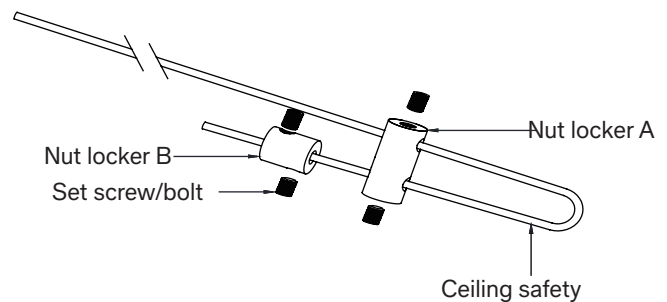

ASSEMBLY AND INSTALLATION**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn OFF power to junction box (A) where the fixture will be installed.
3. Loosen the bolts (G) and remove the metal ring (E) and calcite shade (F), then loosen the bolts (D3) and remove the ceiling plate (D1) from ceiling box (D2).
4. Have a professional contractor reinforce ceiling. Attach the safety cable (I) to the ceiling beam through the junction box (A), then attach the safety cable to the fixed fixture on the ceiling with the nut locker.
5. Attach the ceiling plate (D1) to the junction box (A) and secure with mounting bolts (B).
6. Carefully inspect the fixture wires. One is the ground wire (marked with ). The second is the neutral wire (marked with N). The third wire is the live/hot wire (marked with L).
7. Connect the fixture ground wire to the power supply ground wire with wire nut (C).

NOTE: IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.

8. Connect the fixture neutral wire to the power supply neutral wire with wire nut (C).
9. Connect the fixture live/hot wire to the power supply live/hot wire with wire nut (C).

CAUTION: DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, AS SAFETY WILL BE COMPROMISED.

10. Move the ceiling box (D2) up to the ceiling, then fasten the bolts (D3).
11. Locate the metal ring (E) onto the calcite shade (F), then attach the calcite shade (F) to the ceiling box (D2) with set bolts (G).
12. Restore power to the junction box and test fixture.
13. Assembly is complete.

CARE INSTRUCTIONS


Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

LIGHT SOURCE AND LED DRIVER REPLACEMENT INSTRUCTIONS

1. Turn OFF power to junction box.
2. Uninstall the lighting fixture from the ceiling.
3. Loosen the set bolts (G) from calcite shade (F), then remove the the metal ring (E) and calcite shade (F) from the ceiling box (D2).
4. Replace the new ceiling box (D2) which fixed with light source and LED driver, then connect power supply wires to input wires from the LED driver with wire nut.

Note: Connect the fixture ground wire to the power supply ground wire with wire nut (C). Connect the fixture neutral wire to the power supply neutral wire with wire nut (C). Connect the fixture live/hot wire to the power supply live/hot wire with wire nut (C).

5. Fix back ceiling box (D2), metal ring (E) and calcite shade (F) as from point 10 to point 13 in "ASSEMBLY AND INSTALLTION" section.

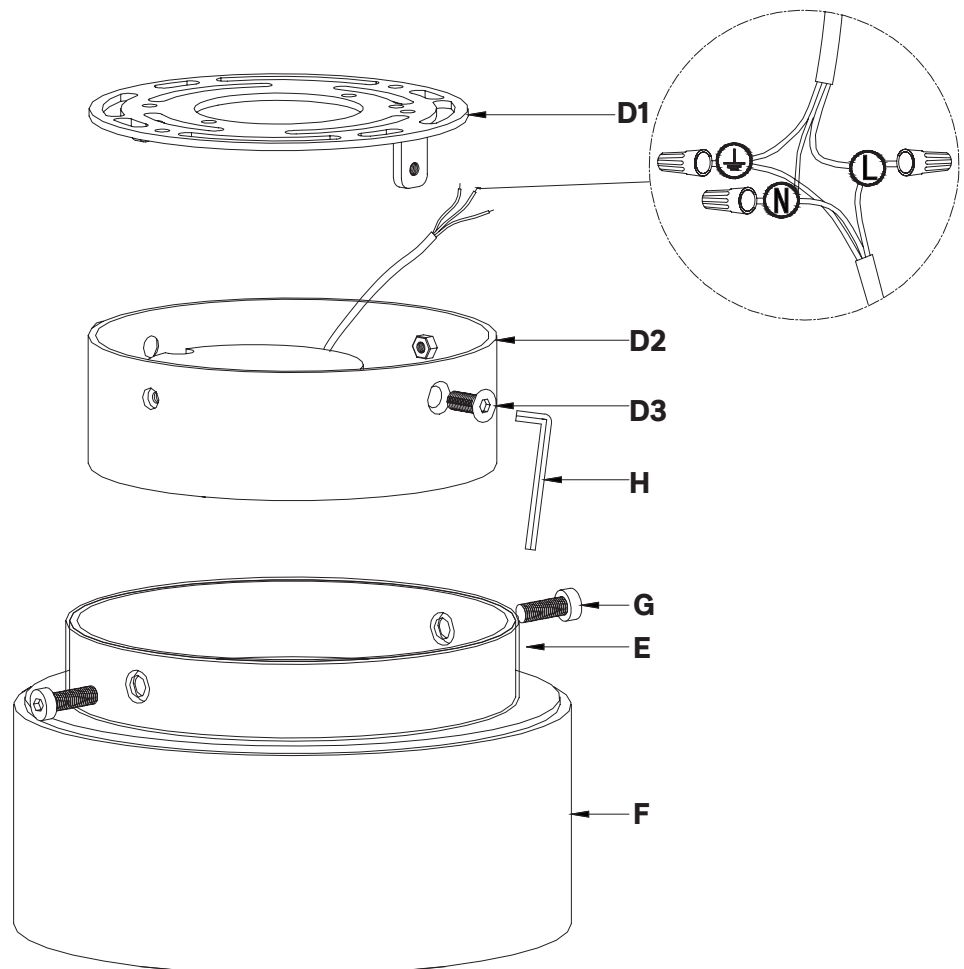




RIVAGE ROUND FLUSHMOUNT 10"

ASSEMBLY & INSTALLATION INSTRUCTIONS

UNITED STATES ENGLISH

RIVAGE ROUND FLUSHMOUNT 10"**PARTS INCLUDED:**

- (A) Junction Box, 50lbs/22.7kg MIN. FIXTURE RATED (not included)
- (B) Mounting Bolts (3 sets; for concrete ceiling only)
- (C) Wire Nuts (3)
- (D1) Ceiling Plate (1)
- (D2) Ceiling Box (1)
- (D3) Bolts (3)
- (E) Metal Ring (1)
- (F) Calcite Shade (1)
- (G) Set Bolts (3)
- (H) Allen Key (1)
- (I) Safety Cable (1)

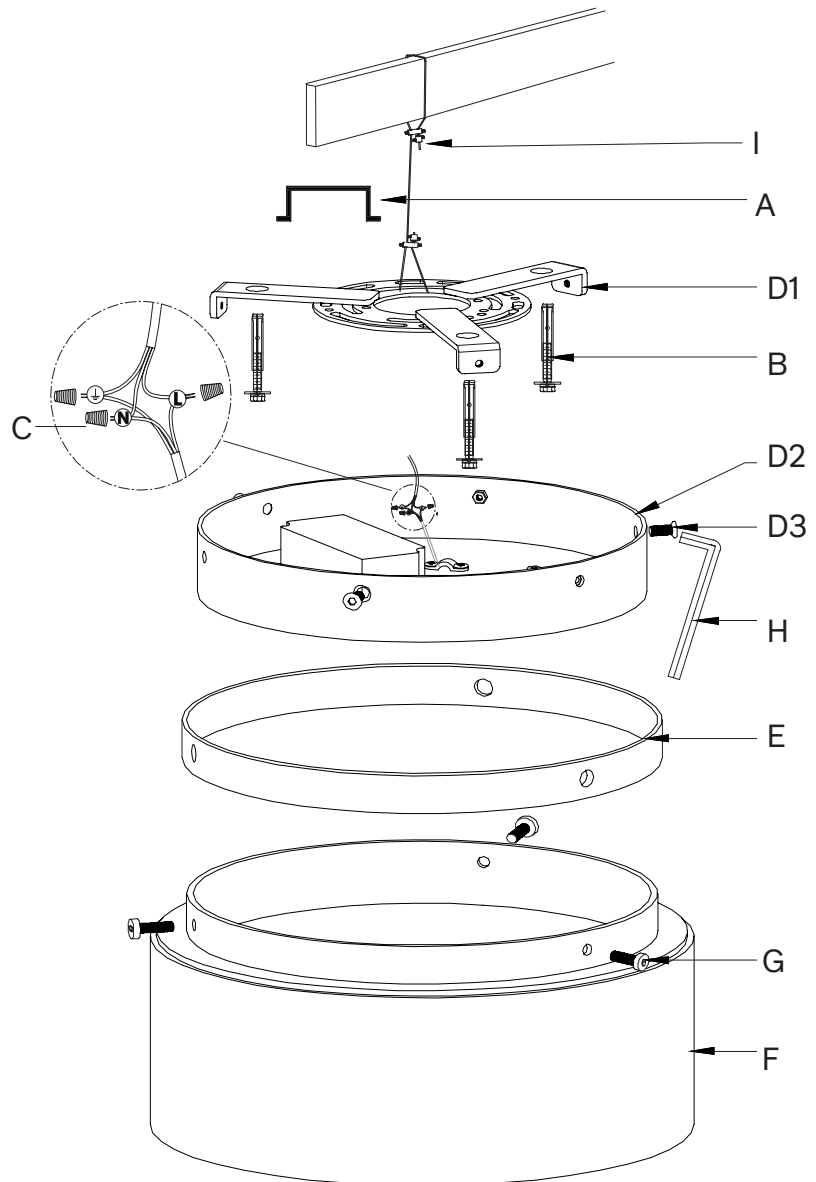

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING TO CONCRETE CEILING. UNIQUE OR ALTERNATIVE INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES**BULBS**

This fixture has been rated for one (1) 20-watt LED module. To avoid the risk of fire, do not exceed the recommended wattage.

VAULTED CEILING COMPATIBILITY

This fixture is vaulted-ceiling compatible.

DIMMER SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible and may be used with a forward-phase dimmer switch.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.

WARNING: STRANGULATION HAZARD


Keep cord at least 3 feet (91cm) away from cribs, bassinets, and toddler beds.

Keep out of reach of children under 3 years of age.


THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

INSTALL SAFETY CABLE:

1. Remove the nut locker A & B by loosening the set screw from the ceiling safety cable before installation.
2. Insert the ceiling safety cable through the nut lockers as the drawing shows.
3. Fasten the nut locker A with set screw/bolt.
4. Fasten the nut locker B with set screw/bolt.

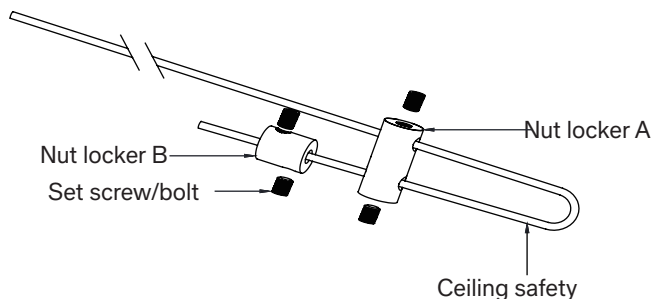

ASSEMBLY AND INSTALLATION**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn OFF power to junction box (A) where the fixture will be installed.
3. Loosen the set bolts (G) and remove the metal ring (E) and calcite shade (F), then loosen the bolts (D3) and remove the ceiling plate (D1) from ceiling box (D2).
4. Have a professional contractor reinforce ceiling. Attach the safety cable (I) to the ceiling beam through the junction box (A), then attach the safety cable to the fixed fixture on the ceiling with the nut locker.
5. Attach the ceiling plate (D1) to the ceiling and secure with mounting bolts (B).
6. Carefully inspect the fixture wires. One is the ground wire (marked with ). The second is the neutral wire (marked with N). The third wire is the live/hot wire (marked with L).
7. Connect the fixture ground wire to the power supply ground wire with wire nut (C).

NOTE: IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.

8. Connect the fixture neutral wire to the power supply neutral wire with wire nut (C).
9. Connect the fixture live/hot wire to the power supply live/hot wire with wire nut (C).

CAUTION: DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, AS SAFETY WILL BE COMPROMISED.

10. Move the ceiling box (D2) up to the ceiling, then fasten the bolts (D3).
11. Locate the metal ring (E) onto the calcite shade (F), then attach the calcite shade (F) to the ceiling box (D2) with set bolts (G).
12. Restore power to the junction box and test fixture.
13. Assembly is complete.

CARE INSTRUCTIONS


Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

LIGHT SOURCE AND LED DRIVER REPLACEMENT INSTRUCTIONS

1. Turn OFF power to junction box.
2. Uninstall the lighting fixture from the ceiling.
3. Loosen the set bolts (G) from calcite shade (F), then remove the metal ring (E) and calcite shade (F) from the ceiling box (D2).
4. Replace the new ceiling box (D2) with fixed with light source and LED driver, then connect power supply wires to input wires from the LED driver with wire nut.

Note: Connect the fixture ground wire to the power supply ground wire with wire nut (C). Connect the fixture neutral wire to the power supply neutral wire with wire nut (C). Connect the fixture live/hot wire to the power supply live/hot wire with wire nut (C).

5. Fix back ceiling box (D2), metal ring (E) and calcite shade (F) as explained in steps 10 to 13 in "ASSEMBLY AND INSTALLTION" section.

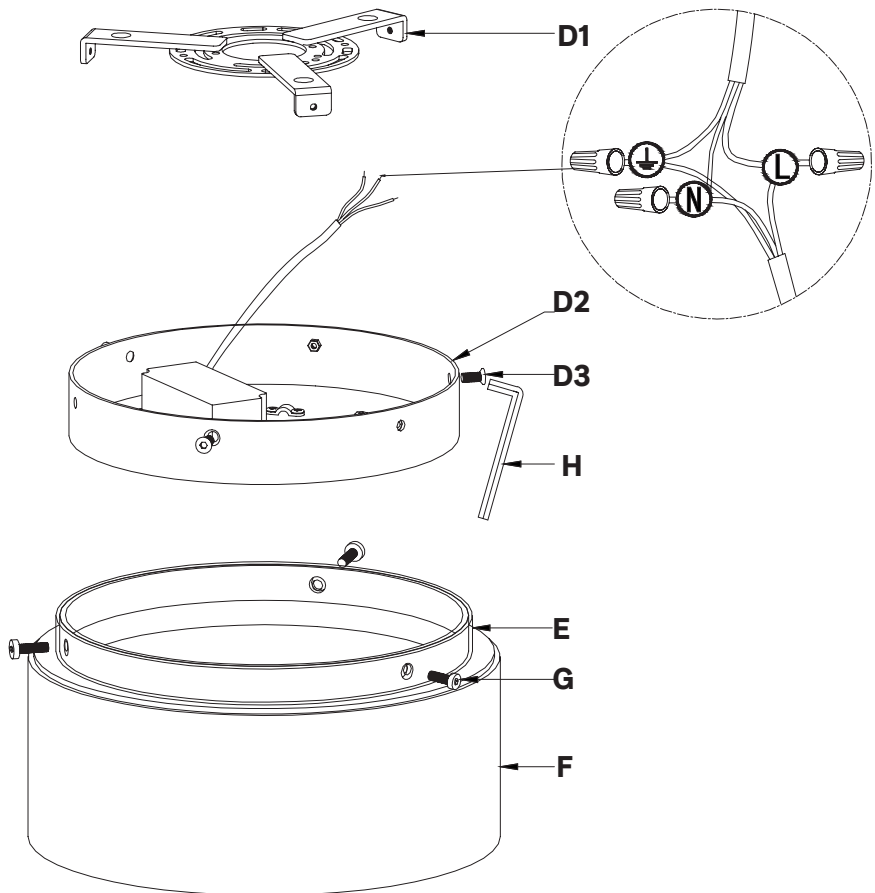




RIVAGE ROUND FLUSHMOUNT 14"

ASSEMBLY & INSTALLATION INSTRUCTIONS

UNITED STATES ENGLISH

RIVAGE ROUND FLUSHMOUNT 14"**PARTS INCLUDED:**

- (A) Junction Box, 50lbs/22.7kg MIN. FIXTURE RATED (not included)
- (B) Mounting Bolts (4 sets; for concrete ceiling only)
- (C) Wire Nuts (3)
- (D1) Ceiling Plate (1)
- (D2) Ceiling Box (1)
- (D3) Bolts (4)
- (E) Metal Ring (1)
- (F) Calcite Shade (1)
- (G) Set Bolts (4)
- (H) Allen Key (1)
- (I) Safety Cable (1)

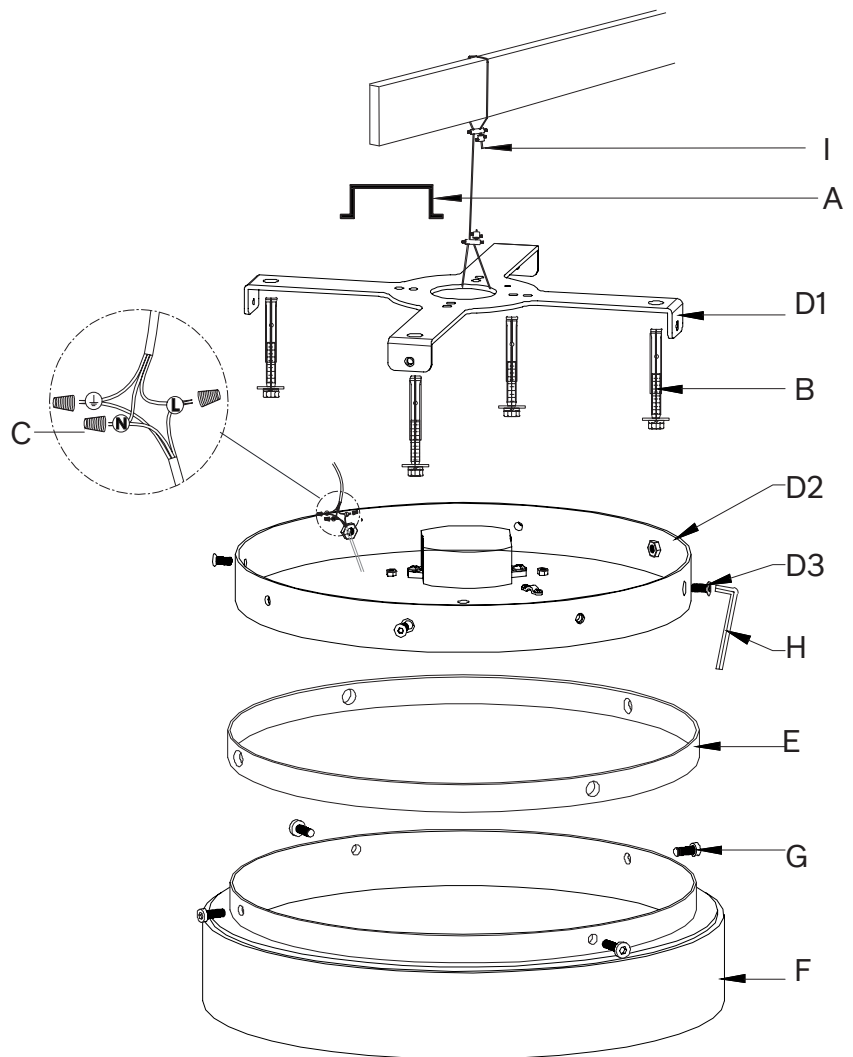

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING TO CONCRETE CEILING. UNIQUE OR ALTERNATIVE INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES**BULBS**

This fixture has been rated for one (1) 24-watt LED module. To avoid the risk of fire, do not exceed the recommended wattage.

VAULTED CEILING COMPATIBILITY

This fixture is vaulted-ceiling compatible.

DIMMER SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible and may be used with a forward-phase dimmer switch.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.

WARNING: STRANGULATION HAZARD


Keep cord at least 3 feet (91cm) away from cribs, bassinets, and toddler beds.

Keep out of reach of children under 3 years of age.


THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

INSTALL SAFETY CABLE:

1. Remove the nut locker A & B by loosening the set screw from the ceiling safety cable before installation.
2. Insert the ceiling safety cable through the nut lockers as the drawing shows.
3. Fasten the nut locker A with set screw/bolt.
4. Fasten the nut locker B with set screw/bolt.

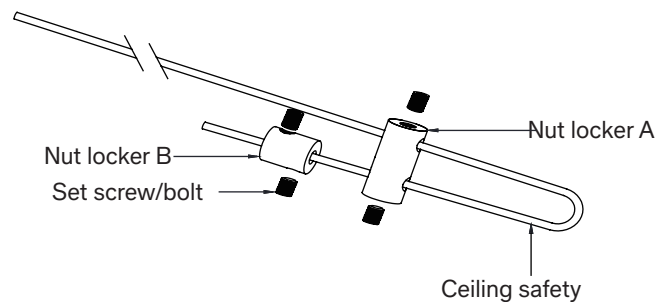

ASSEMBLY AND INSTALLATION**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn OFF power to junction box (A) where the fixture will be installed.
3. Loosen the bolts (G) and remove the metal ring (E) and calcite shade (F), then loosen the bolts (D3) and remove the ceiling plate (D1) from ceiling box (D2).
4. Have a professional contractor reinforce ceiling. Attach the safety cable (I) to the ceiling beam through the junction box (A), then attach the safety cable to the fixed fixture on the ceiling with the nut locker.
5. Attach the ceiling plate (D1) to the ceiling and secure with mounting bolts (B).
6. Carefully inspect the fixture wires. One is the ground wire (marked with ). The second is the neutral wire (marked with N). The third wire is the live/hot wire (marked with L).
7. Connect the fixture ground wire to the power supply ground wire with wire nut (C).

NOTE: IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.

8. Connect the fixture neutral wire to the power supply neutral wire with wire nut (C).
9. Connect the fixture live/hot wire to the power supply live/hot wire with wire nut (C).

CAUTION: DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, AS SAFETY WILL BE COMPROMISED.

10. Move the ceiling box (D2) up to the ceiling, then fasten the bolts (D3).
11. Locate the metal ring (E) onto the calcite shade (F), then attach the calcite shade (F) to the ceiling box (D2) with set bolts (G).
12. Restore power to the junction box and test fixture.
13. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

LIGHT SOURCE AND LED DRIVER REPLACEMENT INSTRUCTIONS

1. Turn OFF power to junction box.
2. Uninstall the lighting fixture from the ceiling.
3. Loosen the set bolts (G) from calcite shade (F), then remove the metal ring (E) and calcite shade (F) from the ceiling box (D2).
4. Replace the new ceiling box (D2) fixed with light source and LED driver, then connect power supply wires to input wires from the LED driver with wire nut.

Note: Connect the fixture ground wire to the power supply ground wire with wire nut (C). Connect the fixture neutral wire to the power supply neutral wire with wire nut (C). Connect the fixture live/hot wire to the power supply live/hot wire with wire nut (C).

5. Fix back ceiling box (D2), metal ring (E) and calcite shade (F) as explained in steps 10 to 13 in "ASSEMBLY AND INSTALLTION" section.

