


# RH

## NATURAL ANTLER SCONCE

---

### PARTS ENCLOSED

- (a) Ground Screw (1)
- (b) Mounting Bracket (1)
- (c) Mounting Nut (1)
- (d) Threaded Joint (1)
- (e) Mounting Plate (1)
- (f) Wire (1)

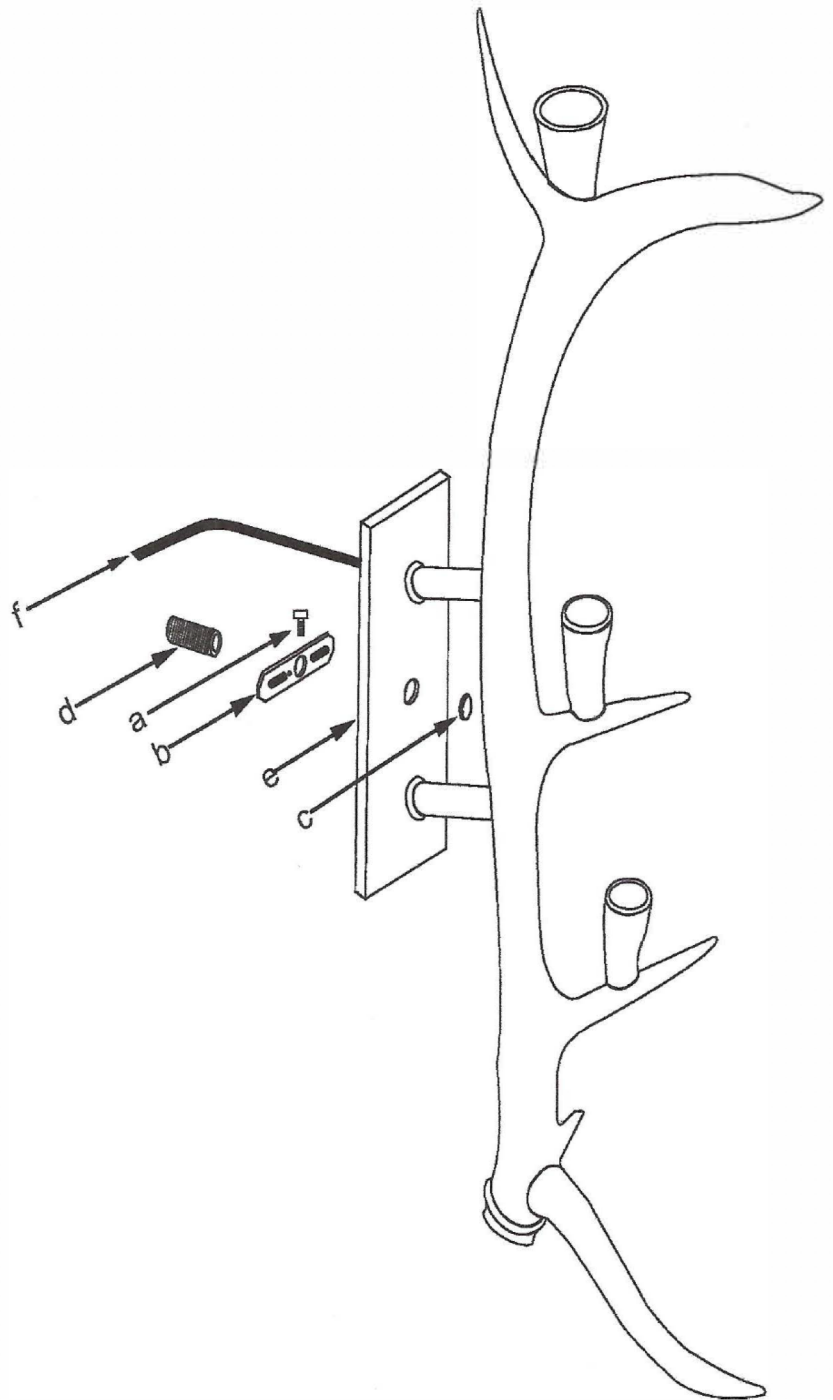



## NATURAL ANTLER SCONCE

---

### IMPORTANT SAFETY INSTRUCTIONS

#### INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED

This fixture has been rated for up to three (3) 60-watt maximum B-12 lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

This fixture must be mounted to an independent wall outlet box.

#### WARNINGS

All wires are connected. When unpacking and installing, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch the bulbs when fixture is turned on or look directly at lit bulbs. Keep flammable materials away from lit bulbs.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



#### WARNING: STANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

### ASSEMBLY & INSTALLATION

1. Turn off power breaker to outlet box and turn switch off prior to installation.
2. Carefully remove all parts from the box and remove all plastic coverings.
3. Cut the wire (f) 12 inches away from fixture mounting plate (e). Separate the neutral and hot wires 6" from end.
4. Affix mounting bracket (b) to wall outlet with mounting screws. Ground screw (a) must be facing outward.
5. Thread the threaded joint (d) through the mounting bracket (b) and adjust according to depth needed for mounting plate (e).
6. Attach ground wire from wall outlet to ground screw (a) located on mounting bracket (b).
7. Connect the neutral wire (white) from outlet box to neutral wire with plastic wire connector and wrap the connection with electrical tape.
8. Connect the hot wire (black) from outlet box to hot wire (f) from fixture.
9. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
10. Carefully tuck the wires back into the outlet box and attach the fixture mounting plate (e). Make sure mounting plate (e) does not pinch wiring.
11. Attach mounting plate (e) securely with mounting nut (c) until hand tight.
12. Insert the recommended bulbs (60-watt max B-12 lightbulbs) into sockets.
13. Assembly is complete.

### CARE INSTRUCTIONS

Do not use polishes or cleaners on your lamp. Just wipe clean with a soft cloth.