

# RESTORATION HARDWARE


Thank you for purchasing Restoration Hardware Lighting. Our assortment is crafted with the highest quality details in mind and each collection is clad in one of our signature finish options. Each item's surface is sealed which eliminates the need for polishing and ensures the lasting brilliance of your piece for years to come.

## PARTS ENCLOSED      HARDWARE INCLUDED


- |                       |                                |
|-----------------------|--------------------------------|
| (A) Mounting plate(1) | (a) Green ground screw (1)     |
|                       | (b) Plastic wire connectors(2) |
| (B) Back plate(1)     | (c) Plate screws(2)            |
|                       | (d) Mounting screws (2)        |
|                       | (e) Bulb (1)                   |

## HARBOR SCONCE & HARBOR FLUSHMOUNT

For sconce

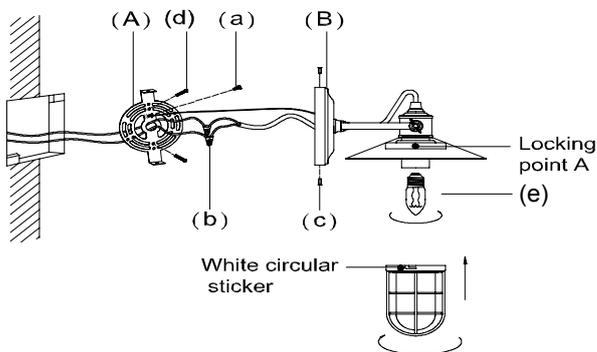

For flushmount

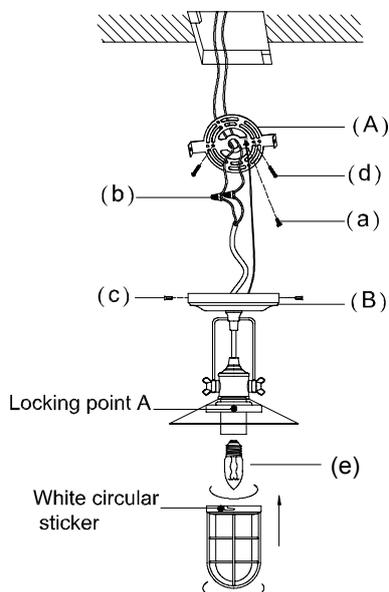

## IMPORTANT SAFETY INSTRUCTIONS

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN

This fixture has been rated for up to (1) 60-watt maximum TYPE B bulb. To avoid the risk of fire, do not exceed the recommended wattage.

## WARNINGS

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your lamp is fully assembled.

To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.

Do not touch bulb when fixture is turned on or look directly at lit bulb.

Limit range of adjustment: Base up vertical +30 / -15 degrees and refer to figure next page.

Keep flammable materials away from lit bulb.

## TO ASSEMBLE

- Carefully remove all parts from the box and remove all plastic covering.
- Turn OFF power to the junction box where the lamp will be installed.
- Pull the electrical cord of "J BOX" through the exit hole of the mounting plate(A).
- Wrap the fixture's bare ground wire around green ground screw(a),and then fix the green ground screw into the mounting plate(A).
- Connect the hot wire to the hot junction box wire (usually black) with a plastic wire connector (b) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire(usually white) with a plastic wire connector(b) and wrap the connection with electrical tape.
- Attach the mounting plate(A) to the outlet box using the mounting screws(d).Tighten with a screwdriver.
- Attach the back plate(B) to the mounting plate(A) using the enclosed plate(c).Tighten screws with a screwdriver.
- Insert a 60-watt Type B bulb into threaded socket.
- Attach the cage by aligning the white circular dot with locking point A. Tighten the cage by twisting it counter-clockwise. To replace the bulb, loosen the cage by twisting it clockwise and replace the old bulb with a new one.
- Restore power to the junction box and test lamp fixture.
- Caulk all sides where the luminaire contact the mounting surface after installation completed for wall mounted unit.

## CARE INSTRUCTIONS

Do not use polishes or cleaners on your lamp.  
JUST WIPE CLEAN WITH SOFT CLOTH.