


light, heaters and automation

Step 1

remove all packaging from in and around umbrella


Step 2

pull pin from cam lock and lift the handle to unlock umbrella




Step 3

once you have leveled the stem using the base installation instructions, slide the beauty cover and umbrella over the security stem (security stem is included with umbrella). Ensure that cables are not pinched when inserting the umbrella over the security stem and when installing the beauty cover.

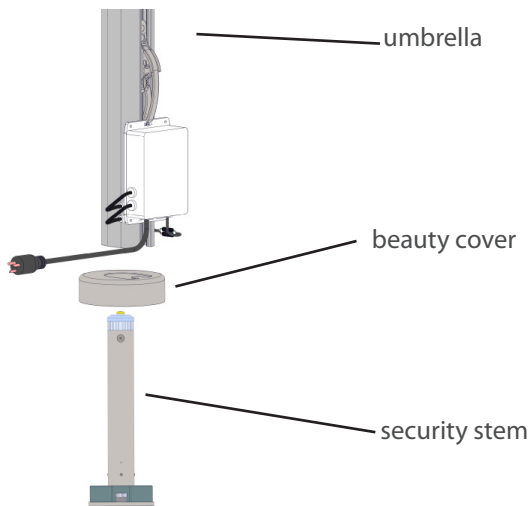

Step 4

lock umbrella down by pushing the cam lock handle in the down position. Mount beauty cover over control box.

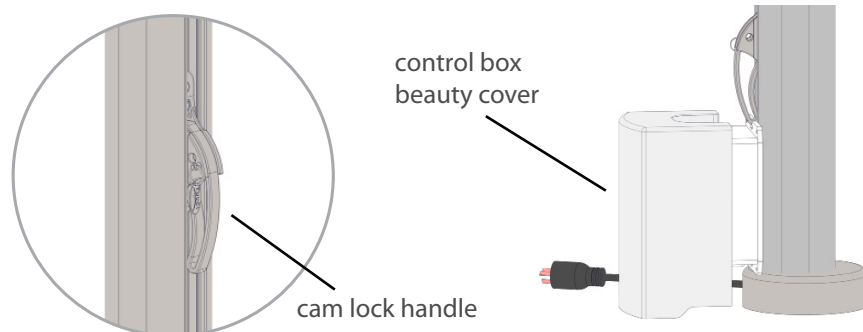

light, heaters and automation



Step 5

Plug in your umbrella into a 220V receptacle. The TUUCI logo on the user control panel will be backlit in white, when the umbrella is properly plugged into the power source.



Step 6

Press the Power button to turn on the umbrella. The button will be backlit in red when the power is ON. In addition, when the umbrella is ON, the open umbrella icon, the closed umbrella icon, the light icon and heater icon will be backlit in white.




Step 7

Press the close umbrella button to move the umbrella down to align with the eye of the cable connector.
Press the close umbrella button again to stop the movement


Step 8

- Pull the security pin from the trolley car bracket.
- Pull the cable connector so it aligns with the trolley car bracket.
- Fasten the cable connector to the trolley bracket with the security pin.

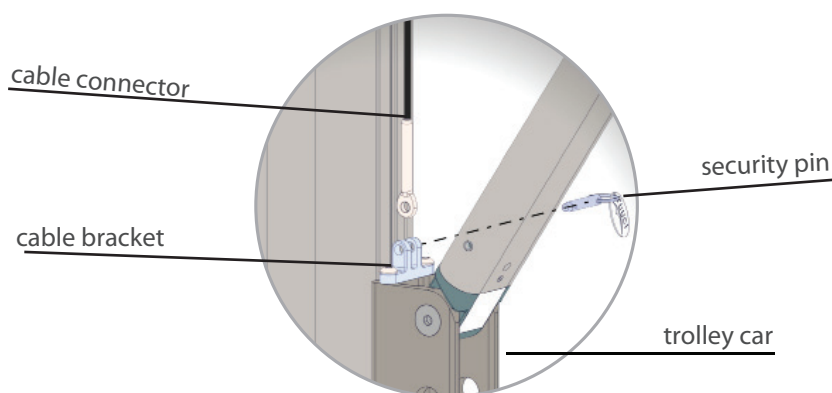

Step 9

Gently separate each rib individually from the center hub approximately 10 inches. If the rib does not move easily, do not force. Inspect the product for additional packaging.

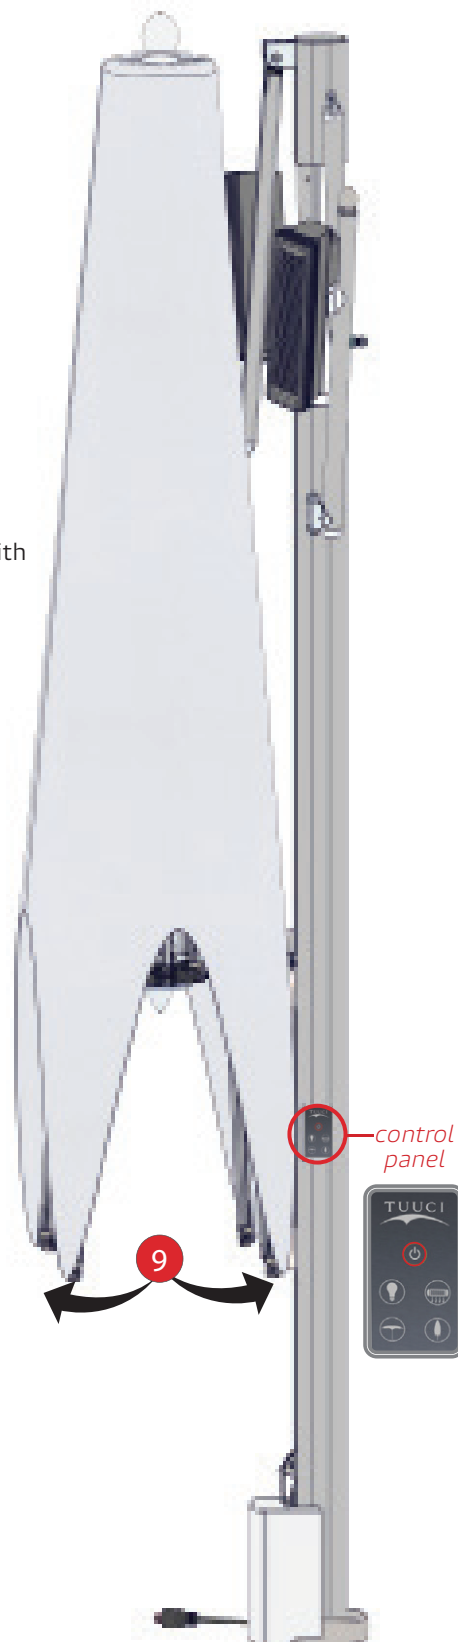

CAUTION

Ensure that your umbrella is level (not tipped or tilted). For safety reasons, If the umbrella is tipped, you will not be able to open or close the umbrella and turn-on the Ambia LED light and heaters.

Ensure that there is nothing blocking the canopy of the umbrella from being fully opened. For safety purposes, the motor has a built-in stop feature if the canopy bumps into an object, when opening or closing.

light, heaters and automation

OPENING UMBRELLA



Opening umbrella

Press the open umbrella icon button to open the umbrella. The color will change from white to blue after pressing the button and during the opening of the umbrella.


When it is fully opened, the button color will change to white. The umbrella must be fully opened for 5 seconds before the Ambia LED can be turned on.

light




Turning the Ambia LED light on

Press the light bulb icon button to turn-on the Ambia LED light. The color will change from white to blue after pressing the button, signaling that the light is ON.




Turning the heaters on

Press the heater icon button to turn-on the heaters. The color will change from white to blue, signaling that both heaters are ON.

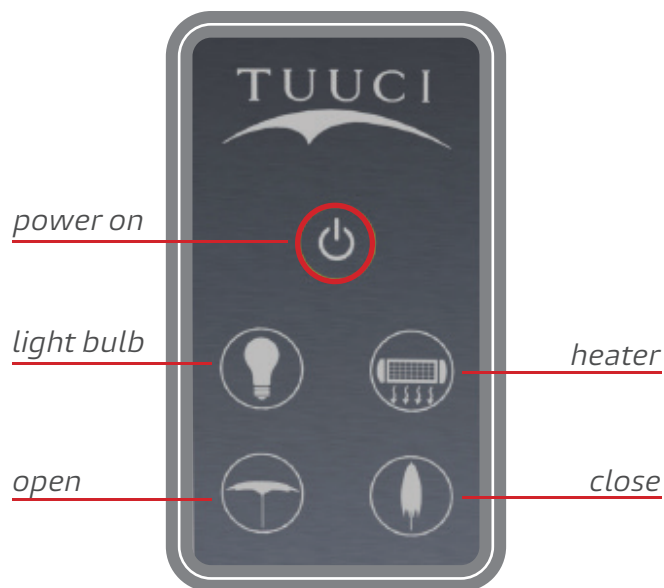

CLOSING UMBRELLA

Instructions to close the Automated Umbrella and turn-off the Ambia LED light and (2) heaters.



Step 1

Press the heater icon button to turn-off both heaters. After pressing the button, the color will change to white, signaling that both heaters are OFF.



Step 2

Press the light bulb icon button to turn-off the Ambia LED light. After pressing the button, the color will change to white, signaling that the light is OFF.



Step 3

Press the close umbrella icon button to close the umbrella. After pressing the button, the color will change from white to blue, signaling that the umbrella will be closing.

When the umbrella is fully closed, the close umbrella icon color will change to white.



Step 4

Press power button to turn off the umbrella.

NOTE:

Close with Cooling Delay – As a safety precaution, If the heaters were ON up to two minutes prior to closing the umbrella, the heaters will go through an automatic cool down period prior to the umbrella closing. The heater icon light on the control panel will flash, signaling the cooling delay period has started. When the cooling delay period is completed, the heater icon button will stop flashing and the umbrella will close automatically.



The duration of the cool down period depends on how long the heaters were OFF prior to closing.

Close without Cooling Delay – If the heaters were never turned-on, or if the heaters were turned OFF two minutes prior to pressing the close umbrella icon button, the cooling time delay will not activate, and the umbrella will close immediately.

Step 5

Close the umbrella with tie-back when not in use.

close umbrella during consistent wind conditions that exceed 25mph.


1005375

light, heaters and automation - features and functions



Emergency shut-down or interrupt feature on the Automated Umbrella control panel

Press the Power button to shut-down or interrupt the operation of any function (Ambia LED light, heaters, open and close). The red light on the Power button will turn OFF. The white lights on the heater icon, the light icon and open and close icon buttons will turn OFF. Press the Power button to turn the umbrella back ON.



Control panel indicator when the Automated Umbrella is not level (tipped or tilted on an angle)

The Power button will be flashing in yellow when the umbrella is not level. All functions (open, close, Ambia LED light and heaters) are inactive. The TUUCI logo is not backlit. When the umbrella is level and no longer tipped or tilted, it will return to a powered down state with the TUUCI logo backlit in white and all other functions OFF. Press the Power button to turn-on the umbrella. Then, turn-on the various functions.




Lock-out unauthorized users from turning-on or -off various features of the Automated Umbrella

There is a lock-out feature to prevent unauthorized user access. To turn-on the lock-out feature, press and hold the Power button for 5 seconds. All functions (Ambia LED light, heaters, open and close) will maintain their original state of ON or OFF. The power button will be a solid yellow when the lock-out feature is activated.


To turn-off the lock-out feature, press and hold the Power button for 5 seconds. All functions (Ambia LED light, heaters, open and close) will maintain their current state of ON or OFF. Users will have access again to turn ON-OFF the various functions.

If the Power button is pressed during a lock-out condition, activating the emergency shut-down or interrupt feature, the Ambia LED light, heaters, open and close umbrella features will be turned-off. All icon button lights will be OFF, except for the TUUCI logo.



Heater Automatic Turn Off Safety Feature

As a safety feature, the heaters on the Automated Umbrella will automatically turn off after 2 hours of operation. To turn the heaters back on, press the heater icon button.

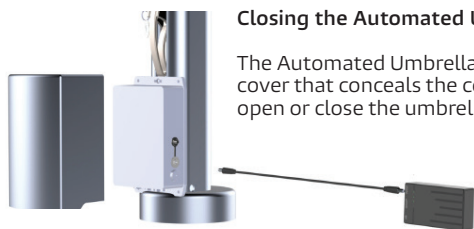

Closing the Automated Umbrella if there is an extended power outage

The Automated Umbrella comes standard with a 12V back-up battery. Unplug power cord and remove the beauty cover that conceals the control box. Plug the battery into the control box. The 12V battery will provide power to open or close the umbrella. The Ambia LED light and the heaters cannot be activated by the back-up battery.



Light Unit, (2) Heaters and Automation:

Power Supply:	
Main Input Voltage:	208-240VAC 50/60 Hz
Max. Amps:	13.7 A @220Volts AC 12.6 A @240Volts AC
Max. Watts:	3010 Watts

North America version:

208-240V, 2 phases 60Hz (requires a minimum 15 Amp circuit)

Umbrella comes with 10ft Power Cord & Plug

(Use with 20A - 250 Volts, NEMA 6-20R Receptacle compatible with NEMA 6-20P Plugs)

Europe version:

220-240V, 1 phase 50Hz (requires a minimum 16 Amp circuit)

Umbrella comes with 10ft Power Cord & Plug

(Use with 16A - 250 Volts, Schuko Receptacle compatible with Schuko 16A - 250 Volts Plug)

Customer must connect to a protected power source circuit with proper Current Rating "Amps", near the umbrella, using an above ground Junction box, according to their local electrical codes and regulations.

warnings & safety instructions

1. Read and understand entire owner's manual before assembling or operating umbrella.
2. Read and understand the warnings posted on the umbrella and/or components installed on the umbrella.
3. Disconnect electrical power to umbrella during inclement weather.
4. There is a risk of fire if heaters contact flammable materials or liquids.
5. Keep children away from power cords on or around umbrella.
6. Disconnect power before removing or servicing umbrella.
7. Allow sufficient cooling of heaters before closing umbrella.
8. Do not use this umbrella for other than its intended use.
9. Replace warning labels if they become obscured or removed.
10. Make sure the umbrella is properly grounded if there are electrical devices installed such as heaters.
11. Provide for adequate space to open and close umbrella without obstructions.
12. Customer's electrical power source connections if any, are to be installed / connected by a certified electrician. check local codes for guidance.
13. When closing / opening umbrella keep hands and face clear of all pinch points, or protruding umbrella components.

for frequently asked questions visit tuuci.com/automationCL

1005375

TUUCI frames are constructed from durable, marine-grade, weather-resistant materials including: fiberglass, armor-wall aluminum, Dura-TEAK composites, Aluma-TEAK aluminum and sustainable hardwood. All fasteners (nuts, bolts, pulleys, cam cleats, etc.) are marine-grade stainless steel and will withstand the most corrosive environments. Proper care and maintenance is important to extend the serviceable life of all TUUCI products. We recommend the following:

- Fresh water rinses once a week
- Weekly inspection of your TUUCI product is recommended. Loose screws should be tightened and any broken components replaced immediately to avoid further damage to your product.
- Prior to opening, ensure that the shade product is properly secured to an adequate shade anchor system.
- When opening a TUUCI parasol, separate each rib 10 inches from the center post, before raising the hub. Do not force hub if it does not rise easily.
- When closing the parasol, pull the fabric out from between the struts to avoid pinching or damaging the TUFF-SKIN canopy membrane.
- TUUCI recommends that all collapsible shade equipment be closed in wind conditions that exceed 25 MPH.
- Clean above-ground parasol bases regularly to maintain appearance. To clean, gently wash with soap and water using a nonabrasive cloth or pad.
- Check bolts in security stem regularly to ensure that they remain fully tightened.
- Do not roll Aluma-crete (Aluminum Shell, Concrete Filled) bases on their side as damage to shell or finish can occur.
- Do not use on stairways or over distances that exceed 50 feet, as damage to welded wheel tray may occur.
- Canopy should be cleaned regularly and can be cleaned without being removed from the frame. Hose down and clean with a mild soap and lukewarm water (no more than 100° F) using a soft bristle brush. Rinse thoroughly to remove soap. Allow fabric to air dry.
- Do not use a pressure washer to clean canopies.