


RESTORATION HARDWARE

Thank you for purchasing Restoration Hardware Lighting. Our assortment is crafted with the highest quality details in mind and each collection is clad in one of our signature finish options. Each item's surface is sealed which eliminates the need for polishing and ensures the lasting brilliance of your piece for years to come.

PARTS ENCLOSED:

- (A) Crossbar
- (B) Mounting screws
- (C) Nipple
- (D) Hex nut
- (E) Collar loop
- (F) Canopy
- (G) Chain
- (H) Collar loop ring
- (I) Fixture loop
- (J) Center column
- (K) Fixture body
- (L) Finial
- (M) Candle sleeve

Crystal Ball 5 Arm Chandelier

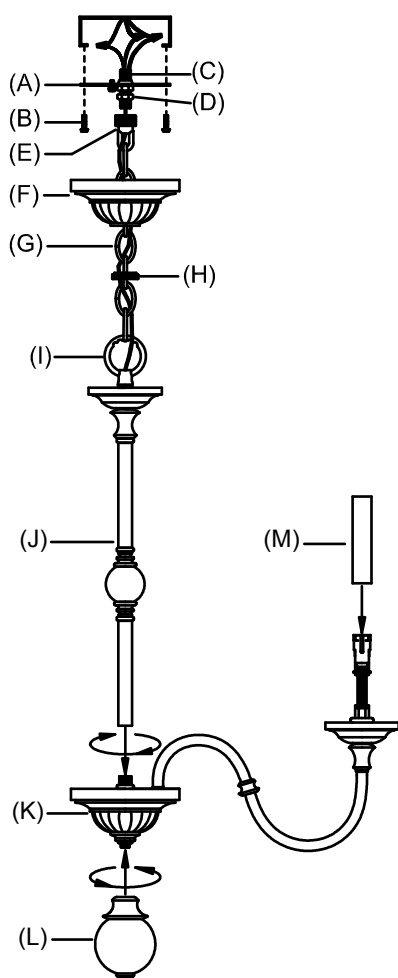

IMPORTANT SAFETY INSTRUCTIONS:

* These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

* **DIRECT WIRE FIXTURES:** We strongly recommend that a professional electrician install the fixture.

WARNINGS:

Turn off power (unplug from the wall outlet) before replacing the bulb(s), making sure the bulb(s) had sufficient time to cool down. **DO NOT** subject the lamp to any shock while lit as shattering of lamp may result.

TO ASSEMBLE:

***TOOLS REQUIRED: CHAIN BREAK

Carefully remove the fixture from the carton and check that all parts shown in drawings are included. Be careful not to misplace any of the parts, as they are needed for installing the fixture.

1. Turn power to the installation point OFF.
2. Locate and install the bottom of center column (J) onto the coupling at top of fixture body (K). Hand tighten until snug.
3. Fasten the crossbar (A) to the outlet box with (2) mounting screws (B). Thread the hex nut (D) onto the nipple (C). Thread the nipple (C) into the center of crossbar (A), tighten hex nut (D) against crossbar (A) with pliers until snug.
4. Locate the chain (G) and determine desired hanging height of fixture. Adjust chain (G) by removing links if needed. Please note that depending on chain material thickness, you might be required to use chain pliers to spread links open. Attach one end of chain (G) to fixture loop (I), attached to top of center column (J). Pass the fixture wires through chain (G) alternating links. Pass the chain (G) through the center holes of collar loop ring (H) and canopy (F).
5. **Making the connections:** (2 people recommended for the remaining steps) Position the fixture under the ceiling mounted outlet box. Thread collar loop (E) onto nipple (C). Thread hex nut (D) down the nipple (C), against the collar loop (E) and snug with pliers. Pass the wires through the nipple (C). Take up wires slack and trim wires so that approx. 6" will remain inside outlet box. Attach the top of chain (G) to the collar loop (E) with chain pliers. Using wire connectors, connect the house ground wire to the fixture ground wire; connect the house white wire to the fixture supply wire (white or ribbed side); connect the house black (or red) wire to the fixture supply wire (black or smooth side). Wrap all connections with approved electrical tape.
6. With the proper connections made, push all wires back into the ceiling mounted outlet box.
7. Slide canopy (F) up chain (G) and hold tightly against ceiling. Slide collar loop ring (H) up chain (G) and thread onto collar loop (E) to hold canopy (F) against ceiling.
8. Thread the top end of finial (L) onto the protruding nipple from bottom of fixture body (K) as shown in the diagram. Hand tighten until snug.
9. Carefully place the candle sleeve (M) over the socket on fixture.
10. Install (5) **Type B, Maximum 40-watt** light bulbs (not provided) into sockets.
11. Your new fixture is now ready for use. Retain this sheet for future reference.

CARE INSTRUCTIONS:

Wipe clean using a soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.