

# RESTORATION HARDWARE


## VENDOME ROUND CHANDELIER 36"

### PARTS ENCLOSED

- |                            |                            |
|----------------------------|----------------------------|
| (A) Mounting Plate (1)     | (J) Connectors (5)         |
| (B) Mounting Loop (1)      | (K) Threaded Joint (1)     |
| (C) Closable Link (1)      | (L) 12" Extension Rods (2) |
| (D) Metal Cover (1)        | (M) 6" Extension Rods (2)  |
| (E) Screws (2)             | (N) Light bulbs (8)        |
| (F) Hanging Loop (1)       | (O) Cap nuts (16)          |
| (G) Canopy (1)             | (P) Glass Shades (8)       |
| (H) 18" Extension Rods (2) | (Q) Support bars (8)       |
| (I) Canopy Ring (1)        |                            |

### SAFETY CABLE ASSEMBLY

1. Join fixture safety cable with safety cable from ceiling.
2. Wrap both safety cables around the cable lock nut.
3. Secure by tightening both hex nuts until tight.

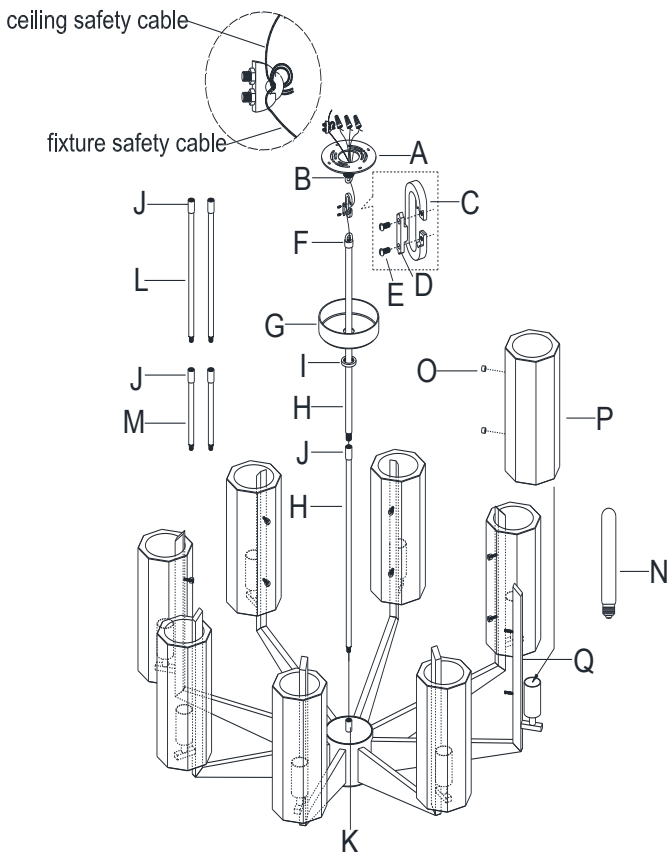

### IMPORTANT SAFETY INSTRUCTIONS

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to eight (8) 40-watt maximum Type T bulbs (30-watt light bulbs (N) included) or eight (8) 9-watt compact fluorescent light bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

### WARNINGS

1. All wires are connected.
2. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
3. Do not connect electricity until your lamp is fully assembled.
4. Do not touch bulb when fixture is turned on or look directly at lit bulb.
5. Keep flammable materials away from lit bulb.
6. This fixture must be supported independent of an outlet box. Professional installation is strongly recommended.
7. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects, and other reproductive harm. Wash hands after installing, handling, cleaning, or otherwise, touching this light fixture.

### TO ASSEMBLE

1. Carefully remove all parts from the box and remove all plastic covering.
2. Determine the hanging length of chandelier. Connect some or all connection rods (H) (L) (M) and connectors (J) to the threaded joint (K) according to the height needed.
3. Slide canopy ring (I) and canopy (G) onto the connection rod (H).
4. THIS FIXTURE MUST BE SUPPORTED INDEPENDENT OF AN OUTLET BOX.
5. Attach mounting plate (A) to ceiling and secure with mounting screws appropriate for your installation (not included). Check with your local hardware store.
6. Remove the metal cover (D) from closable link (C) by removing screws (E).
7. Hang chandelier by joining mounting loops (B), closable link (C), and hanging loop (F) together. Secure by replacing metal cover (D) to closable link (C). Tighten with screws (E).
8. Gently pull the wire from ceiling outlet box and allow the wire to hang. Thread the wire through the center hole in mounting plate (A).
9. Connect the safety steel wire from the fixture and the safety cable from ceiling. (Refer to the illustration.)
10. Carefully inspect the chandelier's two fixture wires. One has very fine ridges molded into the plastic covering – this is the NEUTRAL WIRE. The second wire's covering is smooth – this is the HOT WIRE. The bare wire is the GROUND WIRE.
11. Connect the GROUND WIRE from the fixture with the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the GROUND WIRE from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
12. Connect the NEUTRAL WIRE from your fixture with the neutral wire (usually white) from your ceiling box using a wire nut.
13. Connect the HOT WIRE from your fixture with the hot wire (usually black) from your outlet box using a wire nut. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
14. Raise canopy (G) to the affixed mounting plate (A) and secure with canopy ring (I).
15. Remove cap nuts (O) from the nipples of support bars (Q), attach shades (P) to the support bars (Q), letting the nipple pass through the holes on shades (P), and secure with cap nuts (O).
16. Insert the recommended bulbs (N) into the sockets.
17. Restore power to outlet box and check operation of fixture.
18. Assembly is complete.

### CARE INSTRUCTIONS

Avoid the use of all polishers, cleaners, and abrasives, as they will damage the finish of your lamp. To remove dust or fingerprints, wipe gently with a soft, clean cloth.