

# RESTORATION HARDWARE

Thank you for purchasing Restoration Hardware Lighting. Our assortment is crafted with the highest quality details in mind and each collection is clad in one of our signature finish options. Each item's surface is sealed which eliminates the need for polishing and ensures the lasting brilliance of your piece for years to come.

## PARTS ENCLOSED :

- (A) Canopy (1)
- (B) Screw (1)
- (C) Cap (1)
- (a) Wire Connector (2)
- (b) Mounting Bar (1)
- (c) Dimple (2)
- (d) Green Ground Screw (1)
- (e) Outlet Box Screw (2)
- (f) Ground Wire (1)
- (g) Mounting Screw (2)

## IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to (2) 40-watt maximum Type B bulbs (the bulbs are included).

To avoid the risk of fire, do not exceed the recommended wattage

## WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug fixture and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.


## TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the fixture will be installed.
3. Insert the wire through the center hole of the mounting bar (b).
4. Attach the ground wire (f) from the fixture to the ground junction box wire from the outlet box (usually green or bare wire) with a plastic wire connector (not supplied) and wrap the connection with electrical tape. Screw the green ground screw (d) onto the mounting plate (b) near the dimples (c), and wrap the fixture's bare ground wire around the ground screw. Then tighten the screw.
5. Connect the hot wire to the hot junction box wire (usually black) with a plastic wire connector (a) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction wire (usually white) with a plastic wire connector (a) and wrap the connection with electrical tape.
6. Attach the mounting bar (b) to the outlet box using the outlet box screws (e). Tighten with a screwdriver.
7. After wires are connected, tuck them carefully inside outlet box. Raise the canopy (A) allowing for the mounting screws (g) to protrude through key slots. Rotate the canopy (A) clockwise until the mounting screws (g) are in narrow part of key slots, tighten with screwdriver.
8. Put the cap (C) into the canopy (A) and tighten the screw (B).
9. Insert the recommended 40-watt Type B bulbs (included) into the threaded sockets.
10. Restore power to the junction box and test lamp fixture.
11. Assembly is complete.

## CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap. Do not use abrasive harsh cleansers or abrasives.

## Turner 9" Flush Mount

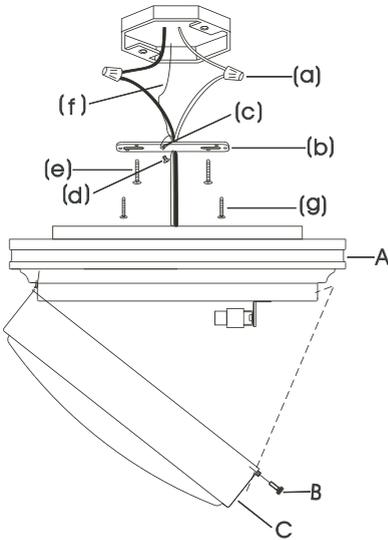

## Direct Wire Installation

# RESTORATION HARDWARE

Thank you for purchasing Restoration Hardware Lighting. Our assortment is crafted with the highest quality details in mind and each collection is clad in one of our signature finish options. Each item's surface is sealed which eliminates the need for polishing and ensures the lasting brilliance of your piece for years to come.

## PARTS ENCLOSED:

- |                |                            |
|----------------|----------------------------|
| (A) Canopy (1) | (a) Wire Connector (2)     |
| (B) Screw (1)  | (b) Mounting Bar (1)       |
| (C) Cap (1)    | (c) Dimple (2)             |
|                | (d) Green Ground Screw (1) |
|                | (e) Outlet Box Screw (2)   |
|                | (f) Ground Wire (1)        |
|                | (g) Mounting Screw (2)     |

## IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to (2) 60-watt maximum Type B bulbs (the bulbs are included).

To avoid the risk of fire, do not exceed the recommended wattage.

## WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug fixture and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.


## TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the fixture will be installed.
3. Insert the wire through the center hole of the mounting bar (b).
4. Attach the ground wire (f) from the fixture to the ground junction box wire from the outlet box (usually green or bare wire) with a plastic wire connector (not supplied) and wrap the connection with electrical tape. Screw the green ground screw (d) onto the mounting plate (b) near the dimples (c), and wrap the fixture's bare ground wire around the ground screw. Then tighten the screw.
5. Connect the hot wire to the hot junction box wire (usually black) with a plastic wire connector (a) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction wire (usually white) with a plastic wire connector (a) and wrap the connection with electrical tape.
6. Attach the mounting bar (b) to the outlet box using the outlet box screws (e). Tighten with a screwdriver.
7. After wires are connected, tuck them carefully inside outlet box. Raise the canopy (A) allowing for the mounting screws (g) to protrude through key slots. Rotate the canopy (A) clockwise until the mounting screws (g) are in narrow part of key slots, tighten with screwdriver .
8. Put the cap (C) into the canopy (A) and tighten the screw (B) .
9. Insert the recommended 60-watt Type B bulbs (included) into the threaded sockets.
10. Restore power to the junction box and test lamp fixture.
11. Assembly is complete.

## CARE INSTRUCTIONS :

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap. Do not use abrasive harsh cleansers or abrasives.

Turner 12 " Flush Mount

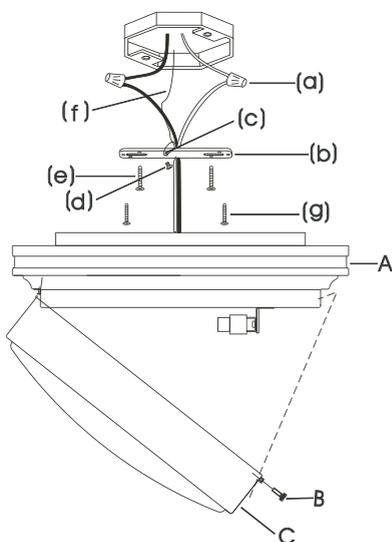

Direct Wire Installation

# RESTORATION HARDWARE

Thank you for purchasing Restoration Hardware Lighting. Our assortment is crafted with the highest quality details in mind and each collection is clad in one of our signature finish options. Each item's surface is sealed which eliminates the need for polishing and ensures the lasting brilliance of your piece for years to come.

## PARTS ENCLOSED:

- |                |                            |
|----------------|----------------------------|
| (A) Canopy (1) | (a) Wire Connector (2)     |
| (B) Screw (1)  | (b) Mounting Bar (1)       |
| (C) Cap (1)    | (c) Dimple (2)             |
|                | (d) Green Ground Screw (1) |
|                | (e) Outlet Box Screw (2)   |
|                | (f) Ground Wire (1)        |
|                | (g) Mounting Screw (2)     |

## IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to (3) 40-watt maximum Type B bulbs (the bulbs are included). To avoid the risk of fire, do not exceed the recommended wattage.

## WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug fixture and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.


## TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the fixture will be installed.
3. Insert the wire through the center hole of the mounting bar (b).
4. Attach the ground wire (f) from the fixture to the ground junction box wire from the outlet box (usually green or bare wire) with a plastic wire connector (not supplied) and wrap the connection with electrical tape. Screw the green ground screw (d) onto the mounting plate (b) near the dimples (c), and wrap the fixture's bare ground wire around the ground screw. Then tighten the screw.
5. Connect the hot wire to the hot junction box wire (usually black) with a plastic wire connector (a) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction wire (usually white) with a plastic wire connector (a) and wrap the connection with electrical tape.
6. Attach the mounting bar (b) to the outlet box using the outlet box screws (e). Tighten with a screwdriver.
7. After wires are connected, tuck them carefully inside outlet box. Raise the canopy (A) allowing for the mounting screws (g) to protrude through key slots. Rotate the canopy (A) clockwise until the mounting screws (g) are in narrow part of key slots, tighten with screwdriver.
8. Put the cap (C) into the canopy (A) and tighten the screw (B).
9. Insert the recommended 40-watt Type B bulbs (included) into the threaded sockets.
10. Restore power to the junction box and test lamp fixture.
11. Assembly is complete.

## CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap. Do not use abrasive harsh cleansers or abrasives

Turner 15" Flush Mount

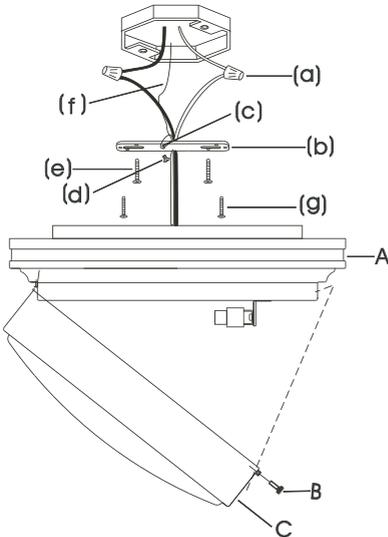

Direct Wire Installation