

## LYNX CHANDELIER 40"


### PARTS ENCLOSED

- (A) Mounting Strap (1)
- (B) Threaded Nipple (1)
- (C) Mounting Loop (1)
- (D) Canopy (1)
- (E) Canopy Ring (1)
- (F) Chain (1)
- (G) Top Loop (1)
- (H) Metal Cover (1)
- (I) Set Screw (1)
- (J) Metal Tube (1)
- (K) Inner Rod (1)
- (L) Joint (1)
- (M) Light Fixture (1)
- (N) Crystal Finials (16)
- (O) Bulbs (16)

### SAFETY CABLE

#### ASSEMBLY

1. Join fixture safety cable with safety cable from ceiling.
2. Wrap both safety cables around the cable lock nut.
3. Secure by tightening both hex nuts until tight.

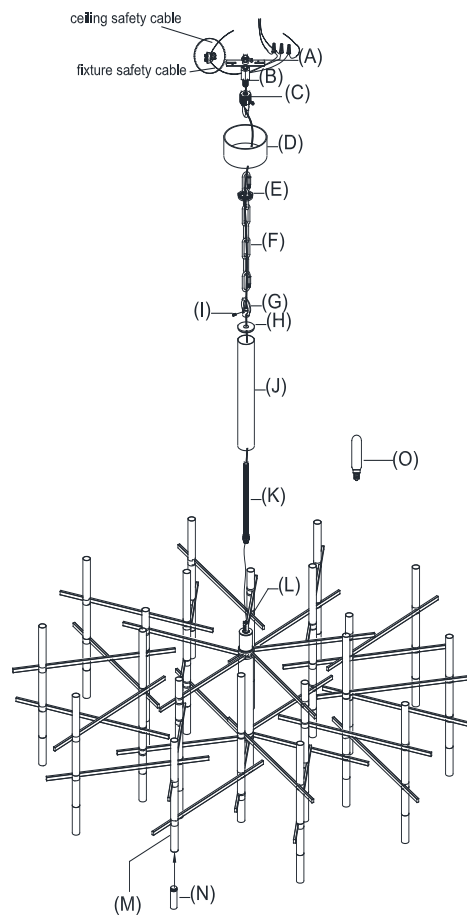

## LYNX CHANDELIER 40"

## IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for sixteen (16) 25-Watt maximum TYPE T standard bulbs (O) (included) OR sixteen (16) 9-Watt compact fluorescent bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

## WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.**

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

## ASSEMBLY &amp; INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic covering.
2. Feed the wires through the Inner Rod (K), Rod (J), Metal Cover (H), Top Loop (G), Chain (F), Canopy (D), and Mounting Loop (C).
3. Thread Inner Rod (K) into the Joint (L) by turning clockwise direction with hand until tight.
4. Slide Metal Tube (J) onto the Joint (L) and Inner Rod (K), and cover the top with Metal Cover (H)
5. Loosen Set Screw (I), screw the Top Loop (G) onto the top of Inner Rod (K), and secure by tightening Set Screw (I).

## ASSEMBLY &amp; INSTALLATION CONT.

6. Hook the Chain (F) to the Top Loop (G) on Light Fixture (M).
7. Unscrewing Canopy Ring (E), slide Canopy Ring (E) and Canopy (D) on Chain (F).
8. Attach Mounting Strap (A) to ceiling and secure with mounting screws (not included)/proper fasteners from your local hardware store.
9. Attach Mounting Loop (C) to the Threaded Nipple (B) and tighten the set screw.
10. Attach Chain (F) with fixture to chain Mounting Loop (C) at desired height.
11. Connect the safety steel wire from the fixture and the safety cable from ceiling. (Refer to the illustration.)
12. Gently pull the wiring from the ceiling outlet box and allow the wires to hang. Thread the wires through the center hole in the Mounting Strap (A).
13. Carefully inspect the chandelier's two fixture wires. One has very fine ridges molded into the plastic covering – this is the NEUTRAL WIRE. The second wire's covering is smooth – this is the HOT WIRE. The bare wire is the GROUND WIRE.
14. Connect the ground wire from the fixture with the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the ground wire from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
15. Connect the neutral wire from your fixture with the neutral wire (usually white) from your ceiling box using a wire nut.
16. Connect the HOT WIRE from your fixture with the hot wire (usually black) from your outlet box using a wire nut. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
17. Slip Canopy (D) to ceiling and secure with Canopy Ring (E).
18. Thread the top of the Crystal Finials (N) onto the bottom of each arm of the Light Fixture (M).
19. Insert Bulbs (O) into the sockets.
20. Restore power and test fixture. Assembly is complete.

## CARE INSTRUCTIONS

Do not use polishes or cleaners on your lamp. Just wipe clean with a soft cloth.