



ST HONORE ROUND CHANDELIER 17" ASSEMBLY INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation.
2. This fixture has been rated for 5 x 40-watt maximum E12 standard bulb.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The ceiling must have at least the capacity of 5 times the weight of the ceiling light (19.4 LBS). For this light at least a ceiling capacity of 97 LBS is required.
5. The manufacturer and distributor accept no liability for incorrect installation.
6. For indoor use only.
7. Keep away from children

WARNINGS:

1. Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
4. Deviation from instructions may result in a risk of fire or electric shock.

TO ASSEMBLE :

1. Unscrew the top panel of the box (the 4 indicated screws) and remove the panel.
2. On the left outside panel of the box, unscrew the 3 indicated screws.
3. Remove the iron bar from the round hook (J)
4. Take out the inner box (K).
5. Carefully remove all parts from the box and remove all plastic covering.
6. Turn OFF power to the junction box where the ceiling light will be installed.
7. Determine the height at which the fixture (L) is to be hung. If necessary, remove the quick link (F) from the end of the chain (G) and shorten the chain by removing the desired number of links using chain pliers. Reattach the quick link to the end of the chain.
8. Close the quick link F.
9. Weave the power cord through the links of the chain, and trim the power cord to the length of the chain plus 8 inches. Feed the outlet box conductors through the mounting plate (not included) and attach the mounting plate to the ceiling structure by using appropriate fasteners (not included).
10. Make appropriate electrical connections using wire nuts:
 - a) Connect the fixture's live wire (black) to the live outlet box wire.
 - b) Connect the fixture's neutral wire (white) to the neutral outlet box wire
 - c) Connect the fixture's ground wire (green or uncoated) to the ground outlet box wire.
11. Raise Canopy (E) to the mounting plate. Secure it by crewing collar (D4) onto the bushing.
12. Install round crystal ball (8) by slighting the iron wire attached to the ball through hole (M) and turn the remaining iron wire at least 3 times to ensure correct fixation.
13. Position candle sleeves (H) and wax sleeves (I) on the bulb holders (5 times)
14. Install (5) bulbs (M).
15. Restore power to the fixture.

CARE INSTRUCTIONS:












1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.


ENVIRONMENT:








Special waste handling may be required.

Please contact your local authorities for more information.

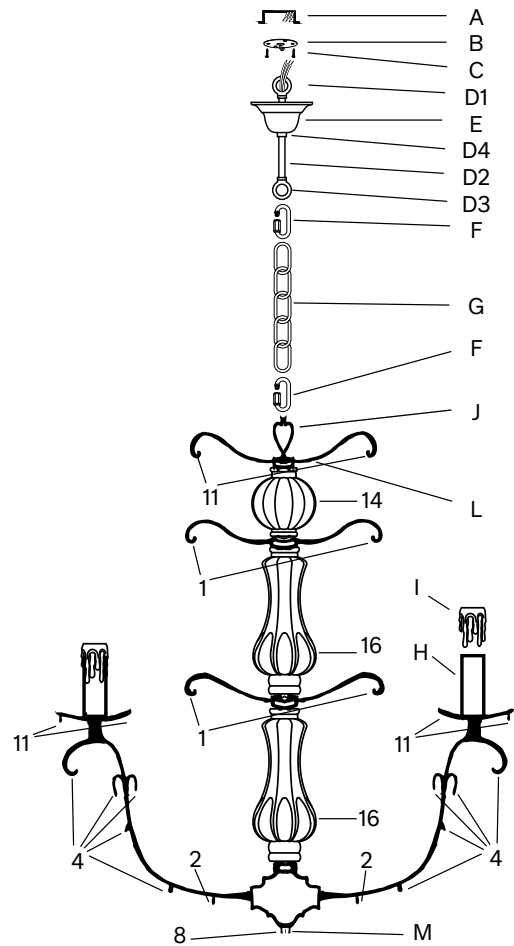ST HONORE ROUND CHANDELIER 17" ASSEMBLY INSTRUCTIONS

PARTS ENCLOSED			
ITEMS	DIAGRAM	DESCRIPTION	QTY
A		Junction Box (Not included) 80Lb. Min. Fixture rated	1
B		Ceiling Hook (Not included)	1
C		Mounting Screws (Not included)	1 Set
D1		round hook	1
E		canopy	1
D4		collar	1
D2		hang straight	1
D3		round hook	1
F		quick link	1
G		chain	1
F		quick link	1
H		Candle sleeve	5
I		Wax sleeve	5
K		Inner box foam	1
L		Body	1



1 18 mm x 1 PC  50 x 28 mm 5 + 1 PCS	2 20 mm x 1 PC  76 x 47 mm 5 + 1 PCS	4 20 mm x 1 PC  90 x 62 mm 35 + 2 PCS	8 50 mm x 1 PC  Ø 60 mm 1 PCS	11 12 mm x 2 PC  Ø 25 mm 25 + 2 PCS	14  85 x 79 mm 1 PCS	16  168 x 72 mm 2 PCS
---	---	--	--	--	---	--



ST HONORE ROUND CHANDELIER 27" ASSEMBLY INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation.
2. This fixture has been rated for 9 x 40-watt maximum E12 standard bulb.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The ceiling must have at least the capacity of 5 times the weight of the ceiling light (36.2 LBS). For this light at least a ceiling capacity of 181 LBS is required.
5. The manufacturer and distributor accept no liability for incorrect installation.
6. For indoor use only.
7. Keep away from children

WARNINGS:

1. Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
4. Deviation from instructions may result in a risk of fire or electric shock.

TO ASSEMBLE :

1. Unscrew the top panel of the box (the 4 indicated screws) and remove the panel.
2. On the left outside panel of the box, unscrew the 3 indicated screws.
3. Remove the iron bar from the round hook (J)
4. Take out the inner box (K).
5. Carefully remove all parts from the box and remove all plastic covering.
6. Turn OFF power to the junction box where the ceiling light will be installed.
7. Determine the height at which the fixture (L) is to be hung. If necessary, remove the quick link (F) from the end of the chain (G) and shorten the chain by removing the desired number of links using chain pliers. Reattach the quick link to the end of the chain.
8. Close the quick link F.
9. Weave the power cord through the links of the chain, and trim the power cord to the length of the chain plus 8 inches. Feed the outlet box conductors through the mounting plate (not included) and attach the mounting plate to the ceiling structure by using appropriate fasteners (not included).
10. Make appropriate electrical connections using wire nuts:
 - a) Connect the fixture's live wire (black) to the live outlet box wire.
 - b) Connect the fixture's neutral wire (white) to the neutral outlet box wire
 - c) Connect the fixture's ground wire (green or uncoated) to the ground outlet box wire.
11. Raise Canopy (E) to the mounting plate. Secure it by crewing collar (D4) onto the bushing.
12. Install round crystal ball (9) by slighting the iron wire attached to the ball through hole (M) and turn the remaining iron wire at least 3 times to ensure correct fixation.
13. Position candle sleeves (H) and was sleeves (I) (8 times).
14. Position crystal fixture (18) on the central bulbholder.
15. Install (9) bulbs (M).
16. Restore power to the fixture.

CARE INSTRUCTIONS:












1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.


ENVIRONMENT:









Special waste handling may be required.

Please contact your local authorities for more information.

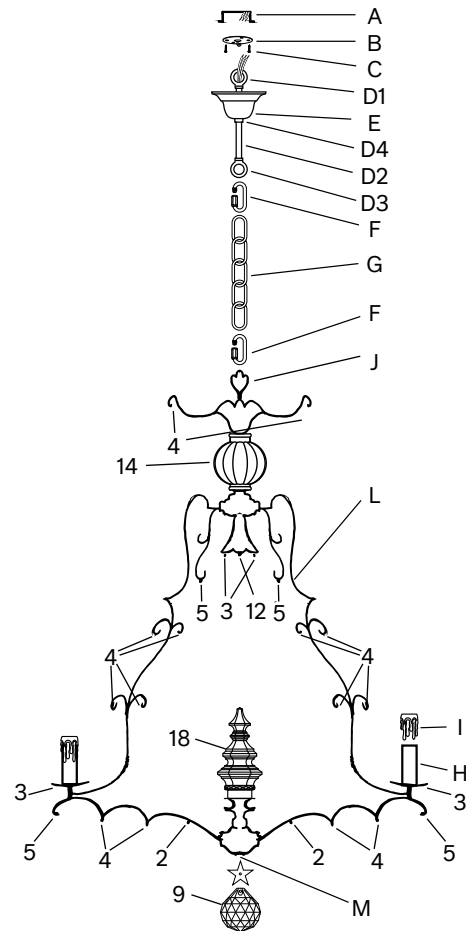ST HONORE ROUND CHANDELIER 27" ASSEMBLY INSTRUCTIONS

PARTS ENCLOSED			
ITEMS	DIAGRAM	DESCRIPTION	QTY
A		Junction Box (Not included) 80Lb. Min. Fixture rated	1
B		Ceiling Hook (Not included)	1
C		Mounting Screws (Not included)	1 Set
D1		round hook	1
E		canopy	1
D4		collar	1
D2		hang straight	1
D3		round hook	1
F		quick link	1
G		chain	1
F		quick link	1
H		Candle sleeve	5
I		Wax sleeve	5
K		Inner box foam	1
L		Body	1



2 20 mm x 1 PC  76 x 47 mm 8 + 2 PCS	3 18 mm x 1 PC  89 x 21 mm 36 + 2 PCS	4 20 mm x 1 PC  90 x 62 mm 30 + 2 PCS	7 22 mm x 1 PC  102 x 56 mm 36 + 2 PCS	9 50 mm x 1 PC  Ø 80 mm 1 PCS	12 10 mm x 2 PC  Ø 35 mm 1 PCS	14  85 x 79 mm 1 PCS	18  172 x 83 mm 1 PCS
---	---	--	---	--	--	---	--



ST HONORE ROUND CHANDELIER 32" ASSEMBLY INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation.
2. This fixture has been rated for 12 x 40-watt maximum E12 standard bulb.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The ceiling must have at least the capacity of 5 times the weight of the ceiling light (61.7 LBS). For this light at least a ceiling capacity of 308.5 LBS is required.
5. The manufacturer and distributor accept no liability for incorrect installation.
6. For indoor use only.
7. Keep away from children

WARNINGS:

1. Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
4. Deviation from instructions may result in a risk of fire or electric shock.

TO ASSEMBLE :

1. Unscrew the top panel of the box (the 4 indicated screws) and remove the panel.
2. On the left outside panel of the box, unscrew the 3 indicated screws.
3. Remove the iron bar from the round hook (J)
4. Take out the inner box (K).
5. Carefully remove all parts from the box and remove all plastic covering.
6. Turn OFF power to the junction box where the ceiling light will be installed.
7. Determine the height at which the fixture (L) is to be hung. If necessary, remove the quick link (F) from the end of the chain (G) and shorten the chain by removing the desired number of links using chain pliers. Reattach the quick link to the end of the chain.
8. Close the quick link F.
9. Weave the power cord through the links of the chain, and trim the power cord to the length of the chain plus 8 inches. Feed the outlet box conductors through the mounting plate (not included) and attach the mounting plate to the ceiling structure by using appropriate fasteners (not included).
 - a) Connect the fixture's live wire (black) to the live outlet box wire.
 - b) Connect the fixture's neutral wire (white) to the neutral outlet box wire
 - c) Connect the fixture's ground wire (green or uncoated) to the ground outlet box wire.
11. Raise Canopy (E) to the mounting plate. Secure it by crewing collar (D4) onto the bushing.
12. Install round crystal ball (10) by slighting the iron wire attached to the ball through hole (M) and turn the remaining iron wire at least 3 times to ensure correct fixation.
13. Position candle sleeves (H) and wax sleeves (I) (12 times).
14. Install (12) bulbs (M).
15. Restore power to the fixture.

CARE INSTRUCTIONS:












1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.











ENVIRONMENT:

Special waste handling may be required.

Please contact your local authorities for more information.

ST HONORE ROUND CHANDELIER 32" ASSEMBLY INSTRUCTIONS

PARTS ENCLOSED			
ITEMS	DIAGRAM	DESCRIPTION	QTY
A		Junction Box (Not included) 80Lb. Min. Fixture rated	1
B		Ceiling Hook (Not included)	1
C		Mounting Screws (Not included)	1 Set
D1		round hook	1
E		canopy	1
D4		collar	1
D2		hang straight	1
D3		round hook	1
F		quick link	1
G		chain	1
F		quick link	1
H		Candle sleeve	5
I		Wax sleeve	5
K		Inner box foam	1
L		Body	1

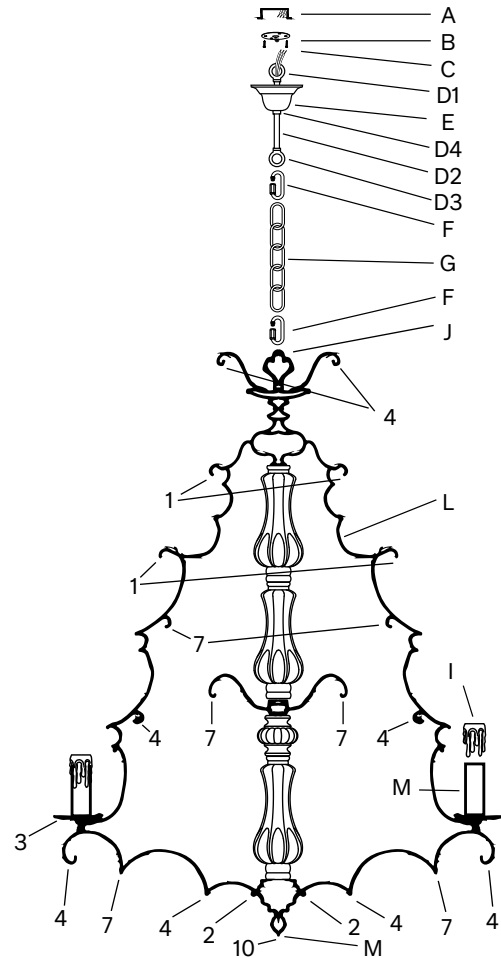



ST HONORE ROUND CHANDELIER 45" ASSEMBLY INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation.
2. This fixture has been rated for 24 x 40-watt maximum E12 standard bulb.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The ceiling must have at least the capacity of 5 times the weight of the ceiling light (157,6 LBS). For this light at least a ceiling capacity of 788 LBS is required.
5. The manufacturer and distributor accept no liability for incorrect installation.
6. For indoor use only.
7. Keep away from children

WARNINGS:

1. Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
4. Deviation from instructions may result in a risk of fire or electric shock.

TO ASSEMBLE :

1. Unscrew the top panel of the box (the 4 indicated screws) and remove the panel.
2. On the left outside panel of the box, unscrew the 3 indicated screws.
3. Remove the iron bar from the round hook (J)
4. Take out the inner box K).
5. Carefully remove all parts from the box and remove all plastic covering.
6. Turn OFF power to the junction box where the ceiling light will be installed.
7. Determine the height at which the fixture (L) is to be hung. If necessary, remove the quick link (F) from the end of the chain (G) and shorten the chain by removing the desired number of links using chain pliers. Reattach the quick link to the end of the chain.
8. Close the quick link F.
9. Weave the power cord through the links of the chain, and trim the power cord to the length of the chain plus 8 inches. Feed the outlet box conductors through the mounting plate (not included) and attach the mounting plate to the ceiling structure by using appropriate fasteners (not included).
10. Make appropriate electrical connections using wire nuts:
 - a) Connect the fixture's live wire (black) to the live outlet box wire.
 - b) Connect the fixture's neutral wire (white) to the neutral outlet box wire
 - c) Connect the fixture's ground wire (green or uncoated) to the ground outlet box wire.
11. Raise Canopy (E) to the mounting plate. Secure it by screwing collar (D4) onto the bushing.
12. Install round crystal ball (10) by slighting the iron wire attached to the ball through hole (M) and turn the remaining iron wire at least 3 times to ensure correct fixation.
13. Position candle sleeves (H) and wax sleeves (I) (18 times).
14. Position crystal fixture (18) X6 on the outside arms with dedicated holders.
15. Install (24) bulbs (M).
16. Restore power to the fixture.

CARE INSTRUCTIONS:












1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.


ENVIRONMENT:









Special waste handling may be required.

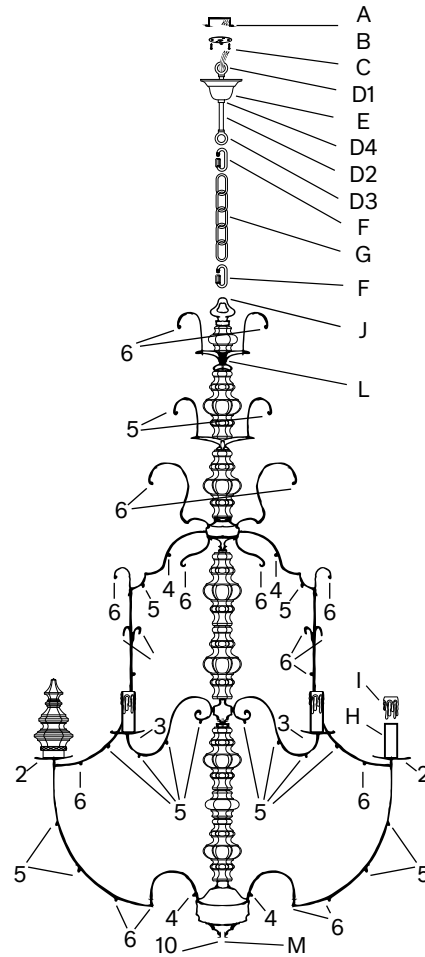Please contact your local authorities for more information.

ST HONORE ROUND CHANDELIER 45" ASSEMBLY INSTRUCTIONS

PARTS ENCLOSED				
ITEMS	DIAGRAM	DESCRIPTION	QTY	
A		Junction Box (Not included) 80Lb. Min. Fixture rated	1	
B		Ceiling Hook (Not included)	1	
C		Mounting Screws (Not included)	1 Set	
D1		round hook	1	
E		canopy	1	
D4		collar	1	
D2		hang straight	1	
D3		round hook	1	
F		quick link	1	
G		chain	1	
F		quick link	1	
H		Candle sleeve	5	
I		Wax sleeve	5	
K		Inner box foam	1	
L		Body	1	



2 20 mm x 1 PC  76 x 47 mm 12 + 2 PCS	4 20 mm x 1 PC  90 x 62 mm 72 + 2 PCS	6 24 mm x 1 PC  110 x 76 mm 94 + 2 PCS	7 22 mm x 1 PC  102 x 56 mm 74 + 2 PCS	10 50 mm x 1 PC  Ø 100 mm 1 PCS	15  90 x 98 mm 2 PCS	17  97 x 172 mm 6 PCS	18  172 x 83 mm 6 PCS
--	--	---	---	--	---	--	--