


## SELFOSS GRAND SCONCE

## PARTS ENCLOSED

- (A) Wire Nuts (3)
- (B) Side Screws (4)
- (C) Mounting Plate (1)
- (D) Mounting Screws (2)
- (E) Fixture Body (1)
- (F) Sockets (2)

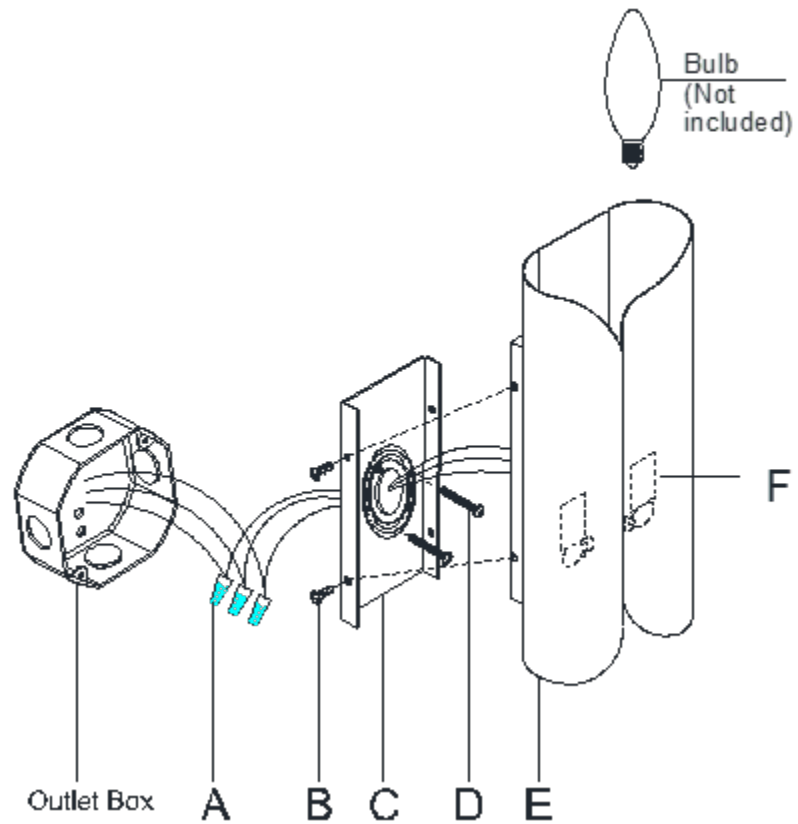

## SELFOSS GRAND SCONCE

## IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to two (2) 40-Watt maximum Type B bulbs (not included) or two (2) self-ballasted CFL bulb 9-Watt (not included). To avoid the risk of fire, do not exceed the recommended wattage.

## WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.**



**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

## ASSEMBLY &amp; INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic covering.
2. Remove the Mounting Plate (C) from the Fixture Body (E) by loosening the Side Screws (B).
3. Affix the Mounting Plate (C) onto the outlet box and secure with the Mounting Screws (D).
4. Connect the ground wire from the fixture (bare copper) with the ground wire from the outlet box. IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
5. Connect the hot wire (BLACK) from the fixture with the hot wire (usually black) from the outlet box. Fasten them together with a plastic Wire Nut (A) and wrap the connection with electrical tape.
6. Connect the neutral wire (WHITE) from the fixture with the neutral wire (usually white) from the outlet box. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
7. Attach the Fixture Body (E) to the Mounting Plate (C) and secure with Side Screw (B).
8. Insert Bulbs (not included) into the sockets.
9. Installation is complete. Turn on power at circuit breaker.

## CARE INSTRUCTIONS

Do not use polishes or cleaners on your lamp. Just wipe clean with a soft cloth.