


PARTS ENCLOSED

- (A) Junction Box, 22.7kg/50lbs. MIN. FIXTURE RATED (not included)
- (B) Mounting Screws (4 pcs; not included)
- (C) Wire Nuts (3)
- (D) Mounting Plate (1)
- (E) Wall Bracket (1)
- (F) Body (1)
- (G) Bolts (1)

PRODUCT DESCRIPTION

General material: Calcite & Iron
Height: 18in (45.5cm)
Width: 4.25in (10.7cm)
Length: 6.25in (16.0cm)
Weight: 33.06lbs (15kg)
Hardwired

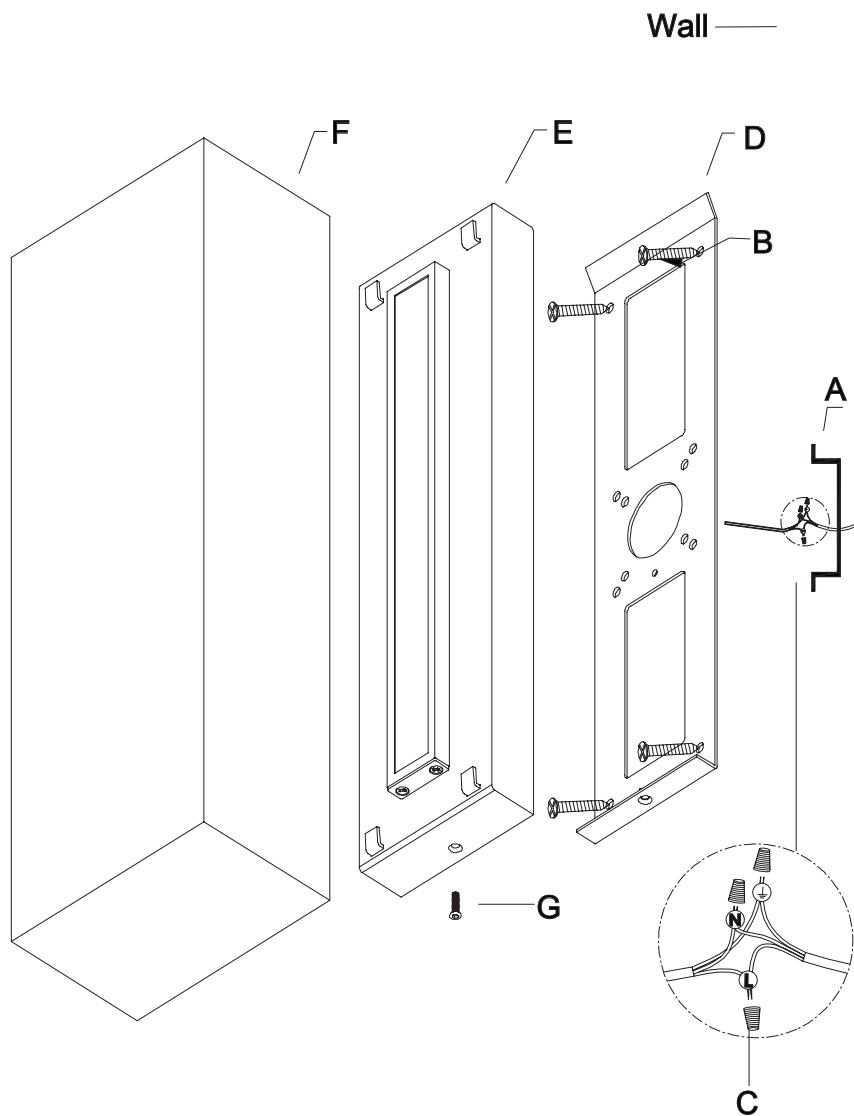

IMPORTANT PLEASE READ

PROFESSIONAL INSTALLATION REQUIRED IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation.
2. This fixture has been rated for 9-watt maximum LED module.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The wall must have at least the capacity of 5 times the weight of the sconce. For this sconce, at least a wall capacity of 165.34bs (75.0kg) is required.
5. The manufacturer and distributor accept no liability for incorrect installation.
6. For indoor use only.
7. Keep away from children.

WARNINGS:

1. Turn off electricity supply at main circuit panel before installing. Do not connect electricity supply until your light is fully assembled and installed.
2. All wires are connected. Do not remove the sconce from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing lightbulbs. Do not touch bulbs when fixture is turned on or look directly at lightbulbs. Keep flammable materials away from lightbulb.
4. Deviation from instructions may result in a risk of fire or electric shock.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

ASSEMBLY & INSTRUCTIONS:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to junction box where the wall light will be installed.
3. Loosen the bolt (G) and detach the wall bracket (E) from the mounting plate(D).
4. Have a professional contractor reinforce wall.
5. Attach the mounting plate (D) to the wall with mounting screws (B).
6. Connect the ground wire from the fixture to the ground junction box wire (usually the green or bare wire) with a plastic wire nut (C) and wrap the connection with electrical tape. Connect the hot wire to the junction box wire (usually black or smooth) with a plastic wire nut (C) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box (usually white or ribbed) with a plastic wire nut (C) and wrap the connection with electrical tape.
7. Attach the bracket(E) to the mounting plate (D) with bolts (G).
8. Hang the body (F) on the wall bracket (E).
9. Restore power to the junction box and test wall light fixture.

CARE INSTRUCTIONS:

1. Make sure that power is turned off and bulbs have cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.
3. The cable / cord of this ceiling light cannot be replaced; if the cable is damaged, do not use the light.

ENVIRONMENT:

Special waste handling may be required. Please contact your local authorities for more information.