


RH

ARC FLOOR LAMP

PARTS ENCLOSED:

- (A) Base (1)
- (B) Base Holes (2)
- (C) Wrench (1)
- (D) Plate (1)
- (E) Column (1)
- (F) Loader (1)
- (G) Washers (2)
- (H) Bolts (2)
- (I) Hole (1)
- (J) Screw (1)
- (K) Column (1)
- (L) Column (1)
- (M) Hole (1)
- (N) Screw (1)
- (O) Loop (1)
- (P) Shade Washer (1)
- (Q) Split Washer (1)
- (R) Shade (1)
- (S) Polarized Plug (1)
- (T) Protective Plastic (1)
- (U) Foot Switch (1)
- (V) 11W LED bulb (2)

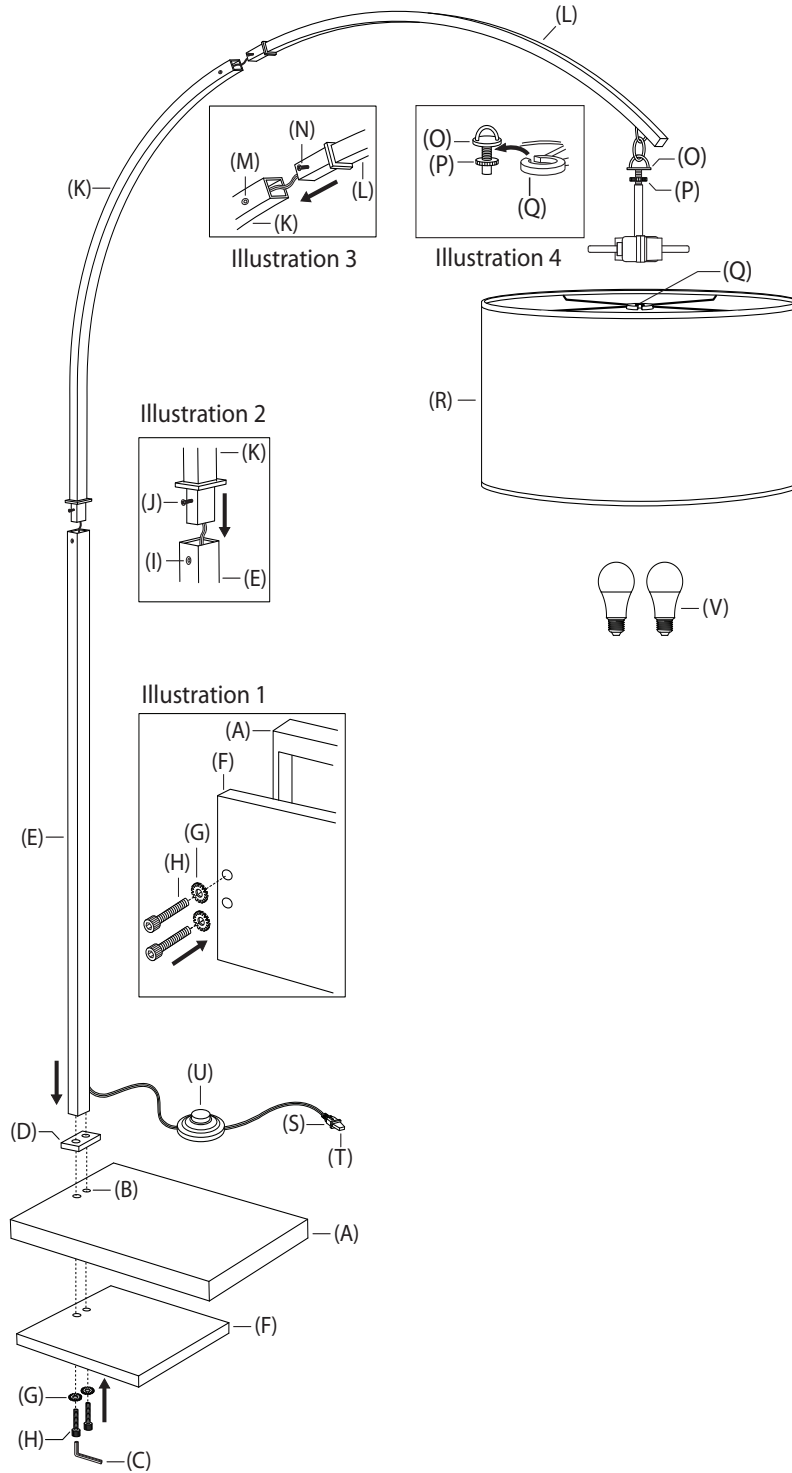

IMPORTANT PLEASE READ**WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.****SAFETY INSTRUCTIONS:**

These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.


This lamp is equipped with a polarized plug (one blade is wider than the other). If the plug does not fit securely into the outlet, do not force it - contact a professional electrician. Use the plug with an extension cord only if it can be fully inserted into the cord's socket. Never alter the plug in any way.

This fixture has been rated for up to two (2) 100-watt maximum Type A medium base bulbs or two (2) 11-watt LED medium base bulb (included). To avoid risk of fire, do not exceed the recommended wattage.


WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from the lit bulb.

This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning, or otherwise touching this light fixture.

 **WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.

 **WARNING: STRANGULATION HAZARD**
Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

ASSEMBLY & INSTALLATION:

****NOTE:** It is recommended that two people assemble the lamp per the following instructions to avoid injury or damage to the lamp.**

1. Remove all parts from carton. Remove protective plastic and discard.
2. Remove bolts (H), washers (G), and plate (D) from the bottom of column (E). Set all parts aside.
3. Place base (A) on top of loader (F). Place both items on a level surface. Place plate (D) on top of base (A).
4. Set column (E) on top of plate (D). Threaded holes in the bottom of column (E) should align with holes (B).
5. Hold column (E), plate (D), base (A) and loader (F) together. Carefully tilt parts to the side as shown in Illustration 1.
6. Slip washers (G) over bolts (H). Insert bolts (H) through holes in loader (F), base (A) and plate (D), as shown in Illustration 1. Bolts (H) will thread into the bottom of column (E). Use wrench (C) to tighten bolts (H).
7. Gently turn assembled base and column back into upright position. Make sure column (E) is securely attached to base (A). If column (E) seems loose, turn base over and tighten bolts (H) again.
8. Locate column (K) and remove screw (J) and set aside. Insert column (K) into column (E) as shown in Illustration 2. Insert screw (J) into hole (I) on column (E) to secure parts together. NOTE: The electrical cord on this lamp exits column (E) just above base (A). Pull the electrical cord exiting the column taut when inserting column (K) into column (E) to prevent damage to the wire.
9. Locate column (L) and remove screw (N) and set aside. Insert column (L) into column (K), as shown in Illustration 3. Insert screw (N) into hole (M) on column (K) to secure parts together. NOTE: The electrical cord on this lamp exits column (E) just above base (A). Pull the electrical cord exiting the column (E) taut when inserting column (L) into column (K) to prevent damage to the wire.
10. Lift shade (R) over socket cluster. Slide split washer (Q) between shade washer (P) and loop (O). Lift shade (R) so the top of shade washer (Q) is touching the bottom of loop (O). Secure position of shade (R) by turning shade washer (P) until it rests against the bottom of split washer (Q).
11. Install two (2) 11-watt maximum medium base LED bulbs (V) into sockets.
12. Remove protective plastic (T) from polarized plug (S). Insert polarized plug into electrical outlet.
13. Use on-off foot switch (U) to control power to the lamp.

CARE INSTRUCTIONS:

Wipe clean with a soft, dry cloth or static duster. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.