


### Parts Enclosed:

- (A) Mounting Plate (1)
- (B) Canopy (1)
- (C) Insulation
- (D) Shade (1)

### Hardware Included:

- (a) Plastic Wire Connector (2)
- (b) Green Ground Screw (1)
- (c) Mounting Screw (2)
- (d) Securing Screw (2)
- (e) Mounting Nut (2)
- (f) Shade Screw (3)
- (g) Bulb (2) (not included)

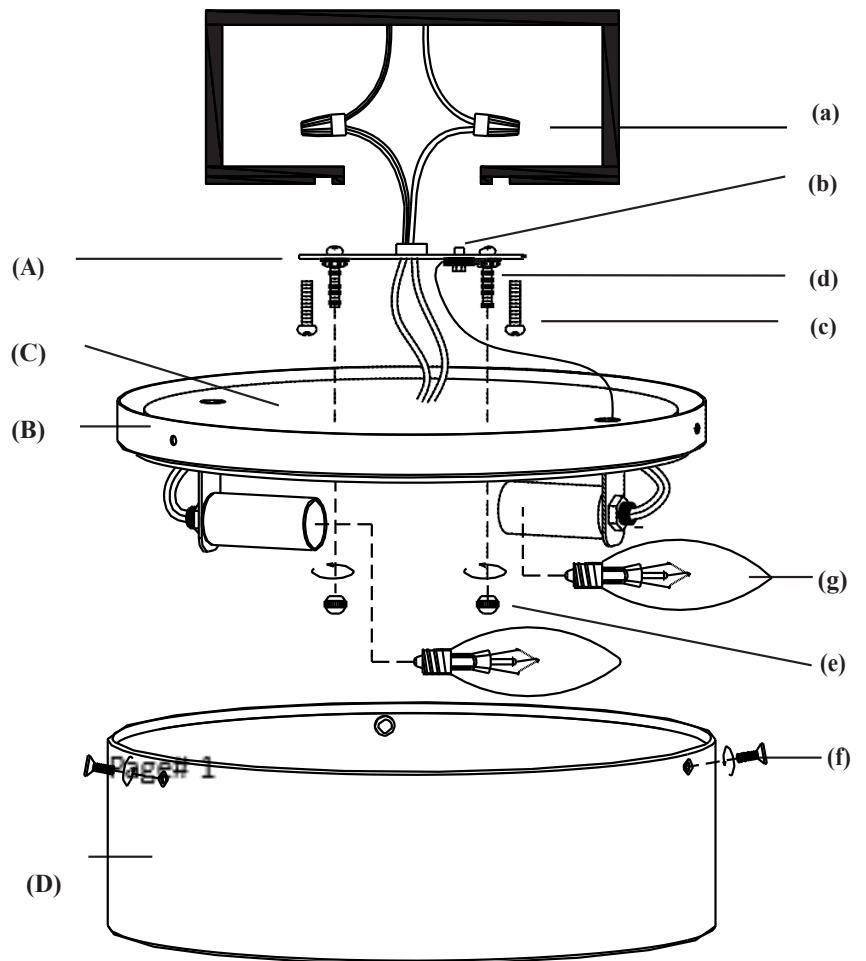

**IMPORTANT: PLEASE READ**

**WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.**

**SAFETY INSTRUCTIONS:**

This fixture must be mounted to the ceiling independent of an outlet box. Your ceiling may require modification to allow the mounting plate to be secured to a structural member. This fixture **MUST NOT** be secured using any type of hollow ceiling anchor, such as a toggle bolt.

This fixture has been rated for up to (2) 40-watt maximum TYPE B bulbs. To avoid the risk of fire, do not exceed the recommended wattage

**WARNINGS:**

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch the bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb. Wash hands after installing, handling, cleaning, or otherwise, touching this light fixture.

**THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.**

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 ft away from cribs, bassinets and toddler beds. Keep out of reach of children under 3.

**ASSEMBLY & INSTALLATION:**

- 1) Carefully remove all parts from the box and remove all plastic covering.
- 2) Turn OFF power to the junction box where the lamp will be installed.
- 3) Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green or bare wire). Or wrap the fixture's ground wire around green ground screw (b), and then fix the green ground screw into the mounting plate (A).
- 4) Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (a) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire connector (a) and wrap the connection with electrical tape.
- 5) Attach the mounting plate (A) to the outlet box using the mounting screws (c). Tighten with a screwdriver.
- 6) Attach the canopy (B) to the mounting plate (A). Insert the securing screw(d) fixed on the mounting plate(A) into the two holes on the canopy and then use mounting nut (e) to tighten it.
- 7) Insert the 40-watt Type B bulbs (not included) into threaded sockets.
- 8) Attach the shade (D) to the canopy (B) using shade screws (f).
- 9) Restore power to the junction box and test lamp fixture.
- 10) Installation is Complete.

**CARE INSTRUCTIONS:**

Wipe all surfaces with a soft dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.