

RESTORATION HARDWARE

PILLAR CANDLE RECTANGULAR 70 INCH CHANDELIER

PARTS ENCLOSED: **HARDWARE INCLUDED:**

(A) Mounting plate (1)	(a) Green ground screw (1)
(B) Back plate (1)	(b) Plastic wire connector (2)
(C) Base (1)	(c) Washer (2)
(D) Shade (30)	(d) Mounting screw (2)
(E) 44"Pipe (4)	(e) Strengthened screw (4)
(F) 21.75"Pipe (4)	(f) Pipe screw (24)
(G) 27"Pipe (4)	(g) anchor (4)
(H) 30.25"pipe (4)	(h) Tool (2)
(I) Bulb (30)	(i) plate screw (4)
	(j) lock (1)
	(k) Safety cable (1)

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.
This fixture has been rated for up to (30) 15-watt maximum TYPE B candelabra bulbs.
To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your lamp is fully assembled.

To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.


Do not touch bulb when fixture is turned on or look directly at lit bulb.
Keep flammable materials away from lit bulb.

This lighting fixture contains lead, a chemical know to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

MAXIMUM 15 WATT BULB TO BE USED WITH THIS PRODUCT. THE USE OF HIGHER WATTAGE COULD RESULT IN FIRE HAZARD.

TO ASSEMBLE:

- Carefully remove all parts from the box and remove all plastic covering.
- Turn OFF power to the junction box where the lamp will be installed.
- Locate the 21.75" Pipes(F), 27" Pipes(G), 30.25" Pipes(H) and 44" pipes(E) and check the actual suspension length conditions to the incremental fixture suspension length per number of extensions desired.
- Attach the ground wire from the fixture to the ground junction box wire from the outlet box (Usually green or bare wire) . Screw the green ground screw(a) into the mounting plate(A).
- Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector(b) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire connector(b) and wrap the connection with electrical tape.
- Attached the Safety cable (k) to the fixed fixture on the ceiling with the Lock (j).
- Attach the mounting plate(A) to the outlet box using the washer(c) and the mounting screws(d). Tighten with a screwdriver.
Fig.1: You would use anchor(g) fixed in the ceiling. And then, screw the strengthened screws(e) into the anchor of the ceiling. (attached the assembly instruction of anchor for you.)
- If need, disassemble the existing pipes by unscrewing the pipe screw(f) with the tool(h). Pull the wire back through the appropriate suspended pipe that will be need to be extended.
- Attach the back plate(B) to the mounting plate(A) using the plate screw(i) to fix it.
- Connect Back plate(B) with desired pipes which use pipes to hook the back plate's loops, and connect base(C) with pipes in the same way.
- Place 30 candle shades(D) (included) onto the sockets. The highest sockets match with the largest shades, middle sockets with middle shades, small and the smallest sockets with small and the smallest shades.
- Insert the bulbs (included) into threaded sockets.
- Restore power to the junction box and test lamp fixture.
- Installation is complete.

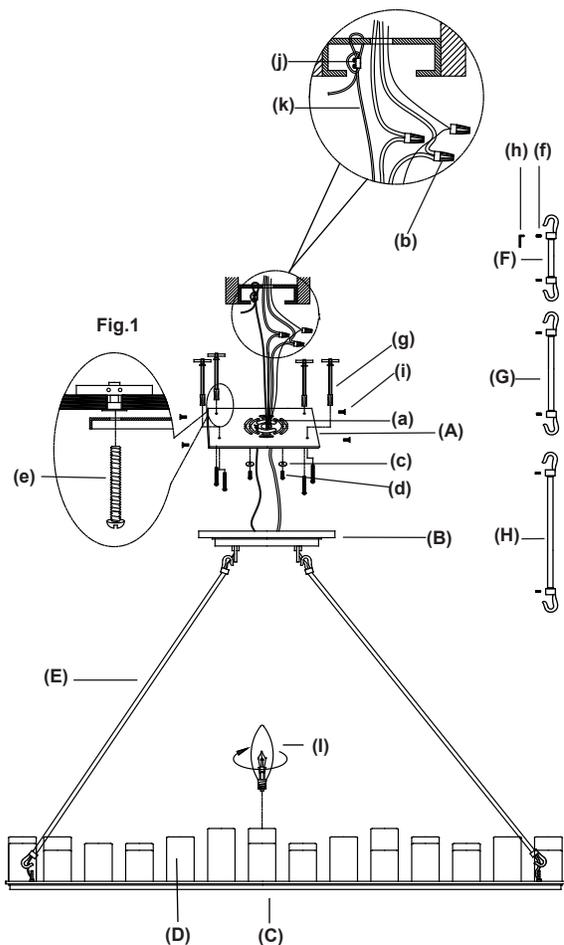

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.
JUST WIPE CLEAN WITH SOFT CLOTH.