












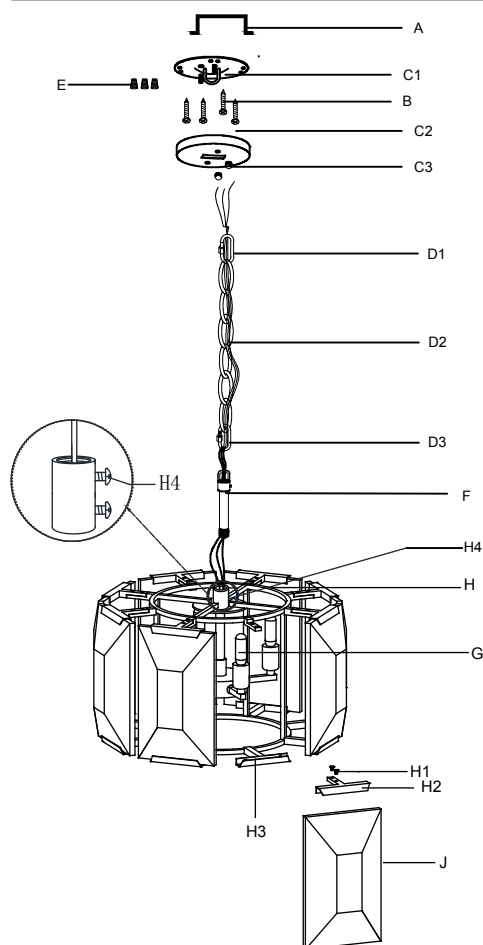


RESTORATION HARDWARE

HARLOW CRYSTAL CHANDELIER 19

PARTS ENCLOSED

ITEMS	DIAGRAM	DESCRIPTION	QTY.
(A)		Junction Box (Not included) 50LB. MIN. FIXTURE RATED	1
(B)		Mounting Screws (Not included)	4 Sets
(C1)		Ceiling Mounting Plate	
(C2)		Canopy	1
(C3)		Bolt Nut	
(D1)		Quick link	
(D2)		Chain	1
(D3)		Quick link	
(E)		Wire Nut	3
(F)		Collar	1
(G)		Bulb+Spares	4+1
(H)		Body	1
(J)		Glass Block	8



IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial-type applications of very heavy chandeliers.
2. The screws need to be screwed into a solid support structure inside the ceiling, which would require professional.
3. This fixture has been rated for 4 x 25-watt maximum E12 T6 bulb.
4. To avoid the risk of fire, do not exceed the recommended wattage.
5. The ceiling must have at least the capacity of 5 times the weight of the ceiling light. For this light at least a ceiling capacity of 141kg (310.85lb) is required.
6. The manufacturer and distributor accepts no liability for incorrect installation.
7. For indoor use only.
8. Keep away from children.

Warnings:

1. Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
4. Deviation from instructions may result in a risk of fire or electric shock.

PRODUCT DESCRIPTION:

General material: Glass & Iron
 Height: 41.0 cm (16.14in)
 Diameter: 48.0 cm (18.81in)
 Weight: 28.2 kg (62.17lb)
 Grounded / Hardwired

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the ceiling light will be installed.
3. **Loosen the bolts (H4), Then fasten collar (F) to chandelier body (H). Tighten the bolts (H4) on body(H).**
4. Loosen the bolts (H1) and remove the top slot (H2) from body (H). Put glass block (J) onto the bottom slot (H3) of the body. Put the top slot (H2) onto glass block (J) and re-attach top slot (H2) to body (H) with bolts (H1).
5. Unlock the quick link (D3) at the opposite end of the chain (D2) to attach the collar (F).
6. Loosen the Bolt Nut (C3) and remove the canopy (C2) from the ceiling mounting plate (C1).
7. Attach the ceiling mounting plate (C1) to the ceiling with mounting screws (B).
8. Insert quick link (D1) into canopy (C2). Unlock the quick link (D1) to attach ceiling mounting plate (C1).
9. Connect the ground wire from the fixture to the ground junction box wire (A) (Usually the green or bare wire) with a wire nut (E) and wrap the connection with electrical tape. Connect the hot wire to the hot junction box wire (A) (Usually black or smooth) with a plastic wire nut (E) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (A) (Usually white or ribbed) with a plastic wire nut (E) and wrap the connection with electrical tape.
10. Move the canopy (C2) up to the ceiling, then fasten the screw nut (C3).
11. Fasten lightbulbs (G) to the lampholders.
12. Restore power to the junction box and test ceiling light fixture.

CARE INSTRUCTIONS:

1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.
3. The cable/cord of this ceiling light cannot be replaced: If the cable is damaged, do not use the light.

ENVIRONMENT:

Special waste handling may be required. Please contact your local authorities for more information.