

# RH


## Lambeth Hexagonal Pull Installation Instructions

This pull includes hardware that is designed to mount securely to drawer fronts or cabinet doors that have a thickness range between  $\frac{1}{2}$  inch and  $\frac{1}{4}$  inches. If your drawer front or door is thicker or thinner than this range, please obtain the appropriate size screw from your local hardware store.

### PARTS INCLUDED

- 1 pc Drawer Pull
- 2 pcs 8-32, 1" Truss Head Machine Screw with Washer

1. Carefully determine a desired pull location and use a  $\frac{3}{16}$ "-diameter drill bit and an appropriate drill to make the holes through the drawer/door front.
2. Insert the appropriate length screw from the inside, with the washer against the back of the drawer front or door.
3. Attach the pull onto the protruding threads of the screw and use a screwdriver to tighten the screws while gently holding the pull.

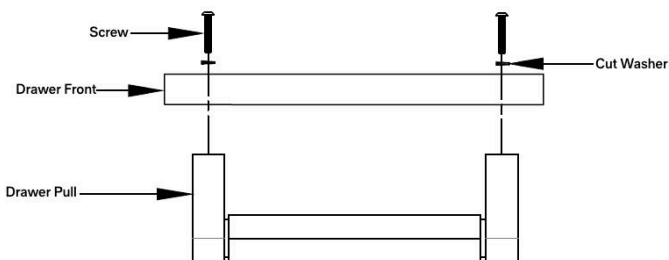

### CARE INSTRUCTIONS

Wipe with a soft, dry cloth. To protect the finish, do not use household cleaners or abrasives.