


RAVELLE PENDANT 10"

PARTS ENCLOSED

- (A) Mounting Strap (1)
- (B) Mounting Loop (1)
- (C) Mounting Screws (2)
- (D) 18" Connection Rods (2)
- (E) Canopy (1)
- (F) Canopy Ring (1)
- (G) 6" Connection Rods (2)
- (H) 12" Connection Rods (2)
- (I) Connectors (5)
- (J) Screws (4)
- (K) Plastic Washers (4)
- (L) Glass Ring (1)
- (M) Glass Cylinder (1)
- (N) Shade Holder (1)
- (O) Bulb (1)

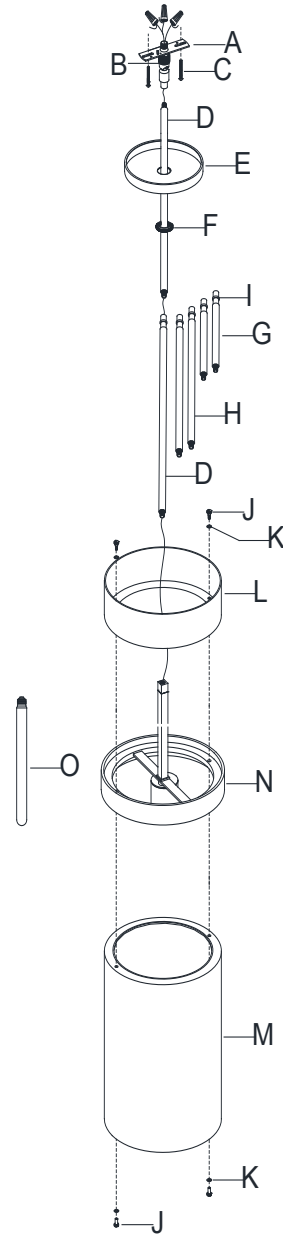

RAVELLE PENDANT 10"

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to one (1) 60-Watt maximum Type T light bulb (O) (included) or one (1) 13-Watt compact fluorescent light bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic covering.
2. Remove Screws (J) and Plastic Washers (K) from Shade Holder (N). Attach Glass Ring (L) to top of Shade Holder (N) and secure with Plastic Washers (K) and Screws (J).
3. Attach Glass Cylinder (M) to bottom of Shade Holder (N); secure with Plastic Washers (K) and Screws (J).

ASSEMBLY & INSTALLATION CONT.

4. Determine the hanging length of chandelier. Connect center rod on Shade Holder (N) to some or all Connection Rods (D) (G) (H) and Connectors (I) according to the height needed.
5. Feed wires through the Connection Rods (F) (G) (H), Connectors (I), and Mounting Loop (B).
6. Unscrew Canopy Ring (F) from Mounting Loop (B); slide Canopy Ring (F) and Canopy (E) onto the Connection Rod (D).
7. Screw Mounting Loop (B) onto the top nipple on Rod (D) by turning clockwise direction.
8. Attach Mounting Strap (A) to ceiling outlet box and secure with Mounting Screws (C).
9. Gently pull the wire from ceiling outlet box and allow the wire to hang. Thread the wire through the center hole of Mounting Loop (B).
10. Carefully inspect the chandelier's two fixture wires. One has very fine ridges molded into the plastic covering – this is the neutral wire. The second wire's covering is smooth – this is the hot wire. The bare wire is the ground wire.
11. Connect the ground wire from the fixture with the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the ground wire from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
12. Connect the neutral wire from your fixture with the neutral wire (usually white) from your ceiling box using a wire nut.
13. Connect the hot wire from your fixture with the hot wire (usually black) from your outlet box using a wire nut. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
14. Raise Canopy (E) to the affixed Mounting Strap (A) and secure with Canopy Ring (F).
15. Insert the Bulb (O) into the socket.
16. Restore power to outlet box and check operation of fixture.
17. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on your lamp. Just wipe clean with a soft cloth.