


## PARTS ENCLOSED:

- (A) CORD GRIP (not included)
- (B) CROSS BAR WITH GROUNDING SCREW
- (C) CEILING ROSE
- (D) RETAINING NUT
- (E) CEILING LOOP
- (F) HOOK (attached to Metal Chain)
- (G) METAL CHAIN
- (H) POWER CORD
- (I) GROUND WIRE
- (J) HOOK (attached to Metal Chain)
- (K) LOOP IN PENDANT
- (L) SCREWS (3)
- (M) PENDANT
- (N) WINDOW
- (O) KNOB

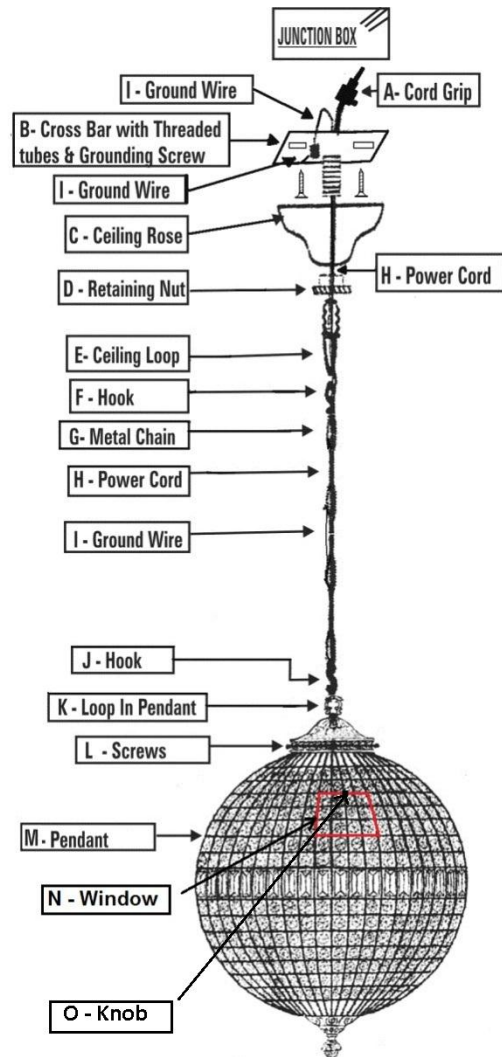

**IMPORTANT PLEASE READ****IMPORTANT SAFETY INSTRUCTIONS:**

These instructions are provided for your safety. It is very important that they are properly read completely before beginning the installation of your fixture.

**DIRECT WIRE FIXTURE.****WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.****WARNINGS:**

Turn off power before replacing the bulb. Make sure that the bulb had sufficient time to cool down. DO NOT subject the lamp to any shock while lit, as shattering of lamp may result.

**TO ASSEMBLE:**

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX / CIRCUIT BREAKER.
2. Remove all parts from carton. Do not throw away any parts.
3. Check if the grommets have been inserted in components **Cross Bar (B)** and **Ceiling Loop (E)**. If not, insert them yourself.
4. Unscrew the **Cross Bar (B)** from the **Ceiling Loop (E)**. Affix the **Cross Bar (B)** directly to the **Junction Box** using screws provided.
5. On the **Pendant (M)**, open the **Window (N)**, by unscrewing **Knob (O)**. Assemble six Type CA bulbs into the sockets of the **Pendant (M)**.
6. Open the wire coil. Lay the **Power Cord (H)** and the **Ground Wire (I)** from the **Pendant (M)** together and parallel to each other.
7. Attach the **Hook (J)** on one side of the chain to the **Pendant Loop (K)** in the **Pendant (M)**.
8. Weave the **Power Cord (H)** and the **Ground Wire (I)** wires through the **Metal Chain (G)**. Weave the wires through alternate links of the **Metal Chain (G)**.
9. Carefully lift the **Pendant (M)** with one end of the **Metal Chain (G)** attached to it and place it in an elevated position (e.g. on a step ladder) in such a way that the wire cords can freely reach the ceiling Junction Box.
10. Guide the wires coming out from the **Pendant (M)** and running woven through the **Metal Chain (G)** through the **Ceiling Loop (E)**, **Retaining Nut (D)** and the **Ceiling Rose (C)** in the order mentioned.
11. Further guide the wires through the **Threaded Tube** of the **Cross Bar (B)**.
12. Wire will be accessible through the **Cross Bar (B)**.
13. **MAKE PROPER ELECTRICAL CONNECTIONS. THIS INSTALLATION SHOULD BE DONE BY A QUALIFIED LICENSED ELECTRICIAN. FOLLOW INSTRUCTIONS FOR ELECTRICAL CONNECTION, AS PER MARKING ON THE CORD. CONNECT PHASE TO 'P' AND NEUTRAL TO 'N'.**
14. Connect the Grounding Wire (**silver un-laminated wire**) from the **Pendant (M)** to the **Grounding Bolt (painted Green Color)** attached to the **Cross Bar (B)**.

**TO ASSEMBLE CONT:**

15. Fasten wires together with a plastic Wire Connector (not provided) as follows:
  - a) Connect the Neutral Wire of the **Pendant (M)** to the Neutral Wire in the outlet box through the Wire Connector. Connect the Live Wire of the **Pendant (M)** to the Live Wire in the outlet box through the Wire Connector. Tightly wrap Wire Connector with the electrical insulation tape.
16. Slide the **Ceiling Rose (C)** and place it over the **Cross Bar (B)**. Screw the **Ceiling Loop (E)** along with the **Retaining Nut (D)** to the Threaded Pipe of **Cross Bar (B)**. Now screw the **Retaining Nut (D)** upwards so that the **Ceiling Rose (C)** is in contact with the ceiling.
17. Attach the **Hook (F)** of the **Metal Chain (G)** to the **Ceiling Loop (E)**.
18. Confirm the connection is sufficiently strong by manually testing the **Metal Chain (G)**.
19. Carefully lower the **Pendant (M)** along with the **Metal Chain (G)** until the **Metal Chain (G)** is taut. Straighten the **Metal Chain (G)** links.

**CARE INSTRUCTION:**

1. Wipe clean with a soft, dry cloth. Do not use any chemical or abrasive cleaners.