


MARIGNAN LINEAR CHANDELIER 48"

PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Mounting Loops (2)
- (C) Canopy (1)
- (D) Canopy Rings (2)
- (E) 18" Extension Rods (4)
- (F) 12" Extension Rods (4)
- (G) 6" Extension Rods (4)
- (H) Light Fixture (1)
- (I) Threaded Joints (2)
- (J) Open Crystal Links (272)
(+10 extra)
- (K) Closed Crystal Links (272)
(+10 extra)
- (M) Light Bulbs (10)

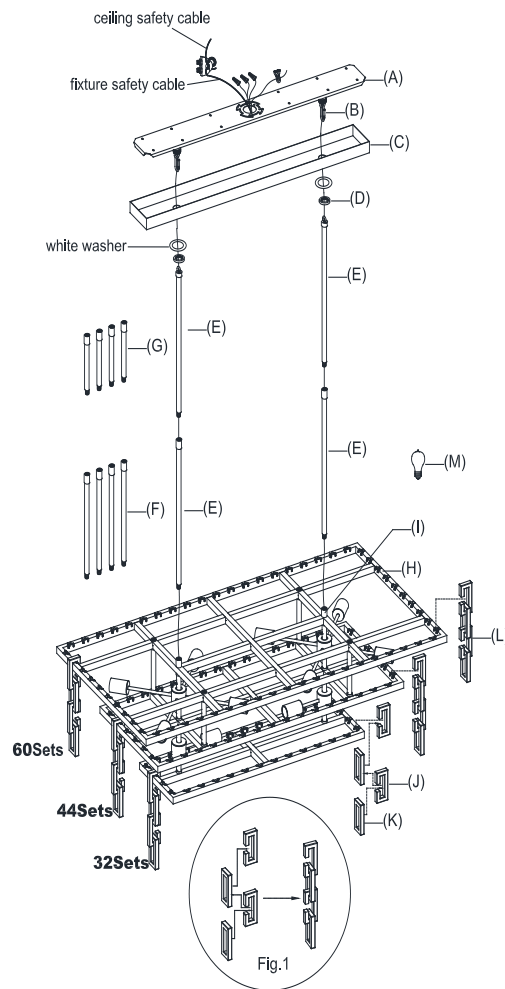

MARIGNAN LINEAR CHANDELIER 48"

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS REQUIRED.

This fixture must be mounted to the ceiling independent of an outlet box. Your ceiling may require modification to allow the mounting plate to be secured to a structural member. This fixture **MUST NOT** be secured using any type of hollow ceiling anchor, such as a toggle bolt.

This fixture has been rated for up to ten (10) 40-Watt maximum Type A standard light bulbs (included) or ten (10) 9-Watt compact fluorescent light bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad Extension may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic covering.
2. Determine the hanging length of pendant. Connect Threaded Joints (I) to some or all Extension Rods (E) (F) (G) according to the height needed.
3. Unscrew Canopy Rings (D); then slide Canopy Rings (D) and Canopy (C) on Extension Rods (E).

ASSEMBLY & INSTALLATION CONT.

4. Remove the white washers and then discard the white washers.
5. Feed wires through the Extension Rods; wires will exit from the back side of Canopy (C).
6. Attach Mounting Plate (A) to ceiling and secure with mounting screws (not included) and proper fasteners from your local hardware store.
7. Connect the safety steel wire from the fixture and the safety cable from ceiling. Refer to the illustration.
8. Hook hanging loop on Extension Rods (E) to Mounting Loops (B).
9. Carefully inspect the chandelier's two fixture wires. One has very fine ridges molded into the plastic covering – this is the **NEUTRAL WIRE**. The second wire's covering is smooth – this is the **HOT WIRE**. The bare wire is the **GROUND WIRE**.
10. Connect the **GROUND WIRE** from the fixture with the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the **GROUND WIRE** from the fixture to the green grounding screw inside of the outlet box. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
11. Connect the **NEUTRAL WIRE** from your fixture with the Neutral wire (usually white) from your ceiling box using a wire nut.
12. Connect the **HOT WIRE** from your fixture with the Hot wire (usually black) from your outlet box using a wire nut. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.**
13. Tuck the wire Extension neatly into the ceiling outlet box.
14. Attach Canopy (C) with light fixture to affixed Mounting Plate (A) and secure with Canopy Rings (D).
15. To prepare to hang the crystal links to the fixture body, connect two of the Closed Crystal Links (K) with two of the Opened Crystal Links (J). It is now called Crystal Links Kit (L); see Fig.1.
16. Connect 60 sets of Crystal Links Kit (L) for the top tier; hang the crystal links kit around the top tier.
17. Connect 44 sets of Crystal Links Kit (L) for the second tier; hang the crystal links kit around the second tier.
18. Connect 32 sets of Crystal Links Kit (L) for the third tier; hang the crystal links kit around the third tier.
19. Insert the recommended bulbs into sockets.
20. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on your lamp. Just wipe clean with a soft cloth.

MARIGNAN LINEAR CHANDELIER 48"

SAFETY CABLE ASSEMBLY

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.
2. Join fixture safety cable with safety cable from ceiling and wrap both safety cables around the cable lock nut.
3. Secure by tightening both hex nuts until tight.

