


## ALBANS GRAND SCONCE

### PARTS ENCLOSED

- (A) Wire Nuts (3)
- (B) Mounting Plate (1)
- (C) Mounting Screws (2)
- (D) Side Screws (3)
- (E) Fixture Base (1)
- (F) Shade (1)
- (G) Socket Ring (1)
- (H) Bulb (1)
- (I) Metal Plate (1)
- (J) Screw (1)
- (K) Metal Anchor (1)

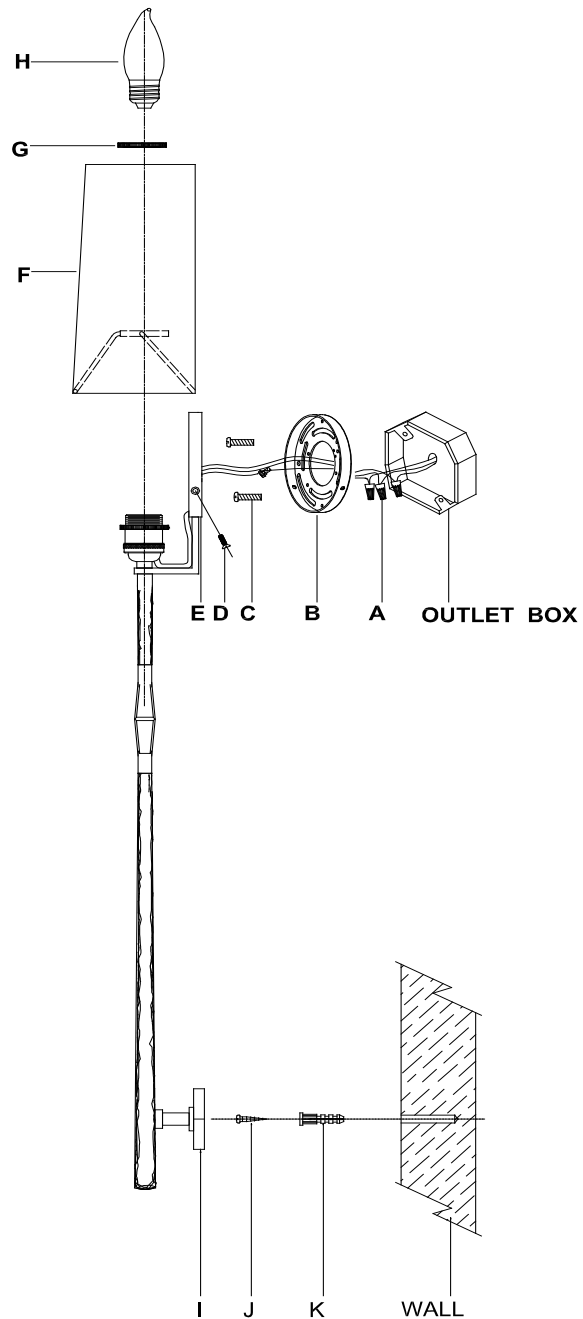

**IMPORTANT SAFETY INSTRUCTIONS**

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to one (1) 40-Watt maximum Type C standard incandescent lightbulb (not included), one (1) 9-Watt compact fluorescent lightbulb (not included), one (1) 5-Watt LED lightbulb (not included), or one (1) 4.5-Watt LED lightbulb (included).

To avoid the risk of fire, do not exceed the recommended wattage.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.**



**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

**ASSEMBLY & INSTALLATION**

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all pastic coverings.
2. Remove Mounting Plate (B) from Fixture Base (E) by loosening Side Screws (D).
3. Affix Mounting Plate (B) onto the wall outlet box and secure with Mounting Screws (C).
4. With the fixture dimension as a guide, drill a hole on the wall.
5. Knock Metal Anchor (L) into the wall hole, then secure Screw (K) into Metal Anchor (L).
6. Connect the hot wire (black) from the fixture to the hot wire from the outlet box (usually black). Fasten them together with a Wire Nut (A) and wrap the connection with electrical tape.
7. Connect the neutral wire (white) from the fixture to the neutral wire from the outlet box (usually white). **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
8. Connect the ground wire (bare copper) from the fixture to the ground wire from the outlet box (usually green or copper in color). **IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.**
9. Attach Fixture (E) to Mounting Plate (B), then secure with Side Screws (D). Make sure the hole on Metal Plate (J) will attach to Screw (K).
10. Attach Shade (F) to the socket and secure with Socket Ring (G).
11. Insert Bulb (H) into the socket.
12. Installation is complete. Turn on power at fuse or circuit breaker.

**CARE INSTRUCTIONS**

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.