


19TH C. ENGLISH OPENWORK 2-TIER ROUND CHANDELIER 50"

PARTS ENCLOSED

- (A) Wire Nuts (3)
- (B) Threaded Nipple (1)
- (C) Ceiling Loop (1)
- (D) Canopy (1)
- (E) Lock Collar (1)
- (F) Chain (1)
- (G) Carabiners (2)
- (H) Top Ring (1)
- (I) Stems (4)
- (J) Bulbs (20)
- (K) Hanging Rings (4)

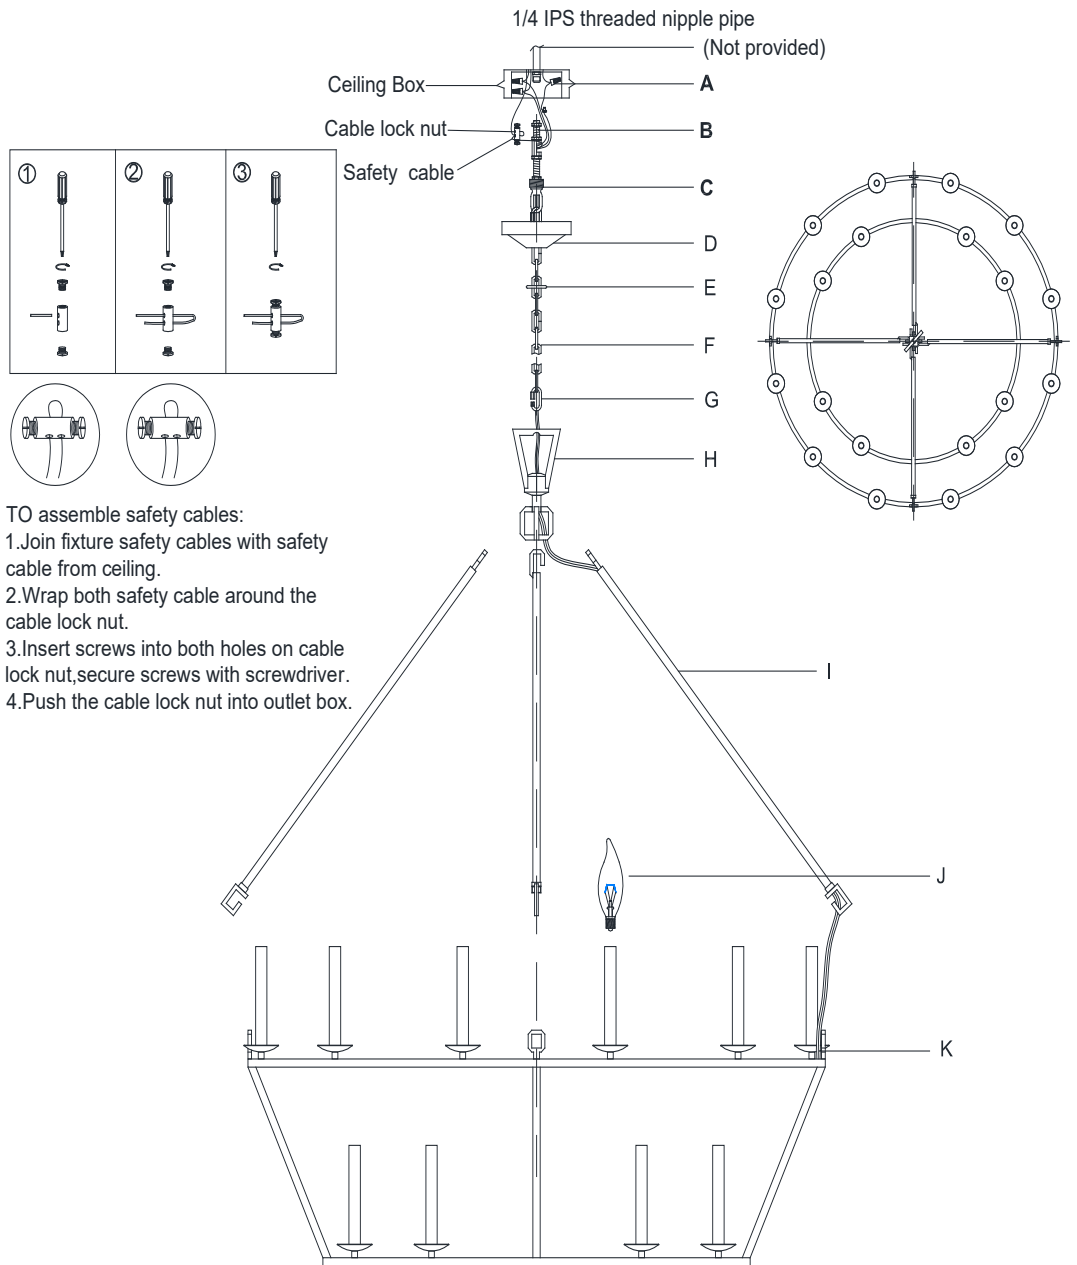

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture must be mounted to the ceiling independent of an outlet box. Your ceiling may require modification to allow the mounting plate to be secured to a structural member.

This fixture has been rated for up to twenty (20) 25-Watt E12 Type CA candelabra lightbulbs (not included), twenty (20) 9-Watt compact fluorescent lightbulbs (not included) or twenty (20) 3-Watt LED lightbulbs (not included). 40-Watt E12 Type B candelabra lightbulbs are included. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Attach one end of each Stems (I) to Hanging Ring (K) on the fixture body and other end to the Top Ring (H).

ASSEMBLY & INSTALLATION CONT.

3. A 1/4" threaded nipple pipe must be installed in your outlet box. Then install the Threaded Nipple (B) into the outlet box.
4. Unscrew the threaded collar on the Carabiner (G) and attach it to the Top Ring (H). Close the threaded collar to secure the fixture.
5. Let Canopy (D) and Lock Collar (E) go through the Chain (F).
6. With the fixture dimension as a guide, shorten the Chain (F) as needed using a pair of chain pliers.
7. Unscrew the threaded collar on the other Carabiner (G). Raise the fixture and attach Carabiner (G) to the Ceiling Loop (C). Close the threaded collar to secure.
8. Unwrap the wiring from the top of the fixture body. Weave the power supply cord and the ground wire through the Chain (F).
9. When you reach the Canopy (D) and Ceiling Loop (C), measure the wires then cut. Be certain to leave enough to connect inside of the outlet box.
10. Strip the insulation back on the two power supply wires about 5/8".
11. Twist the power supply and ground wires together and push through the center hole of the Ceiling Loop (C).
12. Join the fixture safety cable with safety cable from ceiling.
13. Wrap both safety cables around the cable lock nut.
14. Insert screws into both holes on the cable lock nut and secure screws with screwdriver.
15. Push the cable lock nut into the ceiling box.
16. Connect the fixture ground (bare) wire with the ground wire from the outlet box using Wire Nut (A). If your house does not have a ground wire, then attach this wire to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
17. Connect the fixture neutral (ribbed, no markings) wire with the neutral wire from the outlet box using Wire Nut (A).
18. Connect the fixture hot (smooth edge markings) wire with the hot wire from the outlet box using Wire Nut (A). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
19. Tuck these wire connections neatly into the outlet box to secure.
20. Attach Canopy (D) to Ceiling Loop (C) and secure with Lock Collar (E).
21. Insert Bulbs (J) into the sockets.
22. Installation is complete. Turn on power at fuse or circuit breaker.

CARE INSTRUCTIONS