
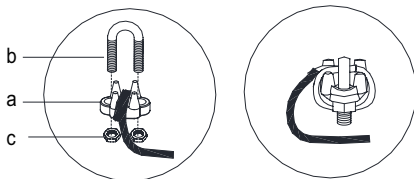


# RH

## DEVAUX GRAND SQUARE SCNCE

### PARTS ENCLOSED

- (A) Metal Anchors (20)
- (B) Wood Screws (20)
- (C) Mounting Plate (1)
- (D) Mounting Screws (2)
- (E) Base Screws (4)
- (F) Fixture Base (1)
- (G) Frame (1)
- (H) Glass Shade (1)
- (I) Allen Wrench (1)
- (J) Glass Panels (4)
- (K) Cap (1)
- (L) Set Screws (2)
- (M) Metal Tabs (4)
- (N) Bulb (1)
- (O) Screws (8)

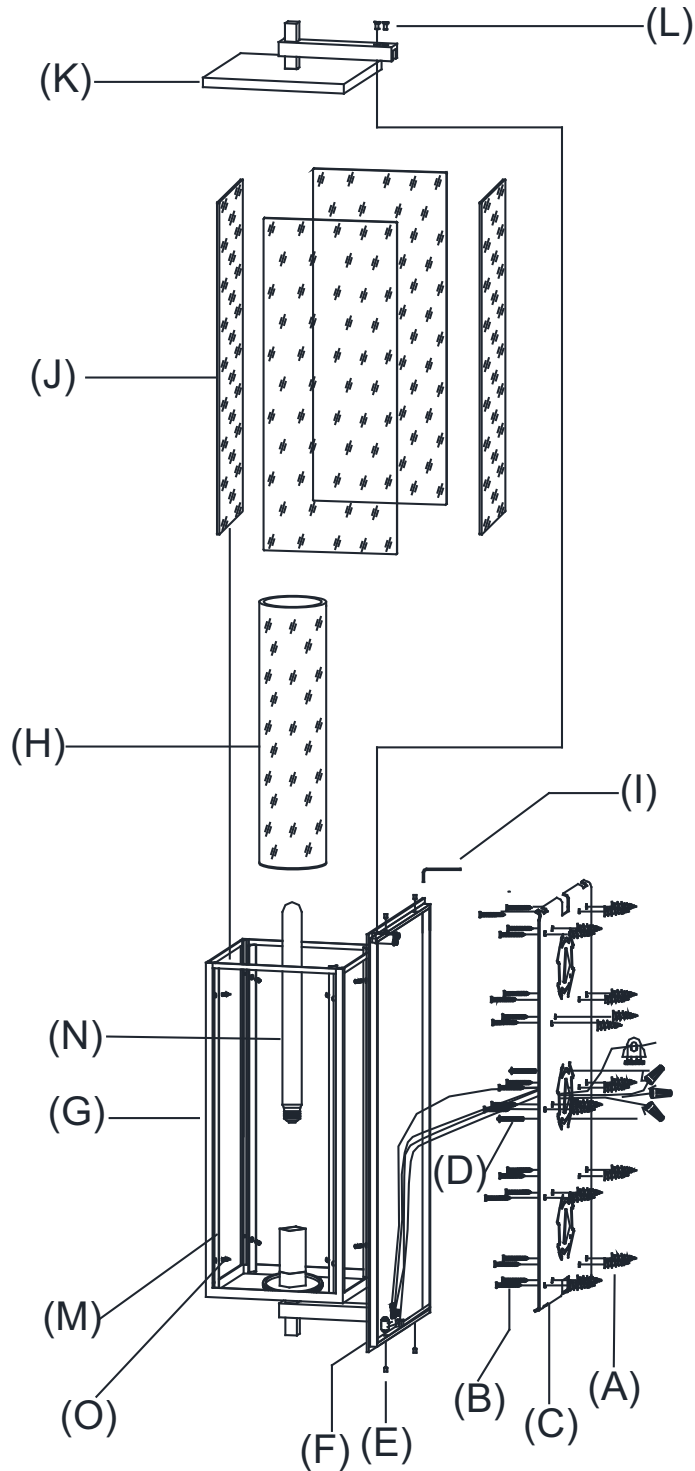

#### Install safety cable:

1. Wrap the safety cable into the slot hole on the mounting plate.
2. Wrap the safety cable around the saddle (a).
3. Insert U-bolt clip (b) into the saddle (a) and secure with the nuts (c).

## IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for one (1) 40-Watt maximum Type T lightbulb (included) or one (1) 9-Watt compact fluorescent lightbulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

## OUTDOOR INSTALLATION

The fixture must be mounted 4 feet from ground. Use silicone caulk to seal the fixture where the mounting plate meets the surface to prevent water from seeping in.

## WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

## ASSEMBLY &amp; INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Remove Mounting Plate (C) from Fixture Base (F) by removing Base Screws (E) using Allen Wrench (I).
3. To determine the mounting height of the sconce, select one set of three universal mounting slots to install.
4. Place Mounting Plate (C) with the selected mounting slots to the wall outlet box and mark locations for 20 mounting holes

## ASSEMBLY &amp; INSTALLATION CONT.

- with a pencil. Remove Mounting Plate (C).
5. Drill small holes on each pencil mark on the wall; each hole should be big enough to accommodate Metal Anchors (A). Push Metal Anchors (A) into the holes on the wall.
6. Affix Mounting Plate (C) to the wall outlet box by aligning the holes and secure by inserting Wood Screws (B) into Metal Anchors (A) and Mounting Screws (D) to the wall outlet box.
7. Remove Cap (K) from top of Frame (G) by removing Set Screws (L).
8. Remove Metal Tabs (M) by loosening Screws (O). Install Glass Panels (J) onto Frame (G) and secure in place with Metal Tabs (M) and Screws (O).
9. Insert Bulb (N) into the socket.
10. Screw Glass Shade (H) onto the shade holder in the center of Frame (G).
11. Replace Cap (K) to the top of Frame (G) and secure with Set Screws (L).
12. Gently pull the wire from the wall outlet box and allow the wire to hang. Thread the wire through the center hole of Mounting Plate (C).
13. Connect the safety steel wire from the fixture and the safety cable from the wall. (See illustration on previous page).
14. Attach the fixture ground wire and house ground wire (usually green insulation or bare wire) to the wall outlet box with the green grounding screw. Connect fixture to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
15. Connect the neutral wire (white wire) to the neutral outlet wire (usually white insulation) with a plastic wire connector and wrap the connection with electrical tape.
16. Connect the hot wire (black wire) to the hot outlet box wire (usually black insulation) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
17. Attach Fixture Base (F) to the affixed Mounting Plate (C) and secure with Base Screws (E). Tighten using Allen Wrench (I).
18. Restore power to outlet box and check operation of fixture.
19. Assembly is complete.

## CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.