


# RESTORATION HARDWARE


## 20TH C. FACTORY FILAMENT PENDANT

### PARTS ENCLOSED

- (A) Threaded rods (2)
- (B) Mounting plate (1)
- (C) Mounting screws (2)
- (D) Mounting canopy (1)
- (E) Cap nuts (2)
- (F) Shade holder (1)
- (G) Thumbscrews (3)
- (H) Socket collar (1)
- (J) Light bulb (1)

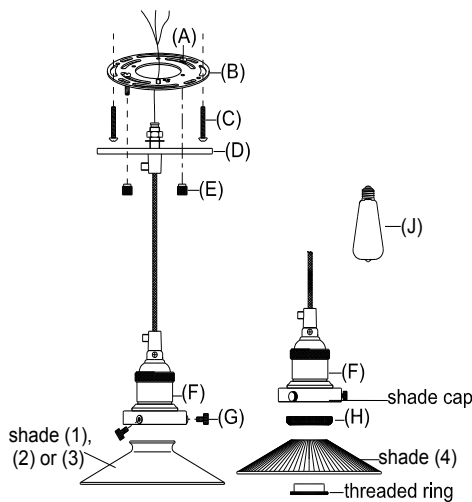

- Shade Option ( I ):      Shade Option ( II ):  
(1) Metal shade            (4) Ribbed glass shade  
(2) Mirror reflector shade  
(3) White glass shade



### IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to one (1) 40-watt maximum Type A bulb (J) (included) OR 13W Compact Fluorescent bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

### WARNINGS:

1. All wires are connected. When unpacking, be careful not to pull with wires as a bad connection may result.
2. Do not connect electricity until your fixture is fully assembled.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug fixture and allow it to cool prior to replacing light bulb.
4. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.
5. Keep flammable materials away from lit bulb.
6. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

**IMPORTANT: For a safe and secure installation, please ensure that the electrical box to which this fixture will be mounted is properly attached to a structural member of the building.**

### TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the chandelier will be installed.
3. Remove mounting plate (B) from mounting canopy (D) by loosen cap nuts (E).
4. Attach mounting plate (B) to mounting outlet box with mounting screws (C).
5. Attach the fixture ground wire and house ground wire (usually green) to ceiling outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
6. Connect the neutral wire (white) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
7. Connect the hot wire (black) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
8. Tuck these wire connections neatly into the ceiling outlet box.
9. Attach mounting canopy (D) to mounting plate (B), letting the threaded rods (A) of mounting plate (B) pass through the holes of mounting canopy (D), and tighten by replace cap nuts (E).
10. **You can install without any shade like Fig. 1.**
11. **SHADE ASSEMBLY:** (All shades are not included)  
Shade Option (□): When you using the shade (1), (2) or (3), loosen thumbscrews (G) from shade holder (F), place metal shade (1), (2) or (3) to shade holder (F) and secure with thumbscrews (G).  
Shade Option (□): If you want to use the shade (4), remove threaded collar (H), place shade cap and shade (4) to shade holder (F) and secure with threaded ring provide. (Keep the threaded collar (H) in case of changing back to Option (□) to use the other shades).
12. Insert the recommended bulb into the socket.
13. Restore power to the junction box and test the pendant fixture.

### CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.