


19TH C. ENGLISH OPENWORK 2-TIER CHANDELIER 62"

PARTS ENCLOSED

- (A) Wire Nuts (3)
- (B) Threaded Nipple Pipe (1)
- (C) Ceiling Loop (1)
- (D) Canopy (1)
- (E) Lock Collar (1)
- (F) Chain (1)
- (G) Carabiners (2)
- (H) Top Ring (1)
- (I) Stems (4)
- (J) Bulbs (24)
- (K) Hanging Rings (4)
- (L) Safety Cable (1)
- (M) Cable Lock Nut (1)

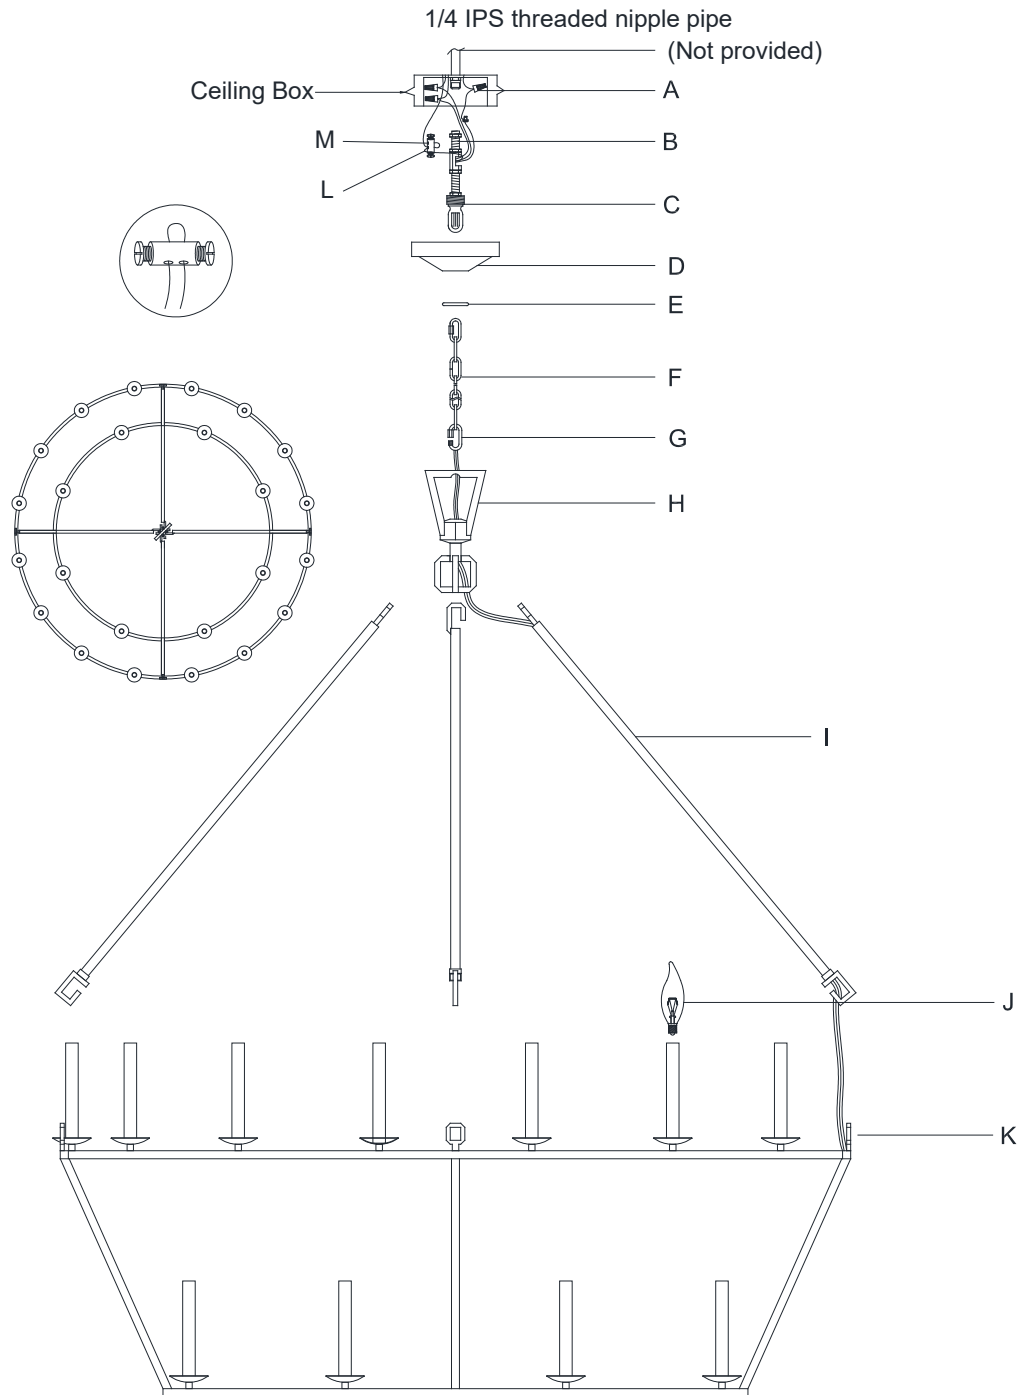

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to twenty-four (24) 25-Watt E12 Type CA candelabra lightbulbs (included), twenty-four (24) 9-Watt compact fluorescent lightbulbs (not included), or twenty-four (24) 3-Watt LED lightbulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Attach one end of Stems (I) to Hanging Ring (K) on the fixture body and other end to Top Ring (H). SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL..
3. A 1/4" threaded nipple must be installed into your ceiling outlet box, then install Threaded Nipple Pipe (B) into the ceiling outlet box.

ASSEMBLY & INSTALLATION CONT.

4. Unscrew the threaded collar one of Carabiners (G) and attach it to Top Ring (H). Close the threaded collar to secure the fixture body.
5. Let Canopy (D) and Lock Collar (E) go through Chain (F).
6. With the fixture dimension as a guide, shorten Chain (F) as needed using a pair of chain pliers.
7. Unscrew the threaded collar on the other Carabiners (G), raise the fixture body, and attach Carabiners (G) to Ceiling Loop (C). Close the threaded collar to secure.
8. Unwrap the wire from the top of the fixture body. Weave the power supply cord and the ground wire through Chain (F).
9. When you reach Canopy (D) and Ceiling Loop (C), measure the wire and cut. Be certain to leave enough to connect inside of the outlet box.
10. Strip the insulation back on the two power supply wires about 5/8".
11. Twist the power supply and ground wires together and push through the center hole of Ceiling Loop (C).
12. Join the fixture Safety Cable (L) with the safety cable from the ceiling.
13. Wrap both safety cables around Cable Lock Nut (M).
14. Insert the screws into both holes on Cable Lock Nut (M) and secure screws with a screwdriver.
15. Push Cable Lock Nut (M) into the ceiling outlet box.
16. Connect the fixture ground wire (bare) with the ground wire from the ceiling outlet box using a Wire Nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
17. Connect the fixture neutral wire (ribbed, no markings) with the neutral wire from the outlet box using a Wire Nut (A).
18. Connect the fixture hot wire (smooth edge, markings) with the hot wire from the ceiling outlet box using a Wire Nut (A). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
19. Tuck these wire connections neatly into the ceiling outlet box to secure.
20. Affix Canopy (D) to Ceiling Loop (C), and secure with Lock Collar (E).
21. Insert Bulbs (J) into each of the sockets.
22. Installation is complete. Turn on power at fuse or circuit breaker.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.