


## SPECIFICATIONS

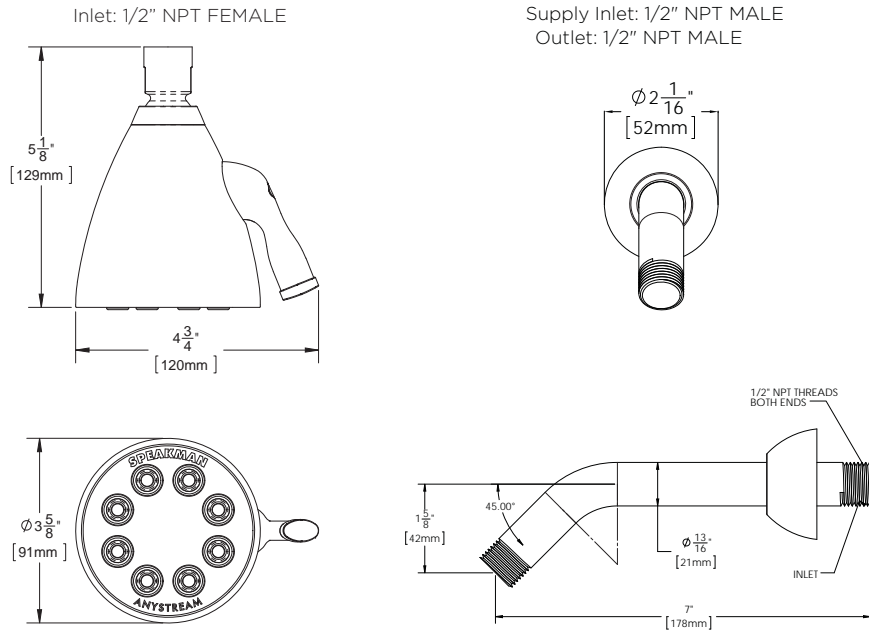

## FEATURES AND BENEFITS

- Solid, non-corrosive, drop-forged brass
- Extra-thick, high-micron plating ensures a long-lasting finish
- Contoured spray adjusting side handle for precise control
- Stream adjustability with 64 spray stream options
- 16" Full body spray pattern
- Self-cleaning lexan deposit-resisting spray jets
- Includes showerhead, arm and flange
- Flow control valve and diverter sold separately
- Meets plumbing codes ASME/ANSI A112.18.1, CSA International B125, and IAPMO/UPC
- Low flow showerhead contains patented plungers to produce powerful spray performance and is WaterSense certified (2.0 GPM)

## CARE AND CLEANING

The lustrous finish on your Restoration Hardware Bathware fixture should be treated with care. Improper handling or cleaning can damage the surface of any metal finish. Use a soft cloth to wipe clean. Avoid harsh abrasive cleaner. Water contains lime and other mineral deposits that will be left on the surface after the water has evaporated. You can prevent these deposits from forming by always wiping the fixture dry immediately after use.


## TECHNICAL SUPPORT AND CUSTOMER SERVICE

For technical support in the installation of your Restoration Hardware Bathware fixture, please call 1-800-537-2107 weekdays between the hours of 7:00am and 4:00pm PST. For other questions regarding your order, to order additional components of the Restoration Hardware Bathware Collection, to order replacement parts, or to address warranty issues, please contact Restoration Hardware Customer Service at 1-877-747-4671.

# RH

RESTORATION HARDWARE

## INSTALLATION INSTRUCTIONS

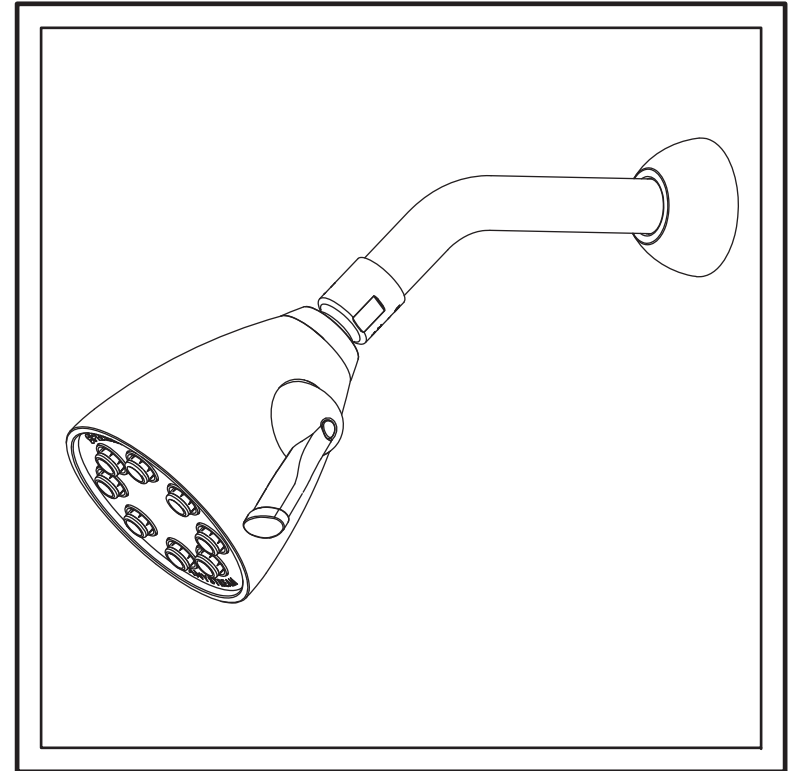

### **SPEAKMAN®**

### ICON 8 JET SHOWERHEAD

MODELS:

- 2360-006 (POLISHED CHROME FINISH)
- 2360-0007 (BRUSHED NICKEL FINISH)
- 2360-0008 (POLISHED NICKEL FINISH)
- 2360-0022 (OIL RUBBED BRONZE FINISH)

92-2963-R2

## TOOLS AND SUPPLIES

Thread Seal Tape  
(included)




Adjustable Wrench




## INSTALLATION:


- 1** Place the Escutcheon Plate (1) on a flat surface. Push the long end of the Shower Arm (2) down into the plate. This will help the teeth of the plate slide over the arm easier.




- 2** Once the Escutcheon Plate (1) is on the shower arm, slide the plate over the Shower Arm (2).




- 3** Apply Teflon Tape to inlet side of Shower Arm (2). Thread Shower Arm (2) into Female Pipe Fitting within the wall. Firmly tighten, and make sure Shower Arm (2) Outlet is pointing in a downward position.

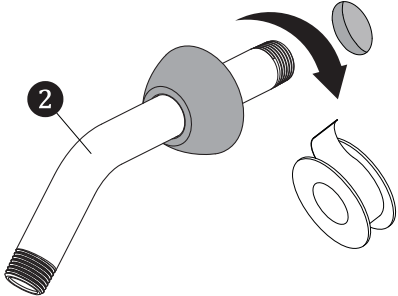


- 4** Position Escutcheon Plate (1) flat against wall.

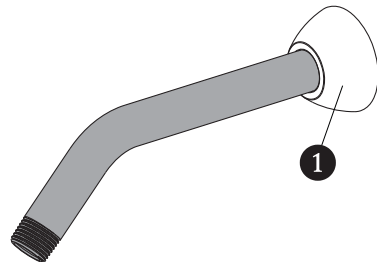

- 5** Apply Teflon Tape to the outlet side of shower arm in a clockwise direction.

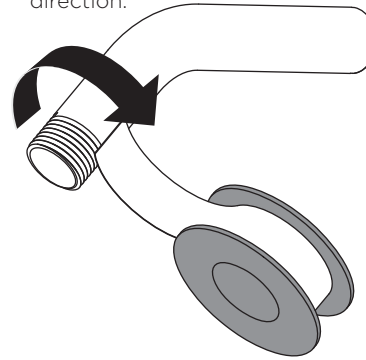

- 6** Thread Showerhead onto shower arm by turning it in a clockwise direction. Tighten with adjustable wrench. Turn water supply on and check for leaks.

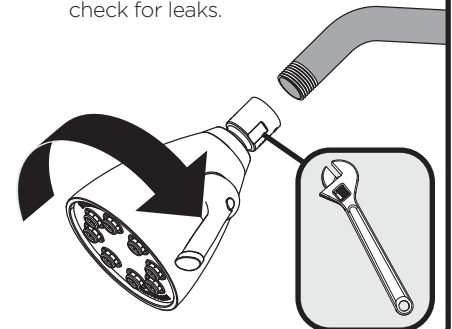

- 7** Adjust spray pattern by rotating side handle to preferred Anystream® position.

