


RH

MODERN FILAMENT PENDANT

PARTS ENCLOSED

- (A) Wire Nuts (3)
- (B) Mounting Plate (1)
- (C) Mounting Screws (2)
- (D) Canopy (1)
- (E) Canopy Screws (4)
- (F) Loop (1)
- (G) Quick Link (1)
- (H) Loop (1)
- (I) Extensions (4)
- (J) Threaded Nipple (1)
- (K) Shade Screws (4)
- (L) Shade Frame (1)
- (M) Shade Housing (1)

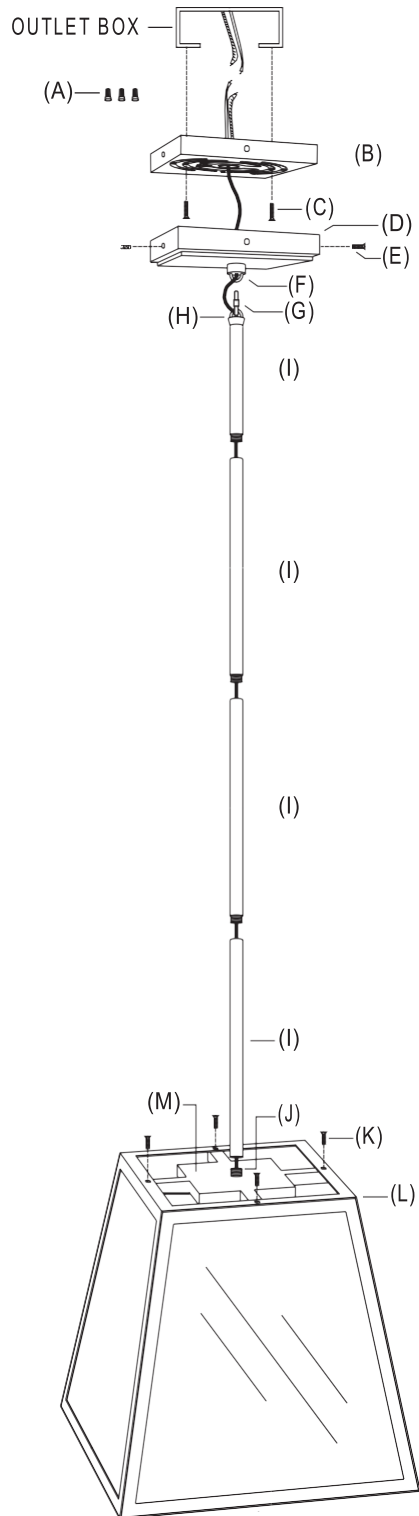



MODERN FILAMENT PENDANT

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.


This fixture has been rated for up to one (1) 100-watt maximum Type A medium base filament bulb or one (1) 11-watt LED medium base bulb. To avoid risk of fire, do not exceed the recommended wattage.

If any special control devices are used with this fixture, follow the instructions carefully to assure full compliance with N.E.C. requirements. If there are any questions, contact a qualified electrical contractor.


WARNINGS

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from the lit bulb.

This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning, or otherwise touching this light fixture.

 **WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

 **WARNING: STRANGULATION HAZARD**
Keep cord at least 3 ft. away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

CARE INSTRUCTIONS

Wipe clean with a soft, dry cloth or static duster. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.

ASSEMBLY & INSTALLATION

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY AT FUSE BOX/ CIRCUIT BREAKER.
2. Remove all parts from carton. Do not throw away any parts.
3. Place shade frame (L) on a level surface. Using a screwdriver (not included), remove shade screws (K) and set aside. Remove shade frame (L) from shade housing (M), and set aside. Shade frame (L) will be reattached at the end of fixture assembly.
4. Remove mounting plate (B) from canopy (D) by removing canopy screws (E). Set canopy screws (E) aside.
5. Affix mounting plate (B) to ceiling outlet box with mounting plate screws (C) provided.
6. Measure desired drop for fixture to hang and add/remove extension tubes (I) as needed. Guide wiring through extension tubes before threading tubes together. ****TO ADD/REMOVE EXTENSIONS: (Un)Thread the threaded nipple of one extension into the threaded opening of the next extension. Make sure wiring is pulled tight when threading extensions together to prevent damage to the wire.****
7. Connect loop (F) and loop (H) using quick link (G).
8. Thread bottom extension tube (I) onto the threaded nipple (J).
9. Guide wiring from top extension (I) through loop (H), quick link (G) and loop (F). Exit through the canopy (D). Lift canopy (D) to ceiling outlet box.
10. Make proper electrical connections, as described in steps 11 - 13. **A LICENSED ELECTRICIAN IS RECOMMENDED.**
11. Attach ground wire from fixture (green or silver in color) to ground wire from outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
12. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
13. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
14. Carefully push wire connections back into ceiling outlet box.
15. Place canopy (D) over mounting plate (B). Thread canopy screws (E) into holes in canopy (D) and mounting plate (B) to secure fixture to ceiling.
16. Carefully place shade frame (L) onto shade housing (M) so holes in shade frame and housing align. Insert shade screws (K) into threaded holes to secure shade to fixture.
17. Reach inside shade (L) and install one (1) 40-watt maximum Type A medium base filament bulb or one (1) 11W LED medium base bulb into socket.