



## MARTINEAU LINEAR CHANDELIER 54"

ASSEMBLY & INSTALLATION INSTRUCTIONS


**UNITED STATES ENGLISH**

**MARTINEAU LINEAR CHANDELIER 54"****PARTS INCLUDED**

- (A) Mounting Plate (1)
- (B) Quick Links (2)
- (C) Hex Nuts (2)
- (D) Ring Terminals with Bare Ground Wire (1)
- (E) Tooth Lock Washers (2)
- (F) Canopy (1)
- (G) 5/16"L Hex Socket Set Screws (6)
- (H) 3/4"L Threaded Nipples (2)
- (I) Hanging Mechanisms (2)
- (J) 19" Extension Threaded Pipes (4)
- (K) 18" Extension Rods (4)
- (L) 13" Extension Threaded Pipes (4)
- (M) 12" Extension Rods (4)
- (N) 7" Extension Threaded Pipes (4)
- (O) 6" Extension Rods (4)
- (P) Couplings (12)
- (Q) Threaded Heads (2)
- (R) Shades (8)
- (S) Curved Panels (8)
- (T) Thumb Screws (16)
- (U) Type G16.5 E12 Base LED Bulb (8)
- (V) Allen Wrench (1)
- (W) Wire Nuts (3)

**TOOLS NEEDED**

- Phillips-Head Screwdriver (1)

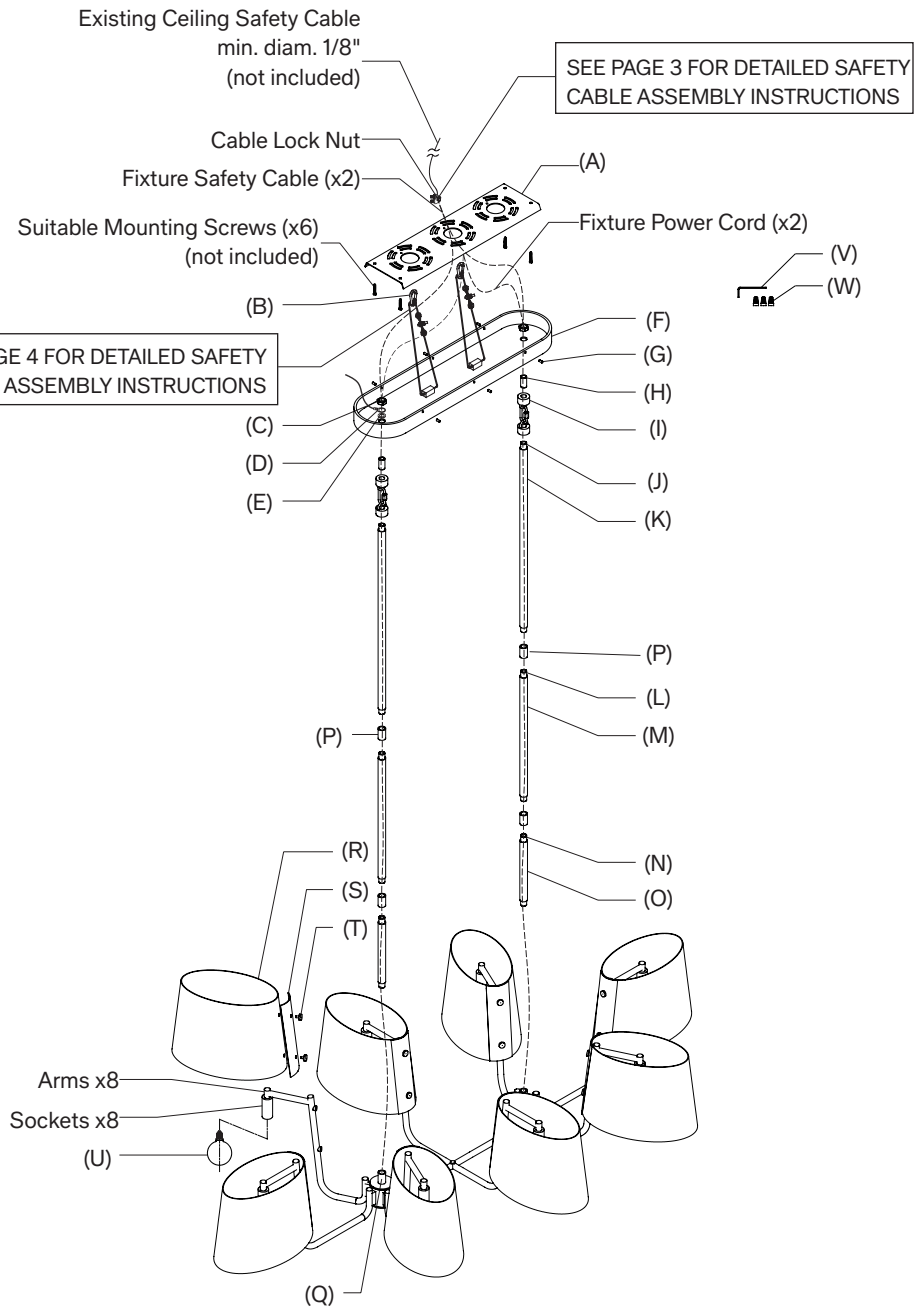

**IMPORTANT: PLEASE READ**

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING TO A WOODEN STRUCTURAL BEAM. UNIQUE OR ALTERNATIVE INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

**IMPORTANT SAFETY FEATURES****BULBS**

This fixture has been rated for up to eight (8) 5.5-watt maximum Type G16.5 E12 Base LED Bulbs (U). To avoid risk of fire, do not exceed the recommended wattage.

**VAULTED-CEILING COMPATIBILITY**

This fixture is not vaulted ceiling compatible.

**DIMMER-SWITCH COMPATIBILITY**

This fixture is dimmer-switch compatible and may only be used with a forward-phase dimmer.

**CEILING REINFORCEMENT**

Fixtures weighing 50 lb or more will require additional reinforcement above the ceiling where they are to be installed.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.


**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.


**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.**

**INSTALLING THE SAFETY CABLE**



1. Remove Hex Nuts from Cable Lock Nut and pull Cable Lock Nut from Cable Clip.

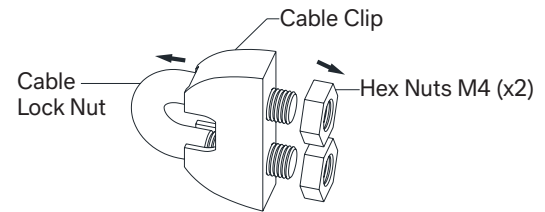


2. Join fixture Safety Cables with Safety Cable from ceiling and wrap all Safety Cables around the Cable Lock Nut.

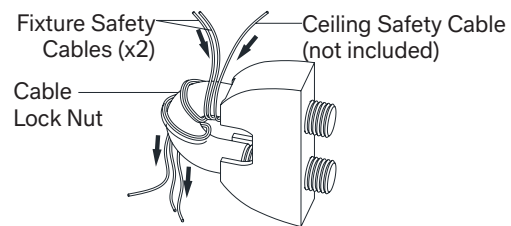

3. Secure by tightening both Hex Nuts.

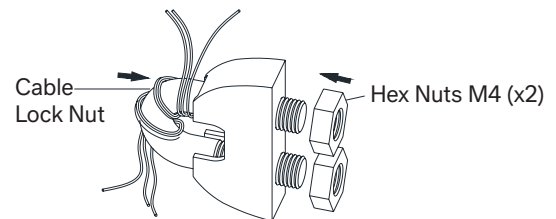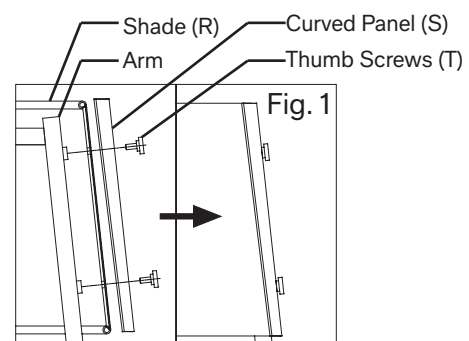
**INSTALLING THE SHADE**

## WIRING DIAGRAM

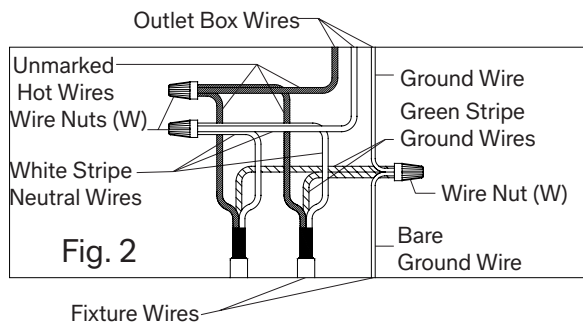


## INSTALLING THE SAFETY CABLE

1. Open the Quick Link (B) and hang it on the Loop.

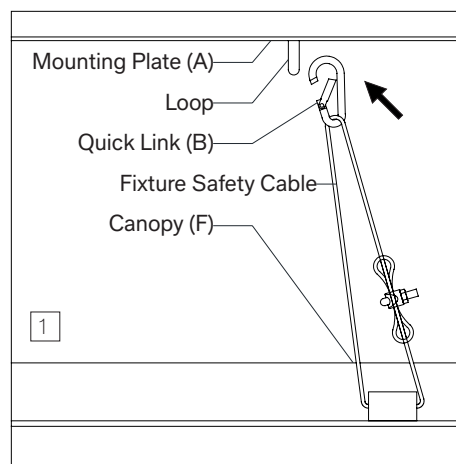

2. Close the Quick Link (B).

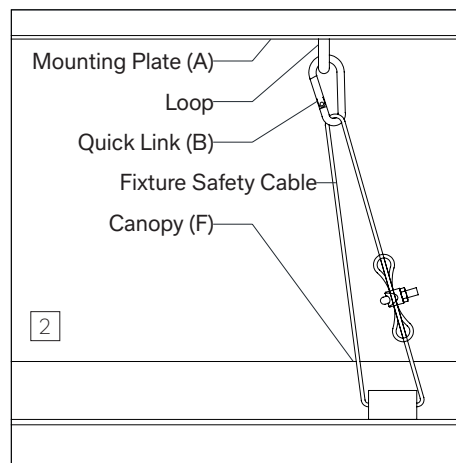

**ASSEMBLY AND INSTALLATION****SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Determine the hanging length of fixture. Connect the Threaded Head (Q) to some or all Extension Rods (K), (M), (O), Extension Threaded Pipes (J), (L), (N), and Couplings (P) according to the desired height. Secure the first Threaded Pipe with Coupling (P). Feed wires and safety cable through the Extension Threaded Pipe at the same time.
3. Connect the Hanging Mechanism (I) to Extension Threaded Pipe (J), (L), (N).
4. Place the Canopy (F), Tooth Lock Washer (E), and Ring Terminals with Bare Ground Wire (D) to the Hanging Mechanism (I) and secure by tightening the Hex Nut (C) to the 3/4"L Threaded Nipple (H). Feed wires and safety cables through the 3/4"L Threaded Nipple (H) at the same time. The wires and safety cable will come out the backside of the Canopy (F).
5. Attach the Mounting Plate (A) to the ceiling's outlet box with suitable mounting screws (not included) and proper fasteners from your local hardware store.
6. Carefully inspect the fixture wires. Clear wire with White Stripe is the NEUTRAL WIRE. Clear, unmarked wire is the HOT WIRE. The clear wire with Green Stripe and the bare wire are the GROUND WIRES.
7. Carefully lift the fixture's Canopy (F) close to the outlet box for wiring and to connect the safety cables.
8. Connect each of the Quick Links (B) from the Canopy (F) to the Mounting Plate (A) (see Page 4).
9. Secure the safety cables (x2) from the fixture and the existing ceiling's safety cable (not included) using the Cable Lock Nut (see Page 3).
10. Connect the GREEN GROUND WIRE and BARE GROUND WIRE from the fixture with the ground wire (usually bare) from your outlet box using a Wire Nut (W). If your house does not have a ground wire, attach the GROUND WIRES from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
11. Connect the NEUTRAL WIRE from your fixture with the neutral wire (usually white) from your outlet box using a Wire Nut (W).
12. Connect the HOT WIRE from your fixture with the hot wire (usually black) from your outlet box using a Wire Nut (W). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, AS SAFETY WILL BE COMPROMISED.
13. Tuck the wire connections neatly into the ceiling's outlet box.
14. Secure the Canopy (F) to the affixed Mounting Plate (A) by tightening each 5/16"L Hex Socket Set Screws (G) with the Allen Wrench (V).
15. Secure the Shades (R) and Curved Panels (S) to each of the Arms with the Thumb Screws (T) (see Fig. 1).
16. Insert the Type G16.5 E12 Base LED Bulb (U) into each socket.
17. Assembly is complete.

**CARE INSTRUCTIONS**

Wipe all surfaces with a soft, dry cloth. Clean glass with a mixture of mild soap and water. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.