

RH

OLYMPIC FLOOR LAMP


ASSEMBLY & INSTALLATION INSTRUCTIONS

**ENGLISH**

**OLYMPIC FLOOR LAMP**

**PARTS INCLUDED**

- (A) Head (1)
- (B) Arms (1)
- (C) Neck (1)
- (D) Plate (1)
- (E) Legs (3)
- (F) Disc (1)
- (G) 5/32-32T Set Screw (1)
- (H) Hex Nut (1)
- (I) Ring (1)
- (J) Flange (1)
- (K) Rotary Dimmer Switch (1)
- (L) Flat-Head Socket Cap Screws (4)
- (M) Housing (1)
- (N) Column (1)
- (O) Allen Wrench (1)

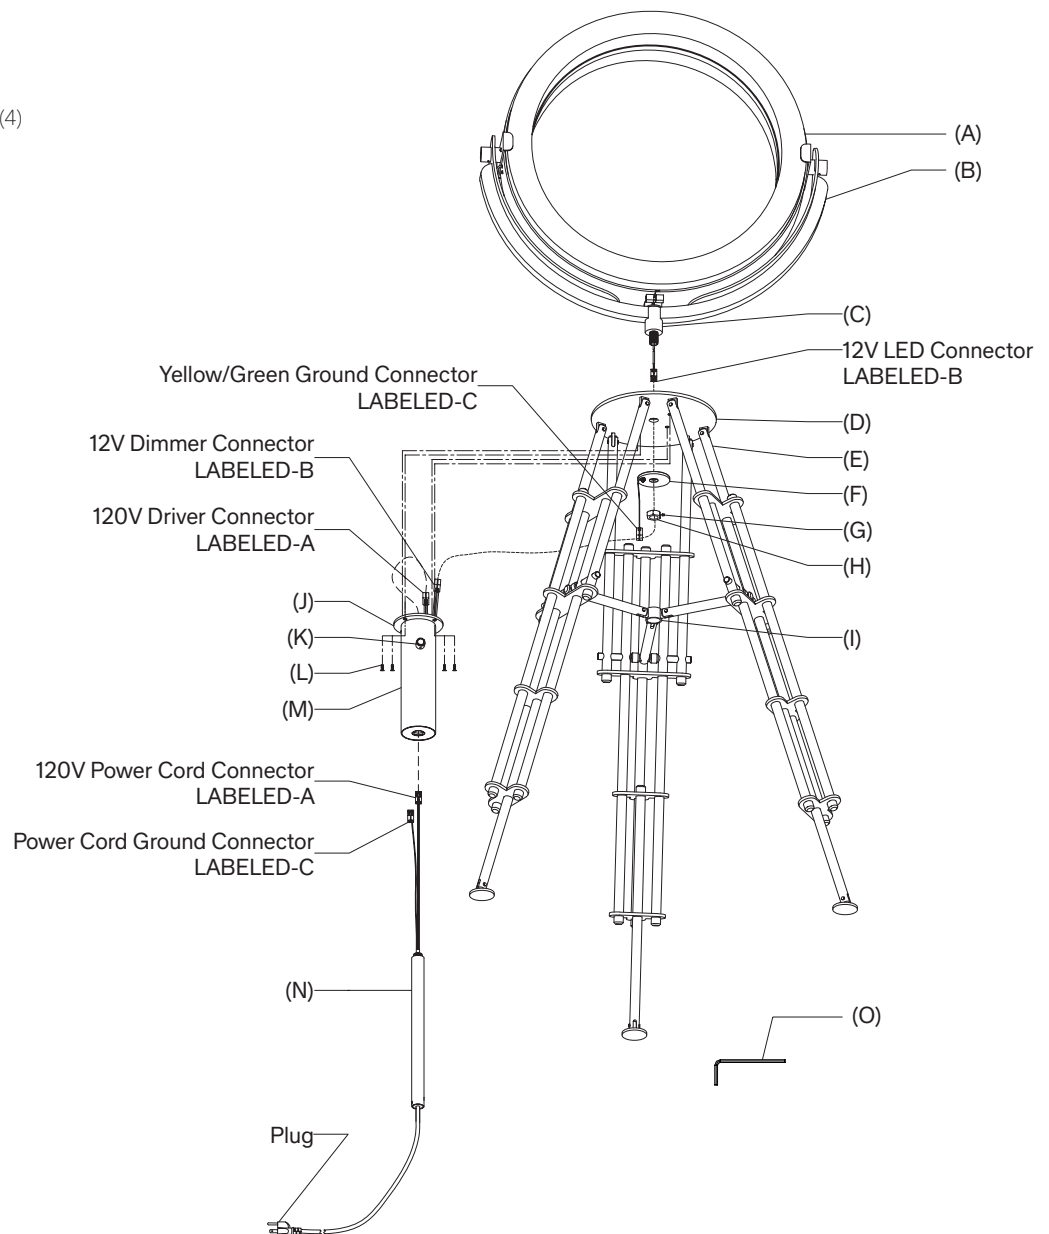

**IMPORTANT: PLEASE READ****IMPORTANT SAFETY FEATURES****BULBS**

This lamp has been rated for up to one (1) 18.5-watts maximum 12VDC LED light strip (included). To avoid the risk of fire, do not exceed the recommended wattage.

**DIMMER-SWITCH COMPATIBILITY**

This lamp is dimmer-switch compatible, and may only be used with a forward-phase dimmer switch.


**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing the LED light strip. Do not touch or look directly at the LED light strip when lamp is illuminated. Keep flammable materials away from lit LED light strip.

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.**

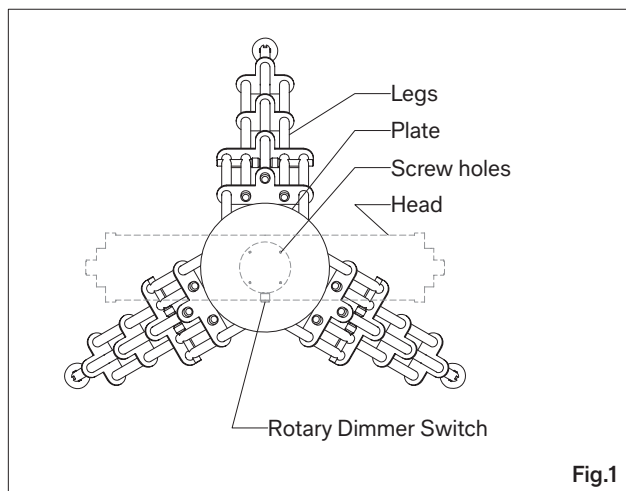**HEAD AND ROTARY DIMMER SWITCH ORIENTATION****ASSEMBLY AND INSTALLATION**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Fully spread the Legs (E) and place the lamp on a clean surface.
3. Carefully lift the Head (A) above the Legs (E) and place the Neck (C) in the center of the Plate (D), then use a Disc (F) and a Hex Nut (H) to secure the Neck (C) in place. Do not fully tighten the Hex Nut (H) to allow the Disc (F) to be adjusted. Align the Head (A) (see Fig. 1), then fully tighten the Hex Nut (G) and tighten the 5/32-32T Set Screw (G) inside the Hex Nut (H). Run the wire through at the same time.
4. Place the Housing (M) above the Ring (I). Then, from below, slide the Column (N) halfway above the Ring (I). Run the 120V Power Cord Connector (LABELED-A) through the Housing (M) then thread the Column (N) to the Housing (M).
5. Carefully inspect the lamp's wires. The line voltage (120V) wires are LABELED-A. The low voltage (12V) wires are LABELED-B. The ground wires are LABELED-C.
6. Connect the Yellow/Green Ground Connector (LABELED-C) with the Power Cord Ground Connector (LABELED-C).
7. Connect the 12V LED Connector (LABELED-B) with the 12V Dimmer Connector (LABELED-B). WARNING: DO NOT REVERSE THE POLARITY AS THIS MAY PERMANENTLY DAMAGE THE DRIVER OR THE LED DIODES.
8. Connect the 120V Power Cord Connector (LABELED-A) with the 120V Driver Connector (LABELED-A). Neatly place all connectors inside the Housing (M).
9. Secure the Flange (J) to the Plate (D) with the Flat-Head Hex Socket Cap Screws (L) and the Allen Wrench (O). Make sure the Rotary Dimmer Switch (K) is not facing a Leg (E) (see Fig. 1).
10. Insert the plug into a power outlet.
11. Turn on the Rotary Dimmer Switch (K).
12. Assembly is complete.

**CARE INSTRUCTIONS**

Wipe all surfaces with a soft, dry cloth. Clean glass with a mixture of mild soap and water. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.