

### PARTS ENCLOSED

- (A) Junction Box (Not included) 22.7kg/50lbs.MIN. FIXTURE RATED
- (B) Mounting Screws (Not included. 1 Set)
- (C) Wire Nut (3)
- (D1) Wall Plate (1)
- (D2) Screw Cap (2)
- (E1) Body (1)
- (E2) Screw (4)
- (F) Shade (1)
- (G) Bulb (5 Extra)

### PRODUCT DESCRIPTION:


General material: Selenite & Iron

Height: 17.5cm (6.89in)

Width: 17.5cm (6.89in)

Length: 107.0cm (42.13in)

Weight: 15.0kg (33.04lbs)

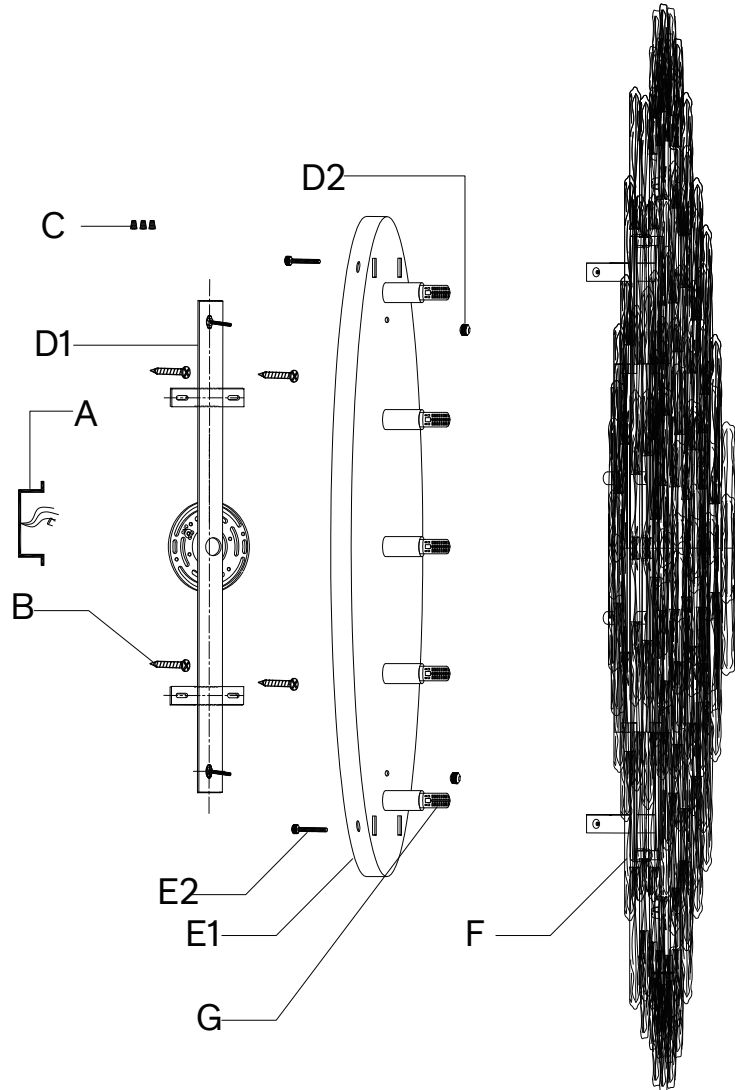

**IMPORTANT PLEASE READ****WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.****SAFETY INSTRUCTIONS:**

1. Use an authorized and certified electrician for consultation and installation.
2. This fixture has been rated for 5 x 4-watt G9 LED bulbs.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The wall must have at least the capacity of 5 times the weight of the wall light. For this light, at least a wall capacity of 75.0kg (165.20lbs) is required.
5. The manufacturer and distributor accept no liability for incorrect installation.
6. For indoor use only.
7. Keep away from children.

**WARNINGS:**

1. Turn off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electricity shock, or personal injury when replacing lightbulb, do not touch bulb when fixture is turned on. Always turn off the ceiling light and allow it to cool prior to changing bulb. Never look directly at a lite bulb. Keep flammable materials away from lite bulb.
4. Deviation from instructions may result in a risk of fire or electric shock.

 **WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE .**

 **WARNING: STRANGULATION HAZARD**

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

 **WARNING:**

1. Do not place the lighting on the floor directly or any hard surface as it can damage the fixture.
2. Ensure the fixture is properly hung from the wall before removing the iron packaging.

**ASSEMBLY & INSTALLATION:**

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the wall light will be installed.
3. Loosen the screw cap (D2) and detach the wall plate (D1) from the body (E1).
4. Attach the wall plate (D1) to the wall with mounting screws (B).
5. Connect the ground wire from the fixture to the ground junction box wire (A) (usually the green or bare wire) with a wire nut (C) and wrap the connection with electrical tape. Connect the hot wire to the hot junction box wire (A) (usually black or smooth) with a plastic wire nut (C) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (A) (usually white or ribbed) with a plastic wire nut (C) and wrap the connection with electrical tape.
6. Attach body (E1) into the wall plate (D1) with screw caps (D2).
7. Fasten lightbulbs (G) to the lampholders.
8. Attach the shade (F) onto the body (E1) with screws (E2).
9. Restore power to the junction box and test ceiling light fixture.

**CARE INSTRUCTIONS:**

1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.
3. The cable/cord of this wall lamp cannot be replaced; if the cable is damaged, do not use the lamp.

**ENVIRONMENT:**

Special waste handling may be required. Please contact your local authorities for more information.

## CEILING SAFETY CABLE ASSEMBLY

1. Remove the Nut locker A & B by loosening the Set Screw from the Ceiling safety cable before installation.
2. Insert the Ceiling safety cable through the Nut lockers as the drawing shows.
3. Fasten the Nut locker A with Set Screw by Small Allen Key.
4. Fasten the Nut locker B with Set Screw by Small Allen Key.

