




RIVAGE SCONCE

ASSEMBLY & INSTALLATION INSTRUCTIONS

**UNITED STATES ENGLISH**

**RIVAGE SCONCE****PARTS INCLUDED:**

- (A) Junction Box, 25lbs/11.3kg MIN. FIXTURE RATED (not included)
- (B) Mounting Screws and Plastic Plugs (4 sets; for concrete wall or drywall)
- (C) Wire Nuts (3)
- (D) Wall Plate (1)
- (E) Wall Box (1)
- (F) Calcite Shade (1)
- (G) Bolt (1)
- (H) Safety Cable (1)

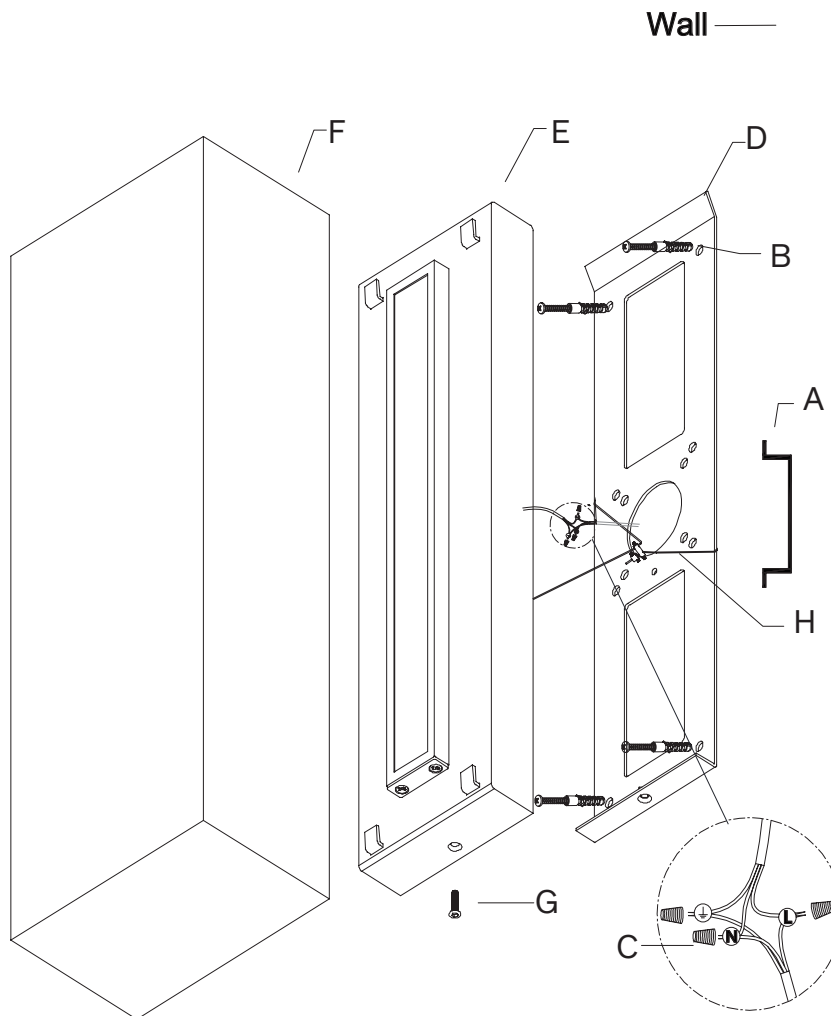

**IMPORTANT: PLEASE READ**

**PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING TO CONCRETE WALL OR DRY WALL. UNIQUE OR ALTERNATIVE INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.**

**INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.**

**IMPORTANT SAFETY FEATURES****BULBS**

This fixture has been rated for one (1) 10-watt LED module. To avoid the risk of fire, do not exceed the recommended wattage.

**DIMMER SWITCH COMPATIBILITY**

This fixture is dimmer-switch compatible and may be used with a forward-phase dimmer switch.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet (91cm) away from cribs, bassinets, and toddler beds.

Keep out of reach of children under 3 years of age.

**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.**

**ASSEMBLY AND INSTALLATION****SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn OFF power to junction box (A) where the fixture will be installed.
3. Loosen the bolt (G) and detach the wall plate (D) from the wall box (E).
4. Have a professional contractor reinforce wall.
5. Attach the wall plate (D) to the wall and secure with mounting screws and plastic plugs (B).
6. Carefully inspect the fixture wires. One is the ground wire (marked with  $\oplus$ ). The second is the neutral wire (marked with N). The third wire is the live/hot wire (marked with L).
7. Connect the fixture ground wire to the power supply ground wire with wire nut (C).

NOTE: IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.

8. Connect the fixture neutral wire to the power supply neutral wire with wire nut (C).
9. Connect the fixture live/hot wire to the power supply live/hot wire with wire nut (C).

CAUTION: DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, AS SAFETY WILL BE COMPROMISED.

10. Attach the wall box (E) to the wall plate (D) and secure with bolt (G).
11. Hang the calcite shade (F) on the wall box (E).
12. Restore power to the junction box and test fixture.
13. Assembly is complete.

**CARE INSTRUCTIONS**

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

**LIGHT SOURCE AND LED DRIVER REPLACEMENT INSTRUCTIONS**

1. Turn OFF power to junction box.
2. Uninstall the lighting fixture from the wall.
3. Take off the calcite shade (F), loosen the bolt (G) from the wall box (E), unwire fixture wires with power supply wires and remove the wall box (E) from the wall plate (D).
4. Replace the new wall box (E) fixed with light source and LED driver, then connect power supply wires to input wires from the LED driver with wire nut.

Note: Connect the fixture ground wire to the power supply ground wire with wire nut (C). Connect the fixture neutral wire to the power supply neutral wire with wire nut (C). Connect the fixture live/hot wire to the power supply live/hot wire with wire nut (C).

5. Fix back wall box (E) and calcite shade (F) as explained in steps 10 to 13 in "ASSEMBLY AND INSTALLTION" section.

