




ROUSSEAU DOUBLE SCONCE
ASSEMBLY & INSTALLATION INSTRUCTIONS
ENGLISH

ROUSSEAU DOUBLE SCONCE 20"

PARTS INCLUDED

- (A) Plastic Anchors (2)
- (B) Mounting Plate (1)
- (C) Wood Screws (2)
- (D) Mounting Screws (2)
- (E) Fixture Base (1)
- (F) Screws (2)
- (G) Wire Nuts (2)
- (H) Glass Rods (2)

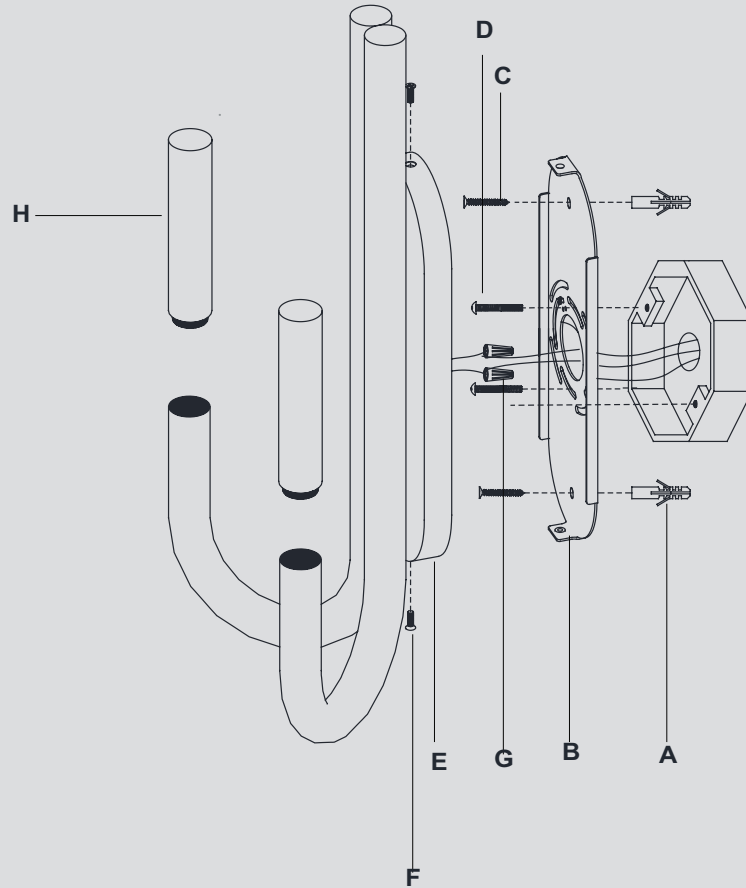

IMPORTANT: PLEASE READ**IMPORTANT SAFETY FEATURES**

This fixture is compatible with an Electric Low Voltage (ELV)

Dimmer. LED module is replaceable.

DIMMER SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible, and may only be used with a forward phase dimmer switch.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

ASSEMBLY AND INSTALLATION**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Remove Mounting Plate (B) from Fixture Base (E) by removing Screws (F).
3. Place Mounting Plate (B) on the wall and mark the anchor holes position with pencil. Drill holes on the wall and insert Plastic Anchors (A) into the holes.
4. Install Mounting Plate (B) to the wall junction box and secure with Mounting Screws (D) then secure Wood Screws (C) into Plastic Anchors (A).
5. Wrap the junction box ground wire to the green ground screw on Mounting Plate (B) and secure. **NOTE: IT IS IMPERATIVE THAT THE FIXTURE BE GROUNDED.** Connect fixture white wire to the neutral wire in the junction box using a Wire Nut (G).
6. Connect fixture black wire to the hot wire in the junction box using a Wire Nut (G). **CAUTION:** Do not reverse the hot and neutral connections.
7. Install Fixture Body (E) to Mounting Plate (B) and secure with Screws (F).
8. Thread Glass Rods (H) to Fixture Body (E). **NOTE:** Do not overtighten, otherwise, Glass Rods (H) could become damaged.
9. Installation is complete; turn on power at fuse or circuit breaker.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

FCC COMPLIANCE:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC COMPLIANCE:

This Class B digital apparatus complies with CAN ICES-005 (B) /NMB-005(B).

RESTORATION HARDWARE
15 KOCH ROAD
CORTE MADERA, CA 94925
1-800-762-1005