




**SAVILE LINEAR CHANDELIER 24"**  
ASSEMBLY & INSTALLATION INSTRUCTIONS  
**ENGLISH**

## PARTS INCLUDED

- (A) Mounting Loop (1)
- (B) Canopy (1)
- (C) Canopy Ring (1)
- (D) End Link (1)
- (E) Hanging Loop (1)
- (F) Mounting Plate (1)
- (G) 18" Connection Rods (2)
- (H) 12" Connection Rods (2)
- (I) 6" Connection Rods (2)
- (J) Connectors (5)
- (K) Top Threaded Caps (2)
- (L) Bolts (2)
- (M) Nuts (2)
- (N) Socket Bracket (1)
- (O) Allen Wrench (1)
- (P) Shade (1)
- (Q) Bottom Threaded Caps (2)
- (R) Bulbs (2)
- (S) Mounting Screws (2)

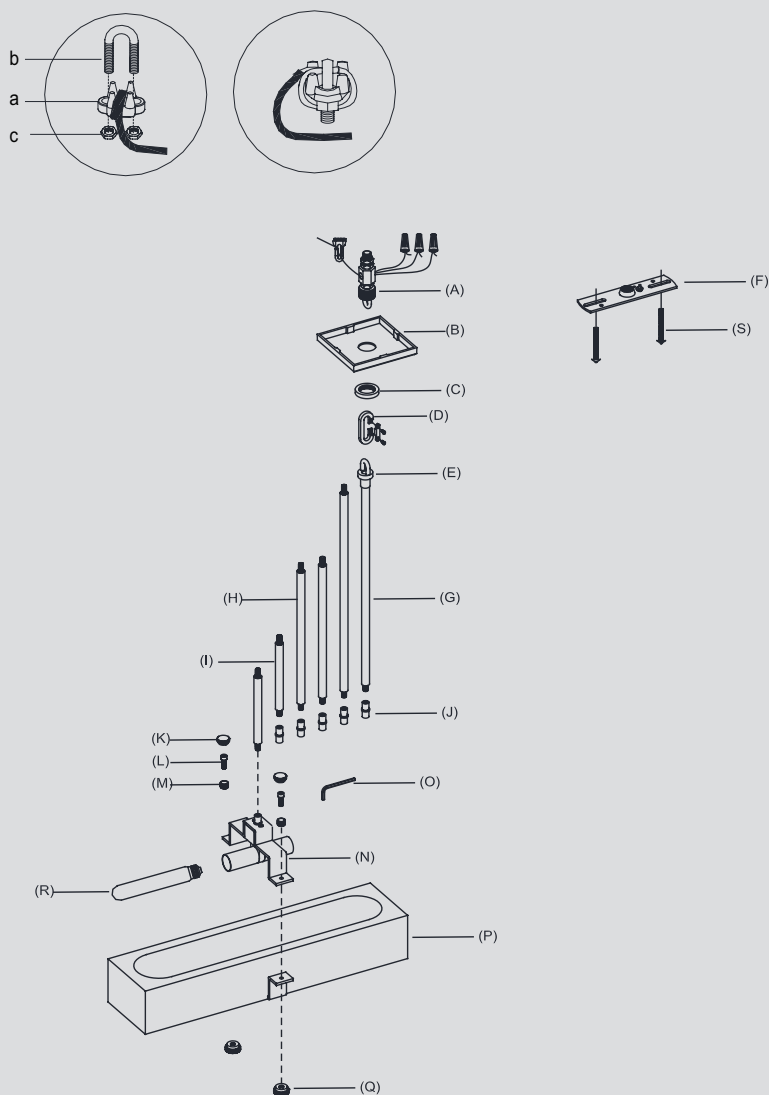

**IMPORTANT: PLEASE READ**

**PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE.**

**THIS FIXTURE MUST BE MOUNTED DIRECTLY TO THE STRUCTURAL SUPPORT IN YOUR CEILING USING HARDWARE THAT IS SUITABLE FOR YOUR SPECIFIC APPLICATION. INSTALLATION HARDWARE IS NOT PROVIDED AND MUST BE PURCHASED FROM A LOCAL HARDWARE STORE.**

**INSTALLATION BY A LICENSED ELECTRICIAN FAMILIAR WITH HEAVY LIGHTING FIXTURES IS STRONGLY RECOMMENDED.**

**IMPORTANT SAFETY FEATURES****BULBS**

This fixture has been rated for up to two (2) 40-watt maximum Type T incandescent lightbulbs or up to two (2) 9-watt maximum LED lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

**VAULTED-CEILING COMPATIBILITY**

This fixture is vaulted-ceiling compatible, up to a maximum ceiling slope of 20 degrees.

**DIMMER-SWITCH COMPATIBILITY**

This fixture is dimmer-switch compatible, and may only be used with a forward-phase dimmer switch.

**CEILING REINFORCEMENT**

Fixtures weighing 50 lb. or more will require additional reinforcement above the ceiling where they are to be installed.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).


**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets and toddler beds. Keep out of reach of children under 3 years of age.

**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE**

**INSTALL SAFETY CABLE:**

1. Run safety cable through the junction box and around a structural member of the building.
2. Wrap the safety cable around the saddle (a), and secure with u-bolt (b) and hex nuts (c).

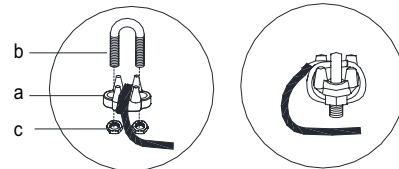


## ASSEMBLY AND INSTALLATION

**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM  
THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. It is recommended to install a 1/4" IPS (1/2" diameter) threaded pipe secured to a structural member of the building (not included). Then attach threaded receiver on top of fixture to threaded pipe and tighten with wrench.  
NOTE: Item must be supported independent of the junction box due to hanging weight.
3. Attach Mounting Loop (A) to the threaded receiver attached to a structural member by tightening locknut.
4. Attach Canopy (B) to Mounting Loop (A) and secure with Canopy Ring (C).
5. Determine desired overall length, then feed the wires and safety cable through some or all Connection Rods (G) (H) (I) and Connectors (J).
6. Determine desired overall length, then connect some or all Connection Rods (G) (H) (I) and Connectors (J) to the joint of Socket Bracket (N).
7. Feed the wires and safety cable through Mounting Loop (A).
8. Loosen Canopy Ring (C). Slide Canopy (B) and Canopy Ring (C) down 18" Connection Rod (G) carefully.
9. Connect Hanging Loop (E) to Mounting Loop (A) using End Link (D) and secure the screws on each side of End Links (D).
10. Connect the safety steel wire from the fixture and the safety cable from the ceiling. Refer to the illustration on previous page.
11. Continue feeding fixture ground wire and connect to supply ground wire (usually green or bare copper) using a wire nut. NOTE: It is imperative that the fixture is grounded.
12. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using a wire nut.
13. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using a wire nut. CAUTION: Do not reverse the hot and neutral connections.
14. Make sure all wire connections are tight, then carefully tuck into the junction box.
15. Attach Canopy (B) to Mounting Plate (F) and secure with Canopy Ring (C).
16. Remove Bolts (L) and Nuts (M) from Socket Bracket (N) by Removing Top Threaded Caps (K) and Bottom Threaded Caps (Q). Attach Socket Bracket (N) to Shade (P) by aligning the holes and securing with Nuts (M), Bolts (L), Top Threaded Caps (K) and Bottom Threaded Caps (Q). Tighten with Allen Wrench (O).
17. Insert Bulbs (R) into each of the sockets.
18. Restore power to outlet box and check operation of fixture.
19. Assembly is complete.

**HEIGHT ADJUSTMENT INSTRUCTIONS**

1. Feed the wires through Rod (I), then thread Rod (I) onto the joint of Cap (L).
2. Feed the wires through Rod (H), then thread Rod (H) onto Rod (I).
3. Feed the wires through Rod (G), then thread Rod (G) onto Rod (H).

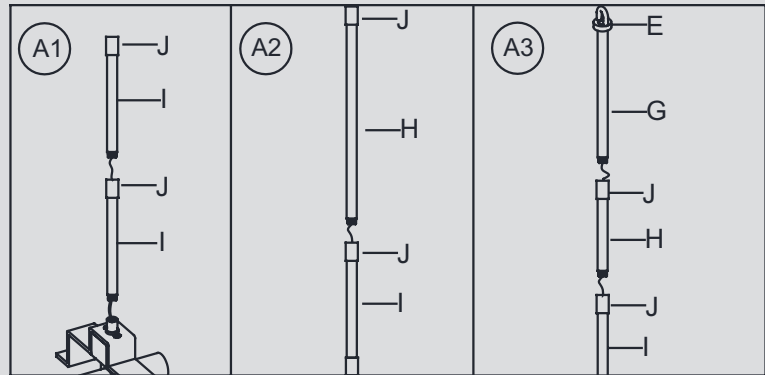


**ATTENTION: ADJUSTING THE HANG HEIGHT**

Any adjustments or alterations to the fixture, cord or overall hang height that differ from those detailed on RH.com will void the Laboratory Listing and Approvals (UL, ETL, CSA, etc.). If the listing is voided, this means the product may no longer be safe for use as modified. RH does not recommend modifying the product.


**CARE INSTRUCTIONS**

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

10' CEILING HEIGHT

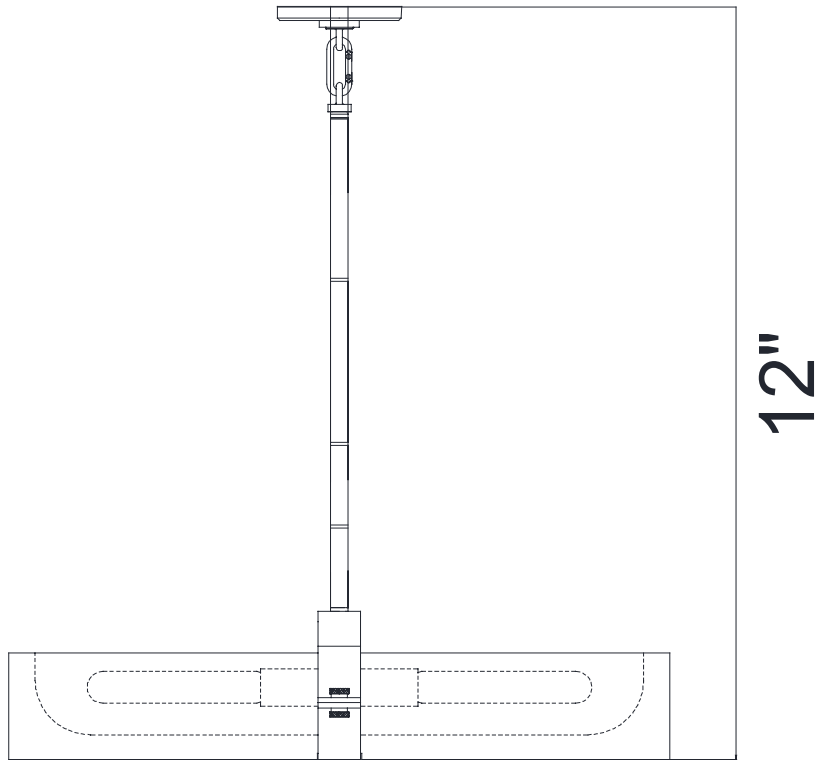

11' CEILING HEIGHT

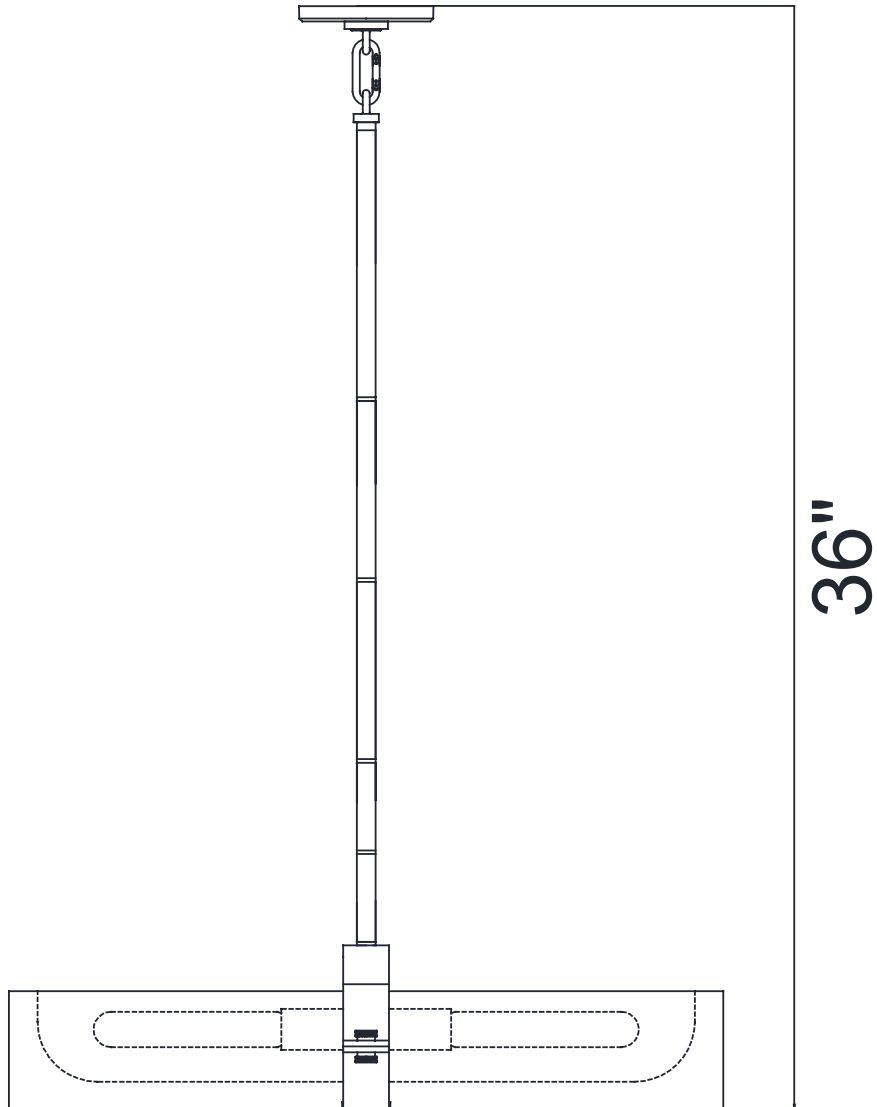



12' CEILING HEIGHT

