


VOUVRAY ROUND CHANDELIER 72" - ASSEMBLY INSTRUCTIONS

PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Canopy (1)
- (C) Ring (1)
- (D) Tube (1)
- (E) Center Box (1)
- (F) Rods (3)
- (G) Frame (1)
- (H) Link (1)
- (I) Extension Tubes (6)

HARDWARE INCLUDED

- (a) Plastic Wire Connectors (7)
- (b) Toggles (6)
- (c) Screws (6)
- (d) Allen Wrench (1)
- (e) Safety Cable (1)
- (f) Cable Lock (1)
- (g) Green Ground Screw (1)

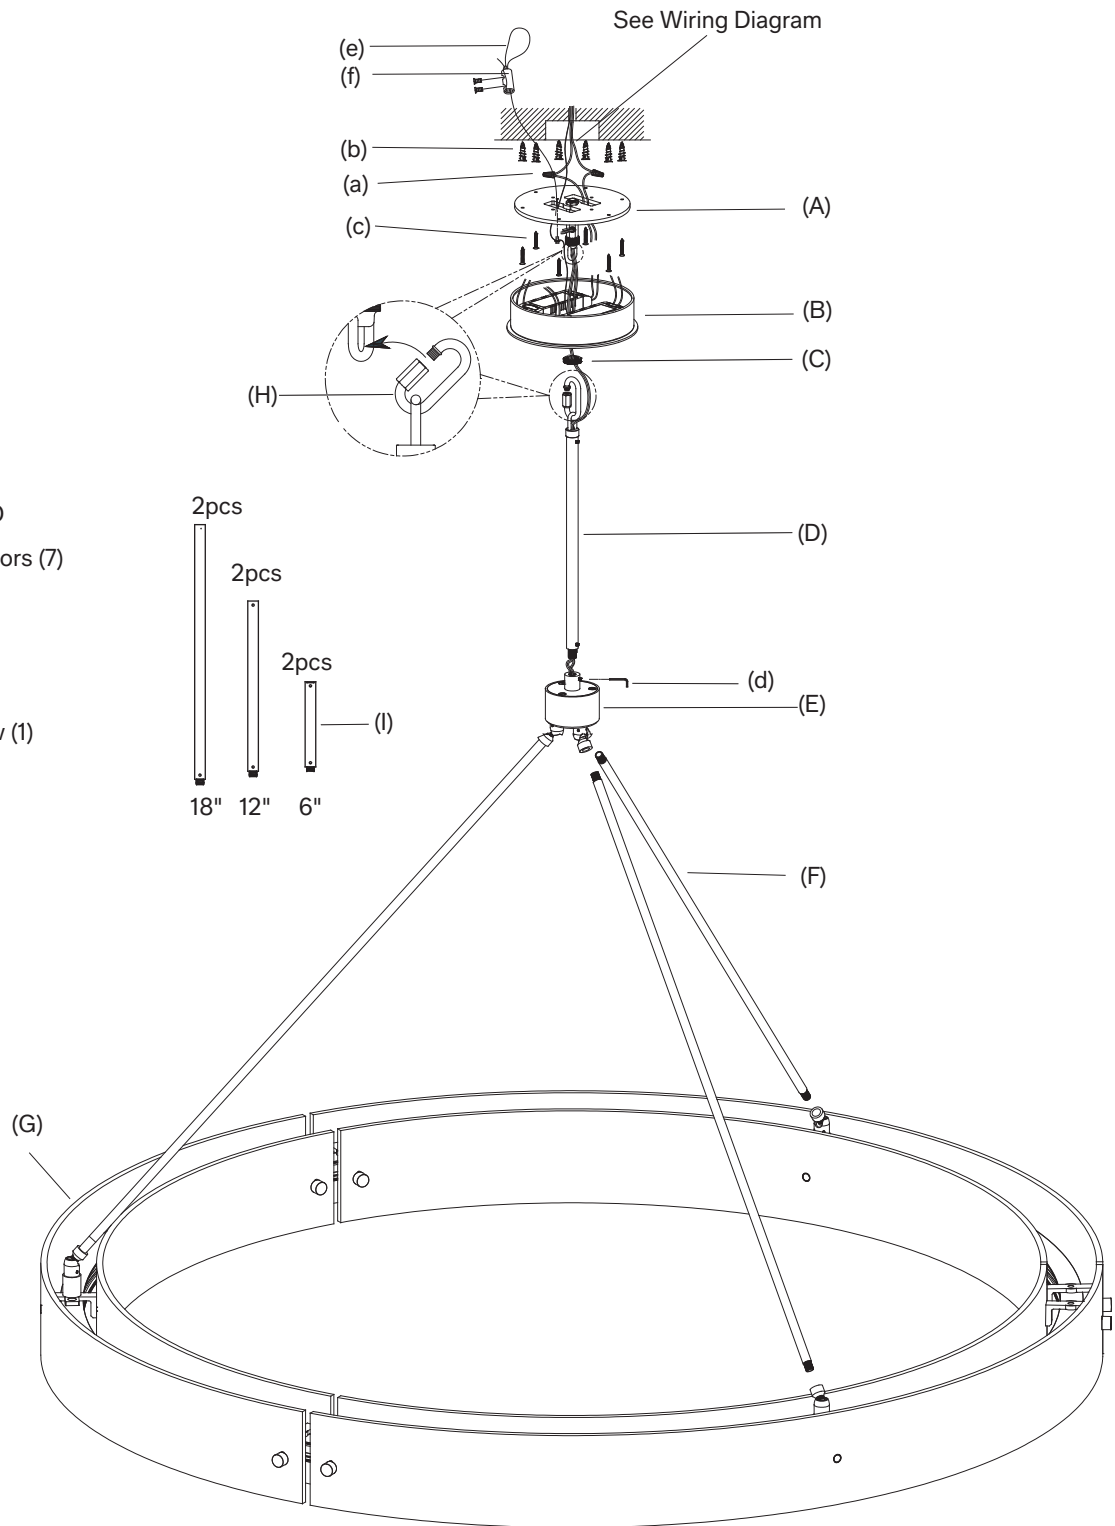

IMPORTANT SAFETY INSTRUCTIONS

Use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial-type applications of very heavy fixtures.

The ceiling must have at least the capacity of 5 times the weight of the fixture. For this fixture, a ceiling capacity of at least 1265 lbs (575 kg) is required.

Due to the weight of this fixture, it will require at least four people or a lifter to install.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. Do not touch or look directly at the LED strip when fixture is illuminated. Keep flammable materials away from lit LED strip.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.


THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

SAFETY CABLE INSTALLATION

1. A Ceiling Safety Cable with the capacity of at least 253 lbs (115 kg) is required for this fixture.
2. Join the Fixture Safety Cable (e) with the Ceiling Safety Cable.
3. Wrap both Safety Cables around the Cable Lock (f).
4. Secure by tightening the two Lock Screws.

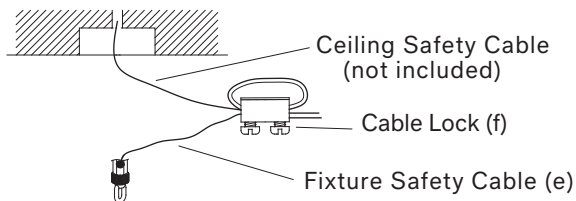**ASSEMBLY & INSTALLATION**


SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Screw the Rods (F) into the Frame (G) and the Center Box (E) and fully tighten.
3. Put the Tube (D) into the Center Box (E) and turn clockwise until the Tube (D) fully screws into the Center Box (E). Secure the Tube (D) using Allen Wrench (d) provided. If needed, the Extension Tube(s) (I) can be attached.
4. Mark the location of the mounting holes on the ceiling using a pencil. Then, using the marks as a guide, drill holes for the Toggles (b). Fully screw the Toggles (b) into the ceiling using a screwdriver until flush with the ceiling.
5. Attach the Safety Cable (e) to an appropriate load-bearing structure on the ceiling with Cable Lock (f). This fixture must be mounted or supported independently of an outlet box. Do not attach Safety Cable (e) onto the outlet box.
6. Screw the ground wire from the fixture onto Mounting Plate (A) with Green Ground Screw (g) and fully tighten with a screwdriver. Or, cut the metal washer at the end of the ground wire and attach the ground wire from the fixture to the junction box ground wire from the outlet box (usually green or bare wire) with a Plastic Wire Connector (a) and wrap the connection with electrical tape.
7. Refer to the Wiring Diagram on the following page for accurate wire connection information. Cut out any redundant wires after professional installation. Keep proper ventilation around the driver and do not stack any objects on top of it.
8. Fasten Mounting Plate (A) onto the ceiling using the Screws (c). Fully tighten Screws (c) into Toggles (b) with a screwdriver.
9. Connect Mounting Plate (A) and Tube (D) loops using Link (H). Fully tighten with the Link Nuts.
10. Attach Canopy (B) to Mounting Plate (A) using Ring (C) and fully tighten.
11. Restore power to the junction box and test fixture.
12. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture.
Wipe clean with a soft, dry cloth.

Wiring Diagram

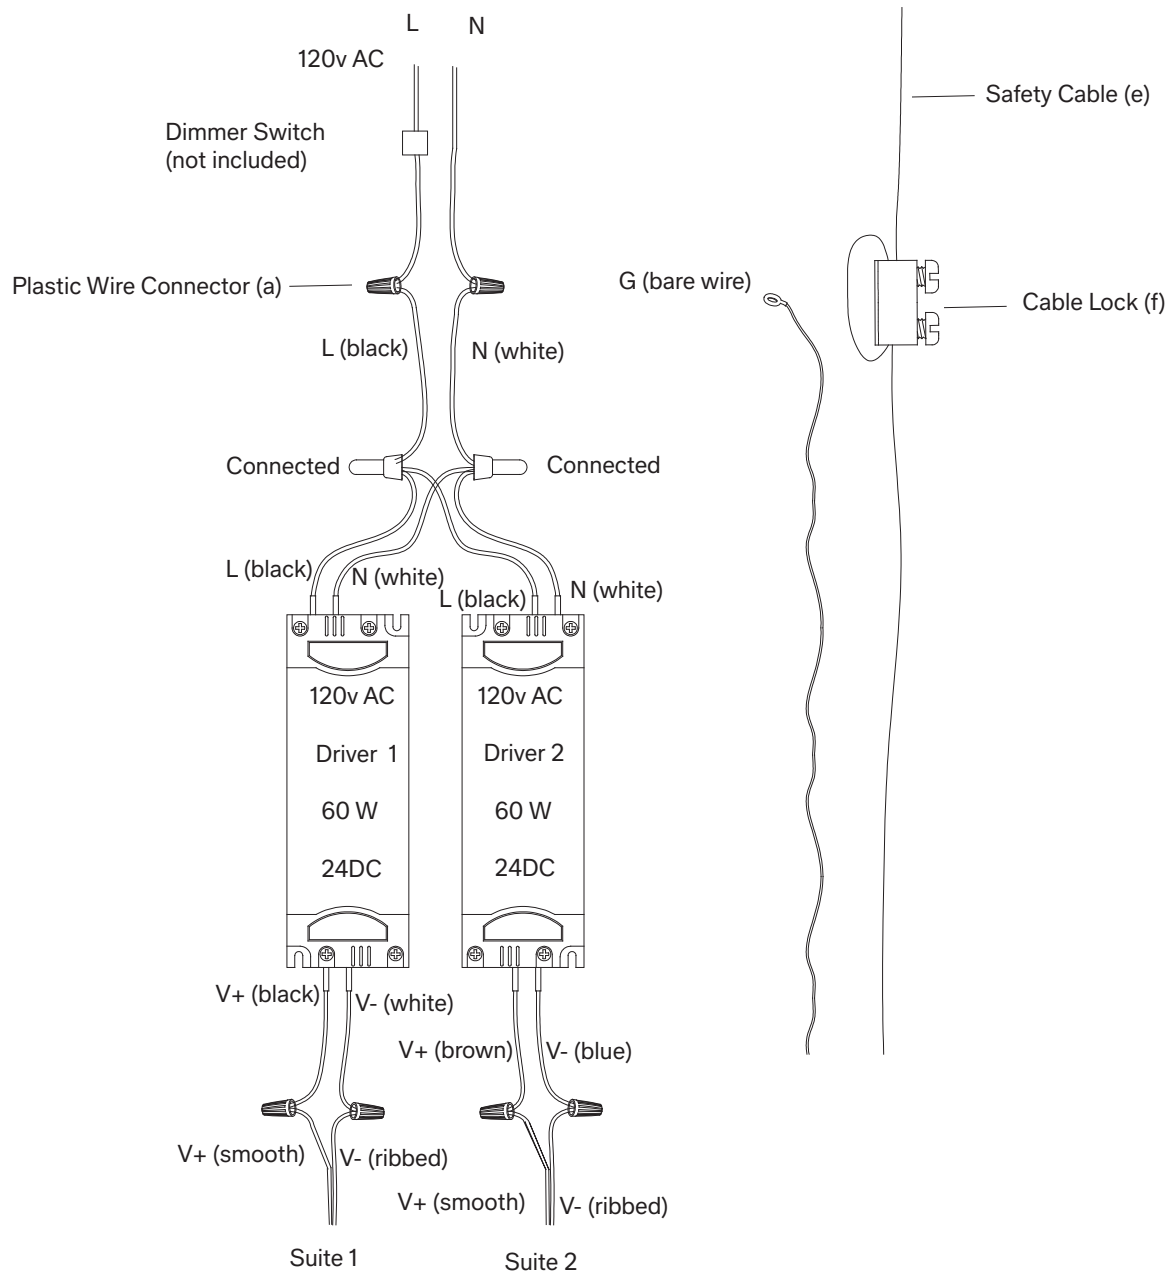

Suite Wires 1 and 2 and the Safety Cable come from the Mounting Plate

Note:

1. THESE DRIVERS ARE DESIGNED TO BE INSTALLED WITH A DIMMER SWITCH. USE RECOMMENDED LUTRON DIMMER SWITCH: SKYLARK S-600, S600P, SF-10P, SF-12P-277, CREDENZA TT300, DVF-103P-277.
2. Connect above wires with Plastic Wire Connectors (a) and wrap the connections with electrical tape.
3. DO NOT test or install with an ON/OFF switch and/or without an attached load.