


RH

PESARO CHANDELIER 48"

PARTS ENCLOSED

- (A) Mounting Strap (1)
- (B) Mounting Loop (1)
- (C) Mounting Screws (2)
- (D) Canopy (1)
- (E) Canopy Ring (1)
- (F) Chain (1)
- (G) Hanging Loop (1)
- (H) Pole Set (1)
- (I) Fixture Body (1)
- (J) Bulbs (6)

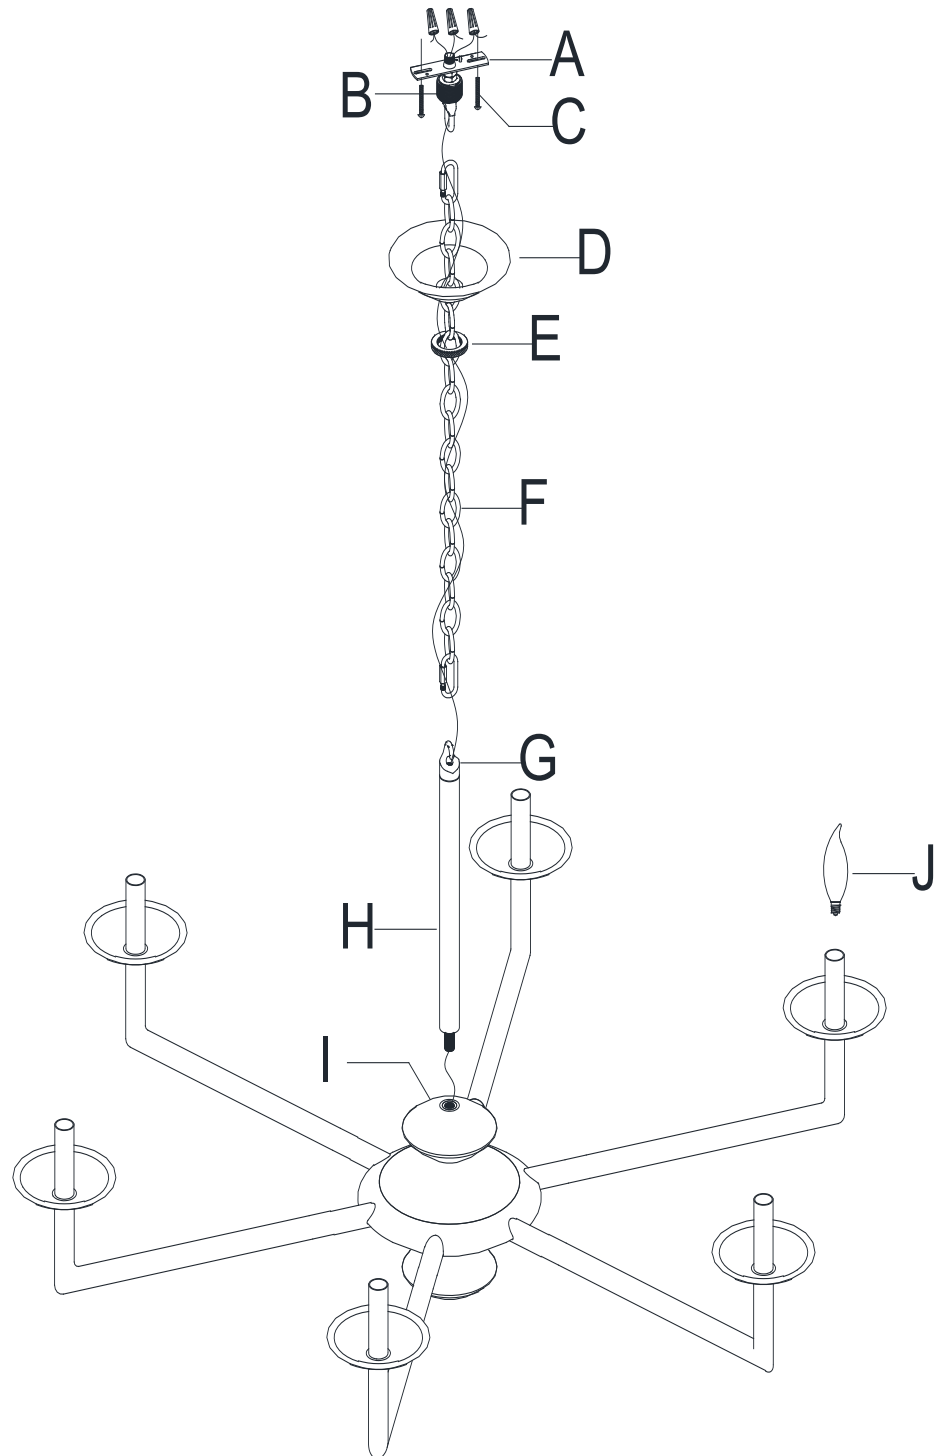

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to six (6) 60-Watt maximum Type CA lightbulbs (40-Watt lightbulbs included) or six (6) 13-Watt compact fluorescent lightbulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND THE HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings. NOTE: WHEN UNBOXING CHANDELIER, BE SURE TO LIFT BY CENTRAL POLE SET (H). LIFTING FIXTURE BY ITS ARMS MAY RESULT IN DAMAGE TO FIXTURE.
2. Feed the wires through the inner rod of Pole Set (H), Hanging Loop (G) and Chain (F).

ASSEMBLY & INSTALLATION CONT.

3. Thread the inner rod of Pole Set (H) into the center hole of Fixture Body (I) by turning in a clockwise direction until tight.
4. Unscrew Canopy Ring (E). Then slide Canopy Ring (E) and Canopy (D) onto Chain (F).
5. Hook Chain (F) to Mounting Loop (B) and Hanging Loop (G) by opening then closing the end link.
6. Attach Mounting Strap (A) to ceiling outlet and secure with Mounting Screws (C).
7. Gently pull the wire from ceiling outlet box and allow the wire to hang. Thread the wire through the center hole of Mounting Strap (A).
8. Attach the fixture ground wire (green) and house ground wire (usually green or bare wire) to wall outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
9. Connect the neutral wire (white) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
10. Connect the hot wire (black) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
11. Slide Canopy (D) to the affixed Mounting Strap (A) and secure with Canopy Ring (E).
12. Insert Bulbs (J) into the sockets.
13. Restore power to outlet box and check operation of fixture.
14. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.