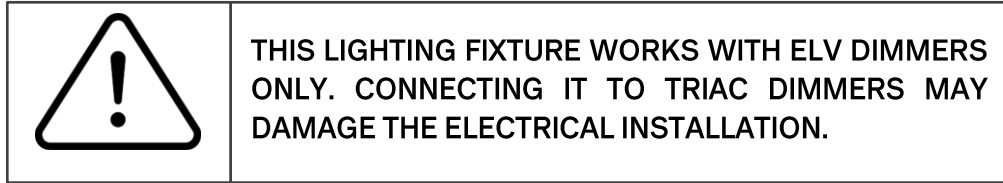


PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. IF YOU ARE UNSURE ABOUT YOUR WALL TYPE OR WHAT MOUNTING METHOD YOU SHOULD USE, CONSULT A QUALIFIED PROFESSIONAL OR YOUR LOCAL HARDWARE STORE.

**PARTS ENCLOSED:**



- (A) Wall plate [1]
- (B) Wall Sconce [1]
- (C) Bolts [3]
- (D) Glass Globe [1]
- (E) Bottom Tube
- (F) 1.6W LED G4 bulb [1]

TOOLS ENCLOSED:

Pair of cotton gloves

NOT INCLUDED:


- Wall anchors
- Screws
- Flat screw-driver
- Drilling machine
- Pencil

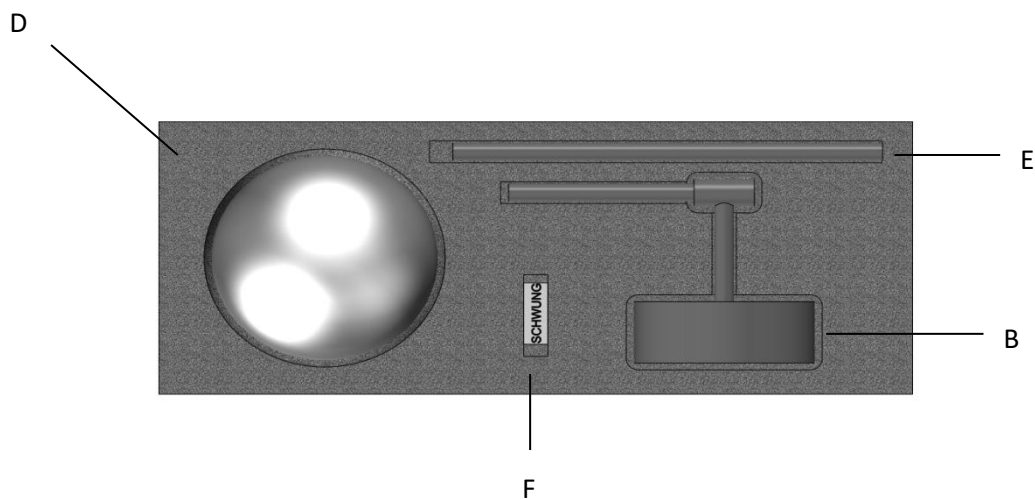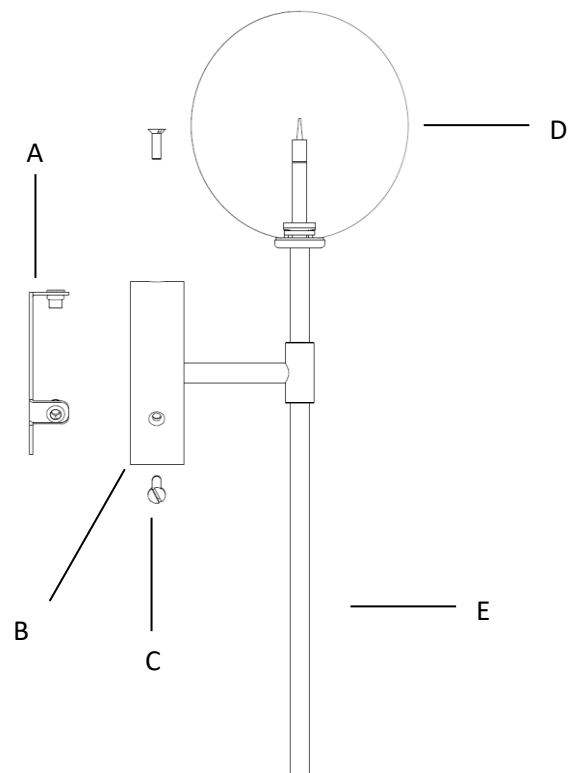



MAKE SURE YOU CUT OFF ELECTRICAL SUPPLY AT THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE COMMENCING ANY WORK


1



After removing the lamp frame from the box, use a flat head screwdriver to unscrew 3 bolts [C] holding the wall plate.


2

CHECK POWER OFF!




Place the wall plate [A] flush against the wall, pull electrical cords through the hole and mark 2-3 anchor spots. Drill holes in the marked spots and place anchors in. **NOTE: Consult your local hardware store for proper anchors.**

3




Pull wires protruding from the wall through the wall plate and screw the anchor screws in. **NOTE: if you have a junction box in the wall, you can use the junction box bolts. The openings on the wall plate fit the standard size.**

4




Move the sconce [B] towards the wall and hold near the wall plate [A] to make electrical connections.

5




Junction boxes may vary depending on location. The diagram on the left shows the most common markings and manner of connecting the cords. **NOTE: We recommend installation by a licensed electrician.**

6



Move the sconce [B] flush with the wall plate [A] and line up the bolt holes. Use a flat screwdriver to screw three bolts [C] in.

7




Screw the bottom tube [E] in. **NOTE: Do not use force as it may cause thread damage.**

8




Carefully insert 1 included 1.6W LED G4 bulb into the slot on the tip of the arm.

9

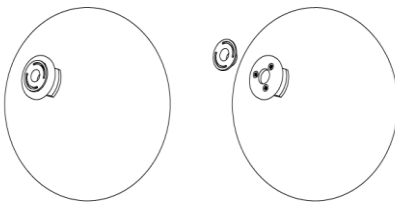

NOTE: Included cotton gloves MUST be worn when handling glass globes. Start mounting the glass by first removing a plastic stopper from the globe to be mounted.

10



Carefully mount the globe onto the sconce tip and screw it on. The assembly is complete. Restore power and enjoy your Schwung Lamp.

SAFETY INSTRUCTIONS:

These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

1. Turn off electricity at the main circuit breaker panel before beginning installation.
2. This direct wire fixture must be installed by a certified and licensed electrician. Customers should not attempt to install it on their own.
3. This fixture has been rated for up to one (1) 1.6W max G4 base bulb. To avoid the risk of fire, do not exceed the recommended wattage.
4. If any special control devices are used with this fixture, follow the instructions to assure full compliance with the N.E.C. requirements.
5. This fixture can be used only with a trailing edge dimmer.
6. Junction box for the wall or wall anchors are not included. To select the proper type of junction box / wall anchor based on the material the wall is made of, please contact your local hardware store for assistance. If there are any questions, contact a licensed electrical contractor.

WARNINGS:

- Do not mount or unmount the glass globes if the light bulbs or fixture is hot.
- All wires are connected. Do not remove the sconce light from its packaging by pulling on the power cord, as a bad connection may result.
- Do not use if the electrical wires are damaged.
- To reduce the risk of fire, electrical shock, or personal injury, always turn off light fixture and allow it and the glass globe to cool down prior to replacing a light bulb.
- When mounting the fixture, always use included white gloves.
- Do not touch the bulb when the fixture is turned on. Do not look directly at lit bulbs.
- Keep flammable materials away from lit bulbs.

CLEANING AND MAINTENANCE

NOTE: Make sure you cut off electrical supply to the lamp before commencing cleaning operations.

Component	Maintenance	Tools
Brass frame	Clean every month using a soft cloth, dampened slightly with water. Make sure the frame is dry before switching it back on.	Soft cloth, water
Glass globes	Clean regularly with a soft dry cloth. Clean only the outside of the globe. When more dirty, use a wet cloth first. Grease can be cleaned with a gentle glass cleaner.	Soft cloth Cotton gloves (!)
Led bulbs	Make sure your power supply is off before changing the bulb. Unscrew the globe where bulb needs replacing. Gently remove the bulb by pulling it out and replace with a LED bulb of the same parameters.	Cotton gloves (!) LED bulbs

NOTE: Please remember solid brass may tarnish over time. This is a natural process. Make sure you follow our guidelines to preserve a great look of RH lighting for years.

TROUBLE SHOOTING

NOTE: Dear client, please be assured our team strives to deliver highest quality products. The handmade nature of the products offers a unique aesthetic experience and allows for small imperfections, which is inherent in crafts. If solutions offered below are not sufficient, please do not hesitate and contact our customer service.

Problem	Possible cause	Action
Tarnishing	Oxidation of brass is a natural process. Although it is lacquered, its color may change slightly over time.	No action is necessary apart from regular cleaning. See the Maintenance section.
Noise	The humming noise normally comes from transformers.	Check electrical connections and make sure the right dimmer is used - ELV.
Globe deformations	Mouth-formed glass globes are beautiful but not perfect. The process leaves a slight deformation at the bottom of the globe.	No action is necessary. All globes undergo a quality check. Should you have any doubts, please send us a photo of the deformed globe and we will act accordingly.