



BOTANIST FLUTE PENDANT 6"
ASSEMBLY & INSTALLATION INSTRUCTIONS
UNITED STATES ENGLISH


BOTANIST FLUTE PENDANT 6"

PARTS INCLUDED

- (A) Wire Nuts (3)
- (B) Mounting Plate (1)
- (C) Mounting Screws (2)
- (D) Swivel Ball (1)
- (E) Canopy (1)
- (F) Collar Ring (1)
- (G) 18" Connection Rods (2)
- (H) 12" Connection Rods (2)
- (I) 6" Connection Rods (2)
- (J) Connectors (5)
- (K) Fixture Body (1)
- (L) Bulb (1)
- (M) 18" Threading Rod with Ring (1)
- (N) 12" Threading Rod with Ring (1)
- (O) 6" Threading Rod with Ring (1)

PARTS NOT INCLUDED

- Medium thread locker (Loctite)
- Electrical tape

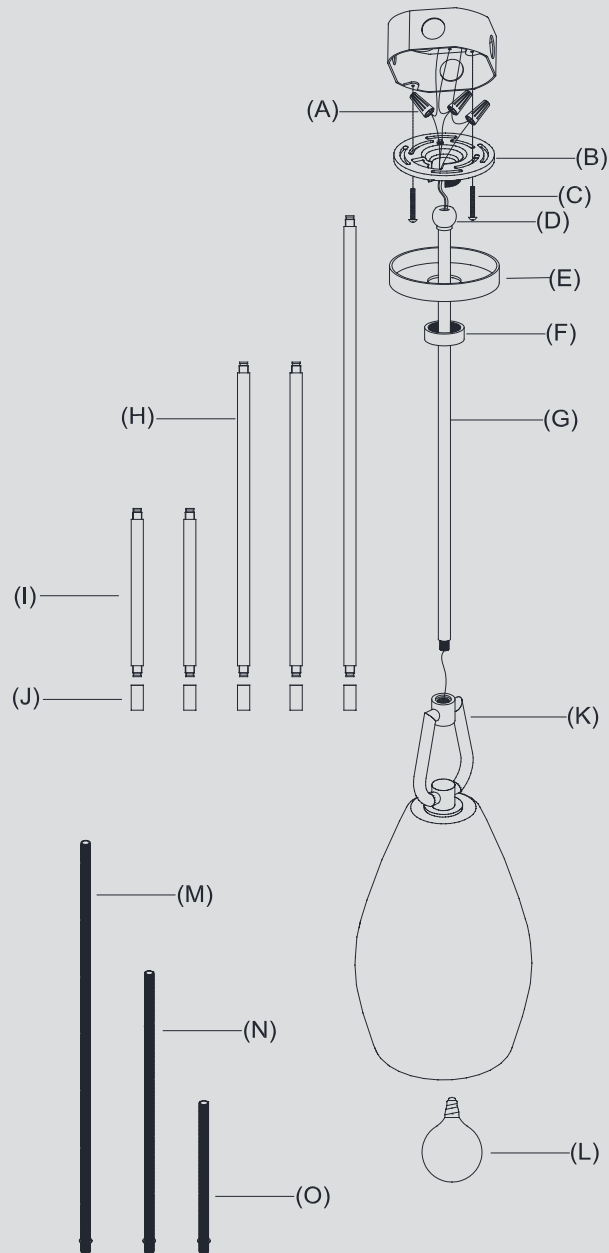

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE OR ALTERNATIVE INSTALLATION METHODS MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES**BULBS**

This fixture has been rated for (1) 40-watt maximum Type G incandescent lightbulb or (1) 9-watt maximum LED lightbulb. To avoid the risk of fire, do not exceed the recommended wattage.

VAULTED-CEILING COMPATIBILITY

This fixture is vaulted-ceiling compatible, up to a maximum ceiling slope of 20 degrees.

DIMMER-SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible, and may only be used with a forward-phase dimmer switch.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

ASSEMBLY AND INSTALLATION**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Remove Mounting Plate (B) from Canopy (E) by loosening Collar Ring (F).
2. Install Mounting Plate (B) to the junction box and secure with Mounting Screws (C).
3. Determine the desired length of the first hanging rod that will be connected to Fixture Loop (K) and select the appropriate initial Threaded Rod with Ring (M) (N) (O).
4. Feed the fixture wires through the Threaded Rod with Ring (M) (N) (O) that was selected in Step 3.
5. Apply a small amount of medium thread locker (Loctite) to the end of Threaded Rod with Ring (M) (N) (O) between the ring and the end of the pole. Do not use an excessive amount – the thread locker should not drip from the end of Threaded Rod with Ring (M) (N) (O).
6. Attach Threaded Rod with Ring (M) (N) (O) to Fixture Loop (K) and tighten by turning in a clockwise direction until hand tight.
7. Select a corresponding Connection Rod (G) (H) (I) according to desired length. Remove the inner threaded rod and discard. Feed the fixture wires through the remaining outer rod.
8. Slide the outer rod over Threaded Rod with Ring (M) (N) (O) installed in Step 6. Secure with a Connector (J).
9. According to the hanging height, feed fixture wires through some or all Connection Rods (G) (H) (I) and Connectors (J).
10. Hold Fixture Body (K) upright. Slide Collar Ring (F) and Canopy (E) down and rest them on Fixture Body (K). NOTE: Slide components down slowly to avoid damages.
11. Hang Swivel Ball (D) to the center of Mounting Plate (B).
12. Cut the extra wires to approximately 10". Be sure to have enough wire left to reach the junction box.
13. Connect fixture ground wire (bare copper) to the building ground wire (usually bare copper) and secure with a Wire Nut (A). Wrap with electrical tape. If there is no building ground wire, wrap the fixture ground wire around the green grounding screw on Mounting Plate (B). NOTE: It is imperative that the fixture is grounded.
14. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using a Wire Nut (A). Wrap with electrical tape.


15. Connect fixture hot wire (black) to the supply hot wire (usually black) using a Wire Nut (A). Wrap with electrical tape. CAUTION: Do not reverse the hot and neutral connections.
16. Make sure all wire connections are tight, then carefully tuck into the junction box.
17. Install Canopy (E) to Mounting Plate (B) and secure with Collar Ring (F).
18. Install Bulb (L) into the socket.
19. Restore power to outlet box and check operation of fixture.
20. Assembly is complete.

HEIGHT ADJUSTMENT INSTRUCTIONS

1. Feed the wires through 6" Connection Rod (I), then thread 6" Connection Rod (I) to the joint of Fixture Body (K).
2. Feed the wires through 12" Connection Rod (H), then thread 12" Connection Rod (H) to 6" Connection Rod (I).
3. Feed the wires through 18" Connection Rod (G), then thread 18" Connection Rod (G) to 12" Connection Rod (H).

ATTENTION: ADJUSTING THE HANG HEIGHT

Any adjustments or alterations to the fixture, cord, or overall hang height that differ from those detailed on RH.com will void the Laboratory Listing and Approvals (UL, ETL, CSA, etc.). If the listing is voided, this means the product may no longer be safe for use as modified. RH does not recommend modifying the product.

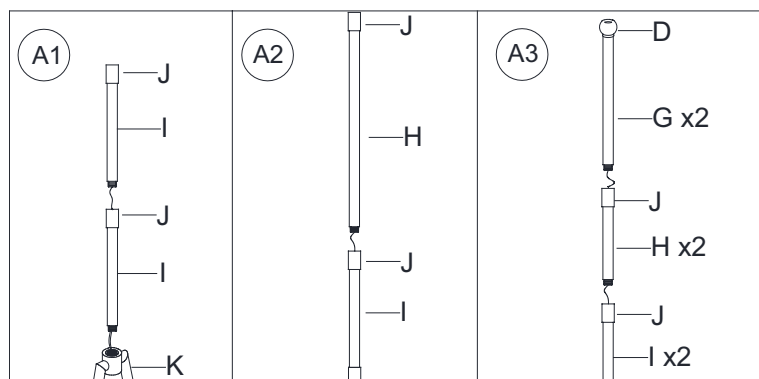

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.




BOTANIST FLUTE PENDANT 8"
ASSEMBLY & INSTALLATION INSTRUCTIONS
UNITED STATES ENGLISH

BOTANIST FLUTE PENDANT 8"

PARTS INCLUDED

- (A) Wire Nuts (3)
- (B) Mounting Plate (1)
- (C) Mounting Screws (2)
- (D) Swivel Ball (1)
- (E) Canopy (1)
- (F) Collar Ring (1)
- (G) 18" Connection Rods (2)
- (H) 12" Connection Rods (2)
- (I) 6" Connection Rods (2)
- (J) Connectors (5)
- (K) Fixture Body (1)
- (L) Bulb (1)
- (M) 18" Threading Rod with Ring (1)
- (N) 12" Threading Rod with Ring (1)
- (O) 6" Threading Rod with Ring (1)

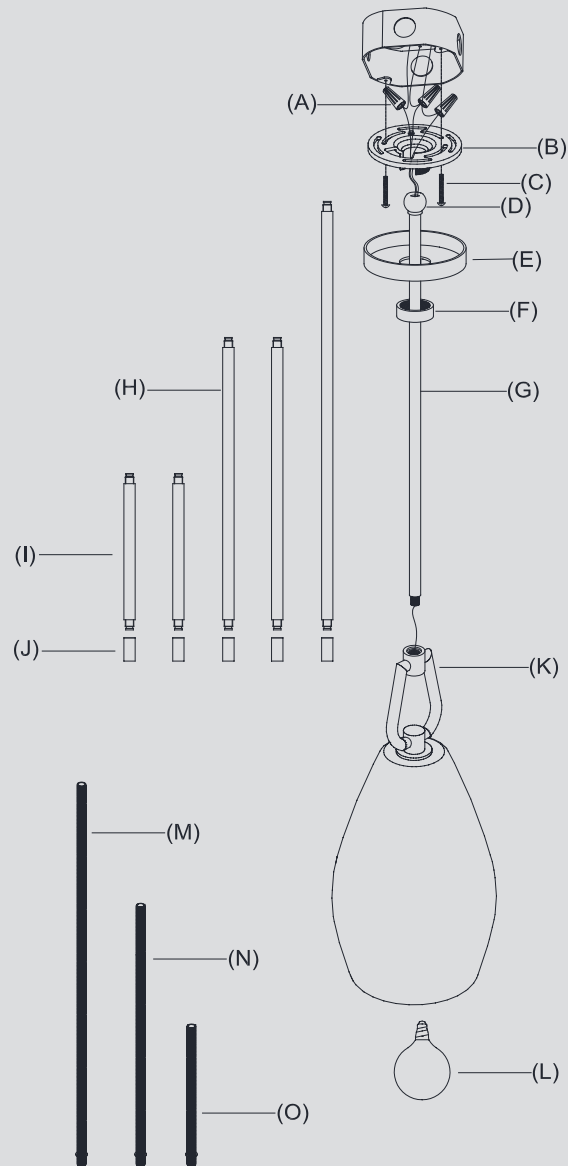

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE OR ALTERNATIVELY, INSTALLATION METHODS MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES**BULBS**

This fixture has been rated for (1) 60-watt maximum Type G incandescent lightbulb or (1) 13-watt maximum LED lightbulb. To avoid the risk of fire, do not exceed the recommended wattage.

VAULTED-CEILING COMPATIBILITY

This fixture is vaulted-ceiling compatible, up to a maximum ceiling slope of 20 degrees.

DIMMER-SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible, and may only be used with a forward-phase dimmer switch.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.


ASSEMBLY AND INSTALLATION**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Remove Mounting Plate (B) from Canopy (E) by loosening Collar Ring (F).
2. Install Mounting Plate (B) to the junction box and secure with Mounting Screws (C).
3. Determine the desired length of the first hanging rod that will be connected to Fixture Body (K) and select the appropriate initial Threaded Rod with Ring (M) (N) (O).
4. Feed the fixture wires through the Threaded Rod with Ring (M) (N) (O) that was selected in Step 3.
5. Apply a small amount of medium thread locker (Loctite) to the end of the Threaded Rod with Ring (M) (N) (O) between the ring and the end of the pole. Do not use an excessive amount – the thread locker should not drip from the end of Threaded Rod with Ring (M) (N) (O).
6. Attach Threaded Rod with Ring (M) (N) (O) to Fixture Body (K) and tighten by turning in a clockwise direction until hand tight.
7. Select a corresponding Connection Rods (G) (H) (I) according to length, remove the inner threaded rod and discard. Feed the fixture wires through the remaining outer rod.
8. Slide the outer rod over Threaded Rod with Ring (M) (N) (O) installed in Step 6. Secure with a connector (J).
9. According to the hanging height, feed fixture wires through some or all Connection Rods (G) (H) (I) and Connectors (J).
10. Hold Fixture Body upright. Slide Collar Ring (F) and Canopy (E) down and rest on Fixture Body (K). NOTE: Slide components down slowly to avoid damages.
11. Hang Swivel Ball (D) to the center of Mounting Plate (B).
12. Cut the extra wires to approximately 10". Be sure to have enough wire left to reach the junction box.
13. Connect fixture ground wire (bare copper) to the building ground wire (usually bare copper) and secure with a Wire Nut (A). Wrap with electrical tape. If there is no building ground wire, wrap the fixture ground wire around the green grounding screw on Mounting Plate (B). NOTE: It is imperative that the fixture is grounded.
14. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using a Wire Nut (A). Wrap with electrical tape.

15. Connect fixture hot wire (black) to the supply hot wire (usually black) using a Wire Nut (A). Wrap with electrical tape. CAUTION: Do not reverse the hot and neutral connections.
16. Make sure all wire connections are tight, then carefully tuck into the junction box.
17. Install Canopy (E) to Mounting Plate (B) and secure with Collar Ring (F).
18. Install Bulb (L) into the socket.
19. Restore power to outlet box and check operation of fixture.
20. Assembly is complete.

HEIGHT ADJUSTMENT INSTRUCTIONS

1. Feed the wires through 6" Connection Rod (I), then thread 6" Connection Rod (I) to the joint of Fixture Body (K).
2. Feed the wires through 12" Connection Rod (H), then thread 12" Connection Rod (H) to 6" Connection Rod (I).
3. Feed the wires through 18" Connection Rod (G), then thread 18" Connection Rod (G) to 12" Connection Rod (H).

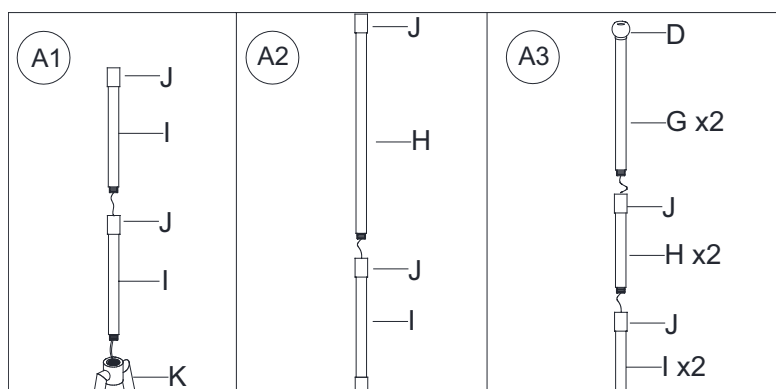

ATTENTION: ADJUSTING THE HANG HEIGHT

Any adjustments or alterations to the fixture, cord, or overall hang height that differ from those detailed on RH.com will void the Laboratory Listing and Approvals (UL, ETL, CSA, etc.). If the listing is voided, this means the product may no longer be safe for use as modified. RH does not recommend modifying the product.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.




BOTANIST FLUTE PENDANT 9"
ASSEMBLY & INSTALLATION INSTRUCTIONS
UNITED STATES ENGLISH

**BOTANIST FLUTE
PENDANT 9"**

PARTS INCLUDED

- (A) Wire Nuts (3)
- (B) Mounting Plate (1)
- (C) Mounting Screws (2)
- (D) Swivel Ball (1)
- (E) Canopy (1)
- (F) Collar Ring (1)
- (G) 18" Connection Rods (2)
- (H) 12" Connection Rods (2)
- (I) 6" Connection Rods (2)
- (J) Connectors (5)
- (K) Fixture Body (1)
- (L) Bulb (1)
- (M) 18" Threading Rod with Ring (1)
- (N) 12" Threading Rod with Ring (1)
- (O) 6" Threading Rod with Ring (1)

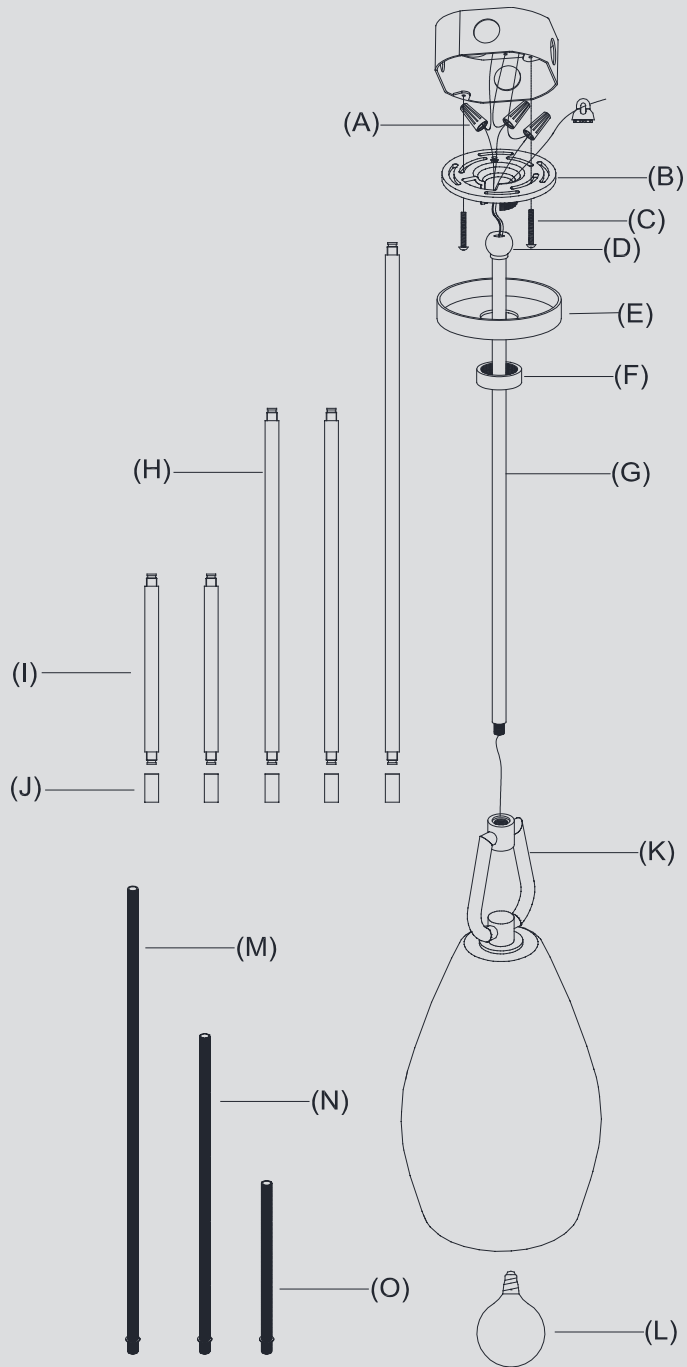

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE OR ALTERNATIVE INSTALLATION METHODS MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES**BULBS**

This fixture has been rated for (1) 60-watt maximum Type G incandescent lightbulb or (1) 13-watt maximum LED lightbulb. To avoid the risk of fire, do not exceed the recommended wattage.

VAULTED-CEILING COMPATIBILITY

This fixture is vaulted-ceiling compatible, up to a maximum ceiling slope of 20 degrees.

DIMMER-SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible, and may only be used with a forward phase dimmer switch.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.




WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

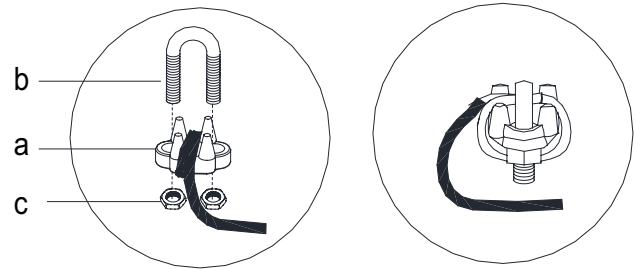INSTALLING THE SAFETY CABLE:

ASSEMBLY AND INSTALLATION

**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM
THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Remove Mounting Plate (B) from Canopy (E) by loosening Collar Ring (F).
2. Install Mounting Plate (B) to the junction box and secure with Mounting Screws (C).
3. Determine the desired length of the first hanging rod that will be connected to Fixture Loop (K) and select the appropriate initial Threaded Rod with Ring (M) (N) (O).
4. Feed the fixture wires through the Threaded Rod with Ring (M) (N) (O) that was selected in Step 3.
5. Apply a small amount of medium thread locker (Loctite) to the end of the Threaded Rod with Ring (M) (N) (O) between the ring and the end of the pole. Do not use an excessive amount – the thread locker should not drip from the end of Threaded Rod with Ring (M) (N) (O).
6. Attach Threaded Rod with Ring (M) (N) (O) to Fixture Body (K) and tighten by turning clockwise until hand tight.
7. Select a corresponding Connection Rods (G) (H) (I) according to length, remove the inner threaded rod, and discard. Feed the fixture wires through the remaining outer rod.
8. Slide the outer rod over Threaded Rod with Ring (M) (N) (O) installed in Step 6. Secure with a connector (J).
9. According to the hanging height, feed fixture wires through some or all Connection Rods (G) (H) (I) and Connectors (J).
10. Hold Fixture Body (K) upright. Slide Collar Ring (F) and Canopy (E) down and rest on Fixture Body (K). NOTE: Slide components down slowly to avoid damages.
11. Hang Swivel Ball (D) to the center of Mounting Plate (B).
12. Run safety cable through hole on back of Mounting Plate (B). Wrap the safety cable around the saddle (a), and secure with U-bolt (b) and hex nuts (c). See the diagram on previous page.
13. Cut the extra wires to approximately 10". Be sure to have enough wire left to reach the junction box.
14. Connect fixture ground wire (bare copper) to the building ground wire (usually bare copper) and secure with a Wire Nut (A). Wrap with electrical tape. If there is no building ground wire, wrap the fixture ground wire around the green grounding screw on Mounting Plate (B). NOTE: It is imperative that the fixture is grounded.
15. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using a Wire Nut (A). Wrap with electrical tape.
16. Connect fixture hot wire (black) to the supply hot wire (usually black) using a Wire Nut (A). Wrap with electrical tape. CAUTION: Do not reverse the hot and neutral connections.
17. Make sure all wire connections are tight, then carefully tuck into the junction box.
18. Install Canopy (E) to Mounting Plate (B) and secure with Collar Ring (F).
19. Install Bulb (L) into the socket.
20. Restore power to outlet box and check operation of fixture.
21. Assembly is complete.

HEIGHT ADJUSTMENT INSTRUCTIONS

1. Feed the wires through 6" Connection Rod (I), then thread 6" Connection Rod (I) to the joint of Fixture Body (K).
2. Feed the wires through 12" Connection Rod (H), then thread 12" Connection Rod (H) to 6" Connection Rod (I).
3. Feed the wires through 18" Connection Rod (G), then thread 18" Connection Rod (G) to 12" Connection Rod (H).

ATTENTION: ADJUSTING THE HANG HEIGHT

Any adjustments or alterations to the fixture, cord, or overall hang height that differ from those detailed on RH.com will void the Laboratory Listing and Approvals (UL, ETL, CSA, etc.). If the listing is voided, this means the product may no longer be safe for use as modified. RH does not recommend modifying the product.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

