


RESTORATION HARDWARE

LARGE DUOMO PENDANT

PARTS ENCLOSED

- (A) Mounting Strap (1)
- (B) Mounting Screw (2)
- (C) Nipple (1)
- (D) Chain Mounting Loop (1)
- (E) Canopy (1)
- (F) Canopy Ring (1)
- (G) Chain (1)
- (H) Top Loop (1)
- (J) Metal Tabs (32)
- (K) Set Screws (32)
- (L) Lantern Box (1)
- (M) (N) Glass Panels (5)
- (O) Door (1)

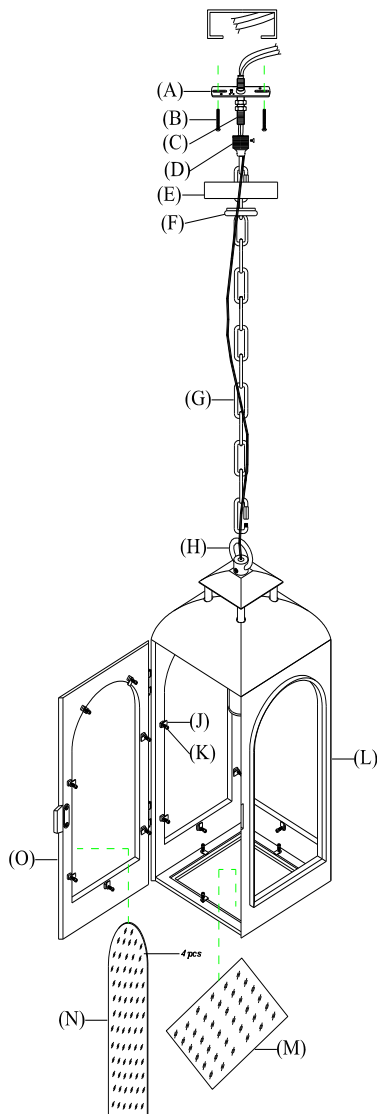

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to one (1) 100-watt maximum Type A light bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. Do not connect electricity until your lamp is fully assembled.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.
4. Do not touch bulb when fixture is turned on or look directly at lit bulb.
5. Keep flammable materials away from lit bulb.

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the pendant will be installed.
3. To install glass panel (M) and (N) to each frame of lantern box (L), removing all metal tabs (J) by unscrewing set screws (K) and set aside. Insert a glass panel into one frame and insert the second glass panel to the next frame, replace metal tabs (J) and followed with set screws (K) to secure glass panels (M) and (N) to the frame.
4. Repeat the procedure for the rest glass panels.
5. Screw top loop (H) with chain (G) on top of lantern box (L).
6. Feed wire through chain (G) and mounting loop (D).
7. Slip canopy ring (F) and canopy (E) over the upper end of the chain. Open the end link of the chain and lift the lantern box to attach to the mounting loop and secure the link.
8. Attach mounting strap (A) to mounting outlet box with mounting screws (B) and insert top thread nipple (C) in mounting strap (A).
9. Attach chain mounting loop (D) to thread nipple (C).
10. Attach the fixture ground wire (bare wire) to the ground wire from the outlet box (usually green or bare wire) with a plastic wire connector and wrap the connection with electrical tape.
11. Connect the hot wire (smooth wire) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape.
12. Connect the neutral wire (ridges molded wire) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
13. Tuck these wire connections neatly into the ceiling outlet box.
14. Raise the canopy (E) to the ceiling and screw canopy ring (F) onto the mounting loop (D) to secure.
15. Open the door (O) and insert recommended light bulb into socket.
16. Closed the door (O).
17. Restore power to the junction box and test the pendant fixture.
18. Assembly is complete.

CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.