



CANNELE ROUND CHANDELIER 60"


ASSEMBLY & INSTALLATION INSTRUCTIONS

ENGLISH

CANNELE ROUND CHANDELIER 60"

PARTS INCLUDED

- (A) Mounting Plate (1)
- (B) Canopy Screws (3)
- (C) Canopy (1)
- (D) Flat-Head Screws (3)
- (E) Box Cap (1)
- (F) Hex Nuts (5)
- (G) Wiring Box (1)
- (H) T- Wrench (1)
- (I) Mounting Screws (2)
- (J) Rod Connectors (32)
- (K) 6" Connection Rods (8)
- (L) 12" Connection Rods (8)
- (M) 18" Connection Rods (8)
- (N) Fixture Body (1)
- (O) Glass Tubes (12)
- (P) Bulbs (12)
- (Q) Sockets (12)
- (R) Wire Nuts (3)

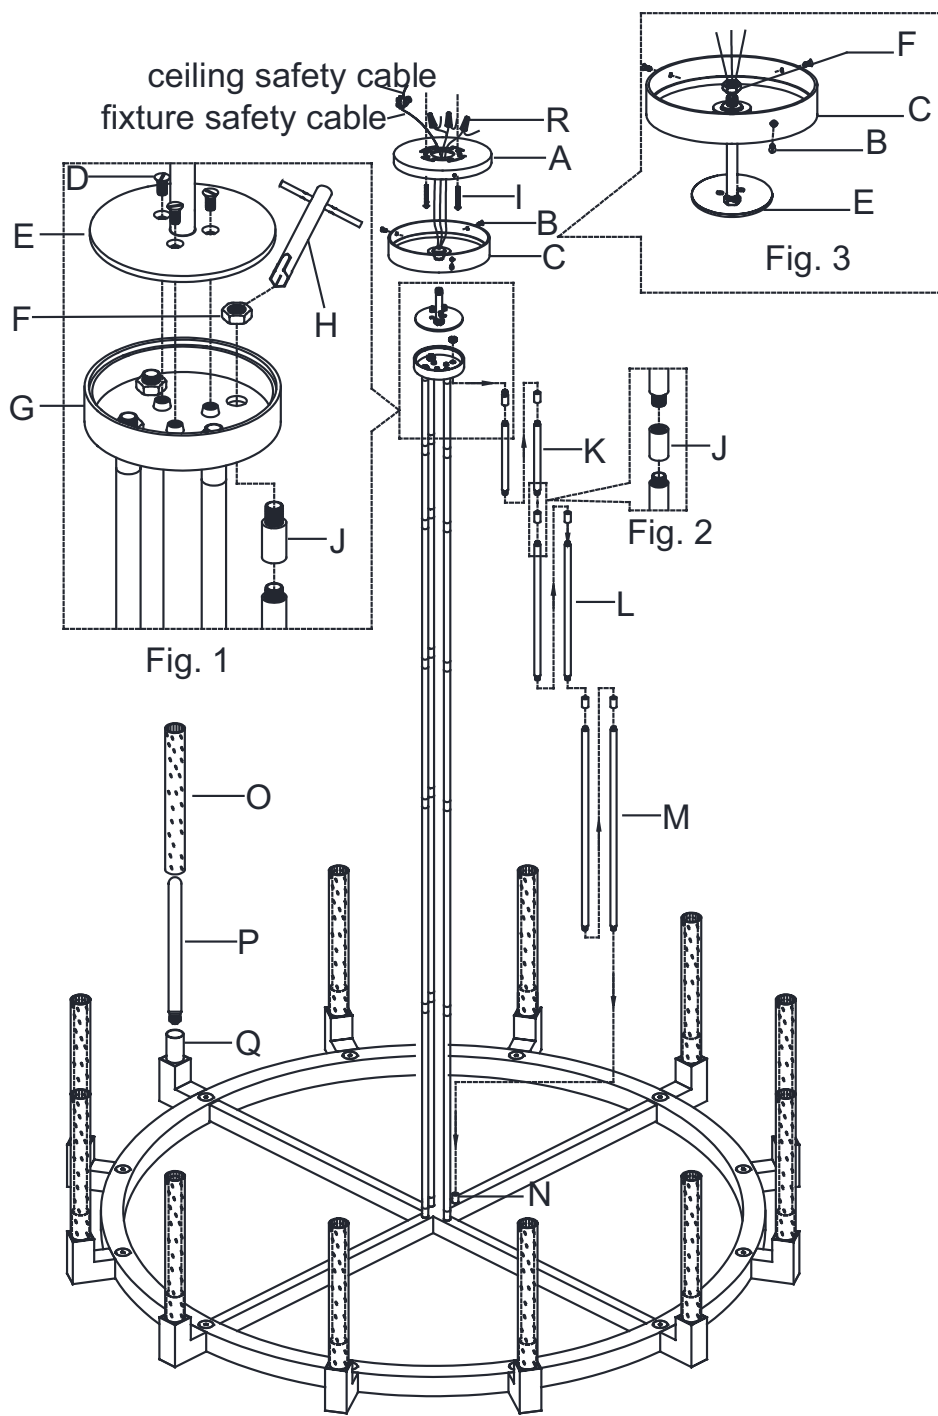

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE, OR ALTERNATIVE, INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES**BULBS**

This fixture has been rated for twelve (12) 40-watt maximum Type T bulbs or twelve (12) 5.5-watt SBLED bulbs. To avoid the risk of fire, do not exceed the recommended wattage.

VAULTED CEILING COMPATIBILITY

This fixture is vaulted-ceiling compatible up to a maximum ceiling slope of 20 degrees.

DIMMER SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible and may only be used with a forward-phase dimmer switch.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch or look directly at the bulbs when fixture is illuminated. Keep flammable materials away from lit bulbs.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.


WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE

SAFETY CABLE INSTALLATION

1. Run safety cable through junction box and around structural member of building.
2. Wrap the safety cable around the Saddle (a) and secure with U-Bolt (b) and Hex Nuts (c).

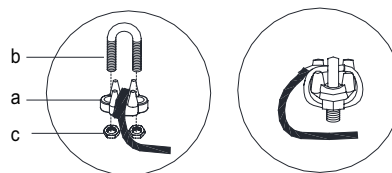

ASSEMBLY AND INSTALLATION**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Determine the hanging length of the fixture. Connect some or all hanging Connection Rods (K) (L) (M) and Rod Connectors (J) according to the height needed.
3. Feed the fixture wires through Connection Rods (K) (L) (M) and Connectors (J).
4. Remove Box Cap (E) from Wiring Box (G) by removing Flat-Head Screws (D).
5. Remove Rod Connectors (J) from the bottom of Wiring Box (G) by removing Hex Nuts (F) using T-Wrench (H).
6. Attach Rod Connectors (J) to Connection Rods (K) (L) (M).
7. Re-attach Rod Connectors (J) to Wiring Box (G) and secure with Hex Nuts (F). Tighten using T-Wrench (H).
8. Feed the wires and safety cable through the top rod of Box Cap (E).
9. Re-attach Box Cap (E) to Wiring Box (G) by aligning the three holes and secure with Flat-Head Screws (D).
10. Remove Mounting Plate (A) from Canopy (C) by unscrewing Canopy Screws (B).
11. Attach Mounting Plate (A) to the ceiling and secure with Mounting Screws (I) or other proper fasteners from your local hardware store.
12. Unscrew Hex Nut (F) from the top of Canopy (C). Feed the wires and safety cable through the center hole of Canopy (C).
13. Screw the ball swivel from inside of Canopy (C) onto the top rod of Box Cap (E). Secure by turning Canopy (C) in a clockwise direction until the threading rod has passed through the center hole.
14. Secure by screwing Hex Nut (F) into the top of Canopy (C). (Refer to Fig. 3 on Page 1).
15. Connect the fixture safety cable to the ceiling safety cable. (Refer to the diagram on the previous page).
16. Connect the fixture ground wire to the house ground wire (usually bare or green) from the ceiling junction box using a Wire Nut (R). If your house does not have a ground wire, attach the fixture ground wire to the green grounding screw on Mounting Plate (A). IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
17. Connect the fixture neutral wire to the neutral wire (usually white) from the ceiling junction box using a Wire Nut (R).
18. Connect the fixture hot wire to the hot wire (usually black) from the ceiling junction box using a Wire Nut (R). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
19. Attach Canopy (C) to Mounting Plate (A) and secure with Canopy Screws (B).
20. Screw Bulbs (P) into each Socket (Q).
21. Carefully slide Glass Tubes (O) onto each Socket (Q).
22. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture.

Wipe clean with a soft, dry cloth.

HANG HEIGHT ADJUSTMENT INSTRUCTIONS

1. Feed wires through all or some of Connection Rods (K) (L) (M) based on desired hang height. Use Rod Connectors (J) to attach each Connection Rod.
2. Thread the bottom-most Connection Rod into the joint of Fixture Body (N). Secure with Hex Nuts (F) using T-Wrench (H) to tighten.
3. Thread the top-most Connection Rod into the threaded joint of Wiring Box (G) using Hex Nuts (F) and tighten with T-Wrench (H).

ATTENTION: ADJUSTING THE HANG HEIGHT

Any adjustments or alterations to the fixture, cord, or overall hang height that differ from those detailed on RH.com will void the Laboratory Listing and Approvals (UL, ETL, CSA, etc.). If the listing is voided, this means the product may no longer be safe for use as modified. RH does not recommend modifying the product.