
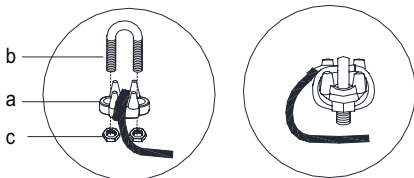


CANNELE TORCH SCONCE 72"

PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Mounting Screws (2)
- (C) Wire Nuts (3)
- (D) Lamp Base (1)
- (E) Set Screws (2)
- (F) Shade (1)
- (G) Screwdriver (1)
- (H) Metal Anchor (1)
- (I) Connector (1)
- (J) Wood Screw (1)
- (K) Set Screw (1)
- (L) Bulb (1)

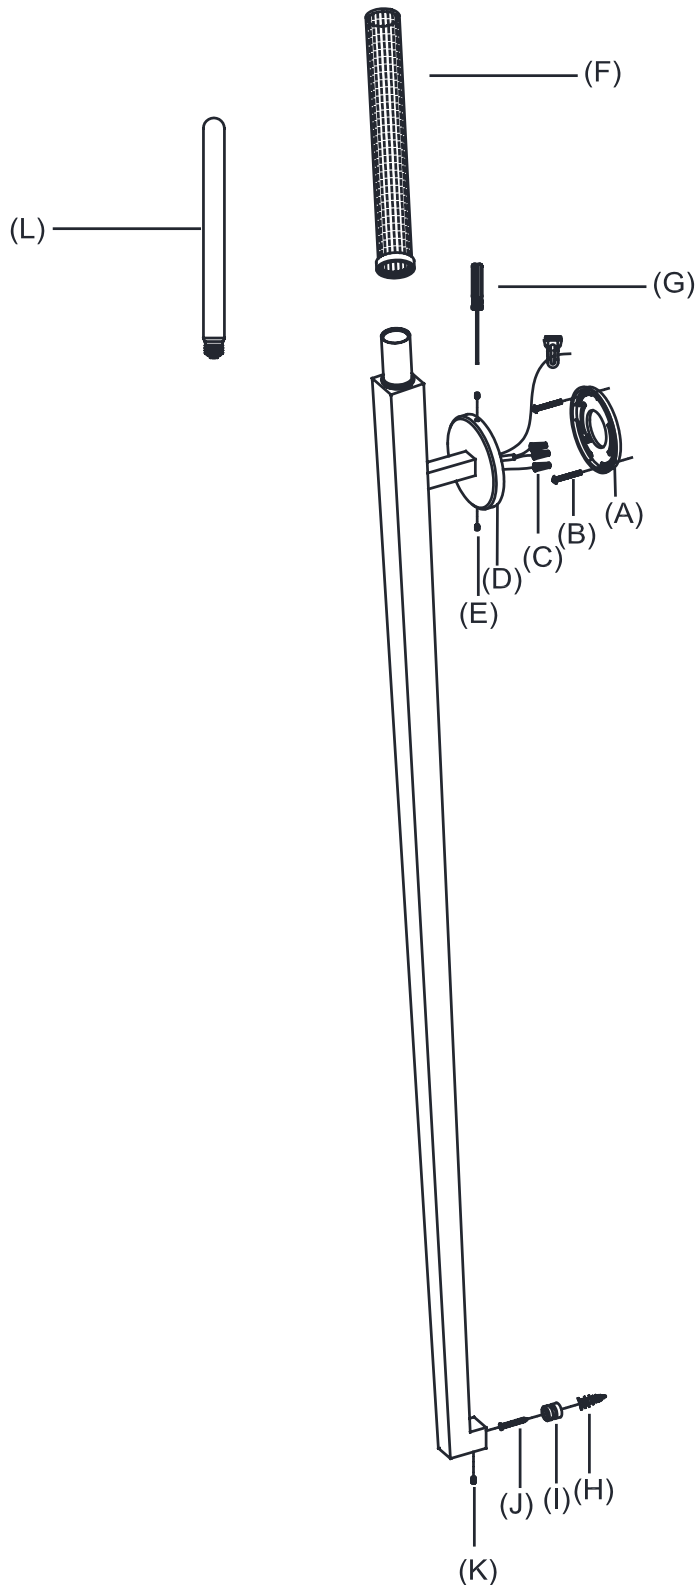

Install safety cable:

1. Wrap the safety cable into the slot hole on the mounting plate.
2. Wrap the safety cable around the saddle (a).
3. Insert U-bolt clip (b) into the saddle (a) and secure with the nuts (c).

CANNELE TORCH SCNCE 72"

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for one (1) 60-watt maximum Type A lightbulb or one (1) 13-watt compact fluorescent lightbulb. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Remove Mounting Plate (A) from Lamp Base (D) by unscrewing Set Screw (E) using Screwdriver (G).
3. Install Mounting Plate (A) to the wall outlet box and secure with Mounting Screws (B).
4. Mark a location for Metal Anchor (H) and drill a hole for Metal Anchor (H), then install Metal Anchor (H) to the hole.

ASSEMBLY & INSTALLATION CONT.

5. Install Connector (I) to Metal Anchor (H) and secure with Wood Screw (J).
6. Connect the safety steel wire from the fixture to the safety cable from the ceiling. Refer to the illustration on previous page.
7. Attach the fixture ground wire (bare) to the ground wire from the outlet box (usually green) with a Wire Nut (C) and wrap the connection with electrical tape.
8. Connect the hot wire (black wire) to the hot outlet box wire (usually black) with a Wire Nut (C) and wrap the connection with electrical tape.
9. Connect the neutral wire (white) to the neutral outlet wire (usually white) with a Wire Nut (C) and wrap the connection with electrical tape.
10. Install Lamp Base (D) to Mounting Plate (A) and secure with Set Screws (E). Tighten with Screwdriver (G).
11. Join the bottom of fixture body to Connector (I), then tighten Set Screw (K).
12. Insert Bulb (L) into the socket.
13. Install Shade (F) over Bulb (L).
14. Restore power to outlet box and check operation of fixture.
15. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.