


RESTORATION HARDWARE

Versailles Wood Teardrop Chandelier S.

PARTS ENCLOSED:

- (A) Bulb (not included)
- (B) Chain
- (C) Set ring
- (D) Canopy plate
- (E) Mounting screw 2x
- (F) Mounting plate
- (G) Plastic wire cap connector

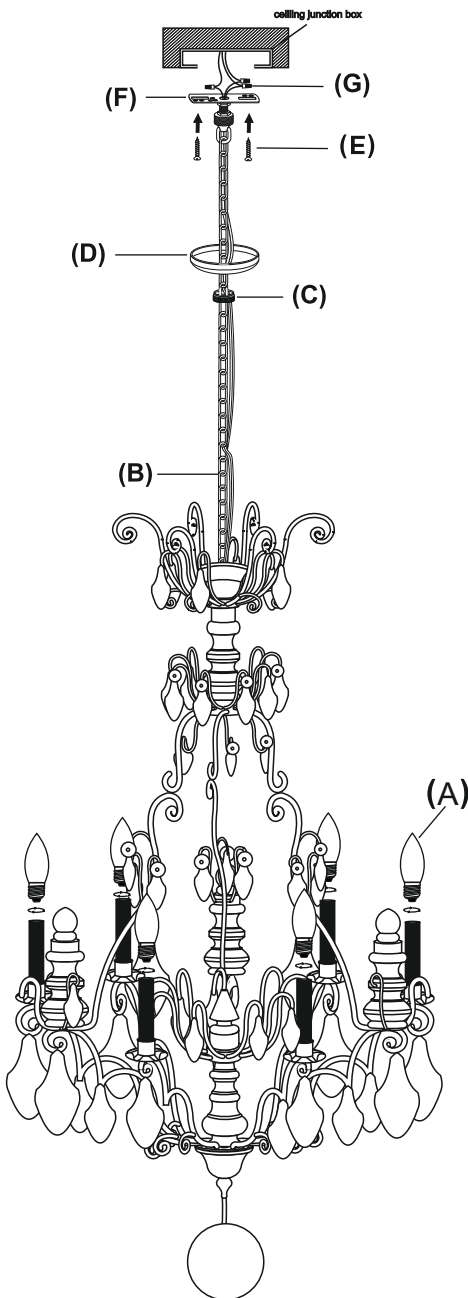

IMPORTANT SAFETY INSTRUCTIONS:

- Professional installation is recommended.
- For your safety, it is strongly recommended that two people hang the lighting fixture.
- These instructions are provided for your safety. It is important that they are read carefully and completely before assembling fixture.
- This fixture has been rated for up to (6) **60-watt maximum TYPE B** standard incandescent light bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

- To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- Keep flammable materials away from lit bulb.**
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**

TO ASSEMBLE:

1. **SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.**
2. Carefully unpack all fixture parts and hardware and lay out on a clear workspace.
3. Fasten the Mounting Plate (F) to the ceiling junction box using the 2 Mounting Screws (E). Tighten screws with screwdriver.
4. Carefully inspect the three wires coming from the cord one is black that is live. 2nd is white that is neutral wire. 3rd wire is green that is earth wire.
5. Connect the earth wire from the fixture to the earth wire of the junction box (Usually green or bare wire).
6. Fasten each together with a plastic cap connector (G) & wrap the connector with the electrical tape. Be sure that no wire strands are exposed. **IT IS IMPERATIVE THAT THE JUNCTION BOX IN YOUR HOME BE PROPERLY GROUNDED!**
7. Connect the neutral fixture wire to the neutral junction box wire (usually white insulation). Fasten each together with a plastic Wire Cap Connector (G) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black insulation). Fasten each together with a plastic Wire Cap Connector (G) and wrap the connection with electrical tape. Be sure no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
8. Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black insulation). Fasten each together with a plastic Wire Cap Connector (G) and wrap the connection with electrical tape. Be sure no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.** Gently tuck the wire connections neatly into the ceiling junction box. Tight the Canopy Plate (D) over the Mounting Plate (F) with the help of set ring (C)
9. Insert (6)-watt maximum TYPE B standard incandescent light bulb (not included) into socket. **DO NOT EXCEED SPECIFIED WATTAGE.**
11. Restore power to the ceiling junction box (J-box) and test fixture.
12. Assembly is complete.

CARE INSTRUCTIONS:

- Wipe clean with soft, dry cloth.
- Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.