
RESTORATION HARDWARE

SMALL SPUTNIK PENDANT

PARTS ENCLOSED

- (A) Mounting plate (1)
- (B) Mounting screws (2)
- (C) Base screws (3)
- (D) Canopy base (1)
- (E) Threaded ring (1)
- (F) (G) (H) Lamp poles (4)
- (J) Lamp pole body (1)
- (K) Light bulbs (12)

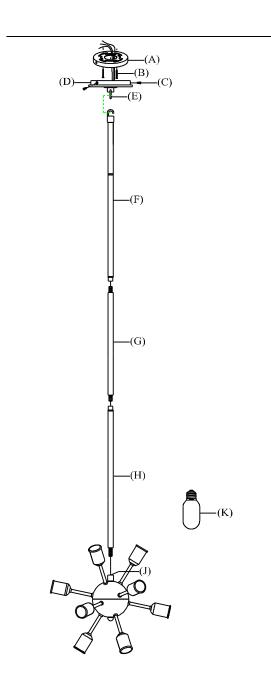

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN. This fixture has been rated for up to twelve (12) 40-watt maximum light bulbs (included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

- 1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
- 2. Do not connect electricity until your lamp is fully assembled.
- 3. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.
- 4. Do not touch bulb when fixture is turned on or look directly at lit bulb.
- 5. Keep flammable materials away from lit bulb.

TO ASSEMBLE:

- 1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
- 2. Carefully remove all parts from the box and remove all plastic covering.
- 3. Remove mounting plate (A) from canopy base (D) by removing base screws (C).
- 4. Affix mounting plate (A) to ceiling outlet box with mounting screws (B) provided.
- 5. Gently pull the wiring from the ceiling outlet box and allow the wires to hang. Thread the wires through the center hole in the mounting plate (A).
- 6. Attach lamp pole (H) to top opening of lamp pole body (J) by turning (H) in clockwise direction.
- 7. Attach lamp pole (G) to top opening of lamp pole (H) by turning (G) in clockwise direction.
- 8. Attach lamp pole (F) to top opening of lamp pole (G) by turning (F) in clockwise direction.
- 9. Attach the fixture ground wire and house ground wire (bare wire) to ceiling outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
- 10. Connect the neutral wire (ridges molded wire) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
- 11. Connect the hot wire (smooth wire) to the outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
- 12. Hook the lamp pole (F) to threaded ring (E).
- 13. Attach canopy base (D) to mounting plate (A), tighten with base screws (C).
- 14. Insert light bulbs into sockets.
- 15. Restore power to outlet box and check operation of fixture.
- 16. Assembly is complete.

CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.