


PEARL LINEAR CHANDELIER 72" - STANDARD


PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Connection Rods (6)
- (C) Mounting Screws (2)
- (D) Canopy (1)
- (E) Nuts (6)
- (F) Cap Screws (6)
- (G) Caps (33)
- (H) Bulbs (33)
- (I) Crystal Shades (33)
- (J) Screwdriver (1)
- (K) T-Wrench (1)

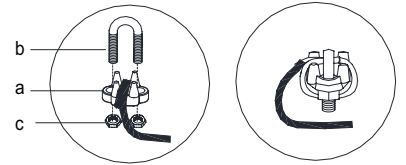

Install safety cable:

1. Wrap the safety cable into the slot hole on the mounting plate.
2. Wrap the safety cable around the saddle (a).
3. Insert U-bolt clip (b) into the saddle (a) and secure with the nuts (c).

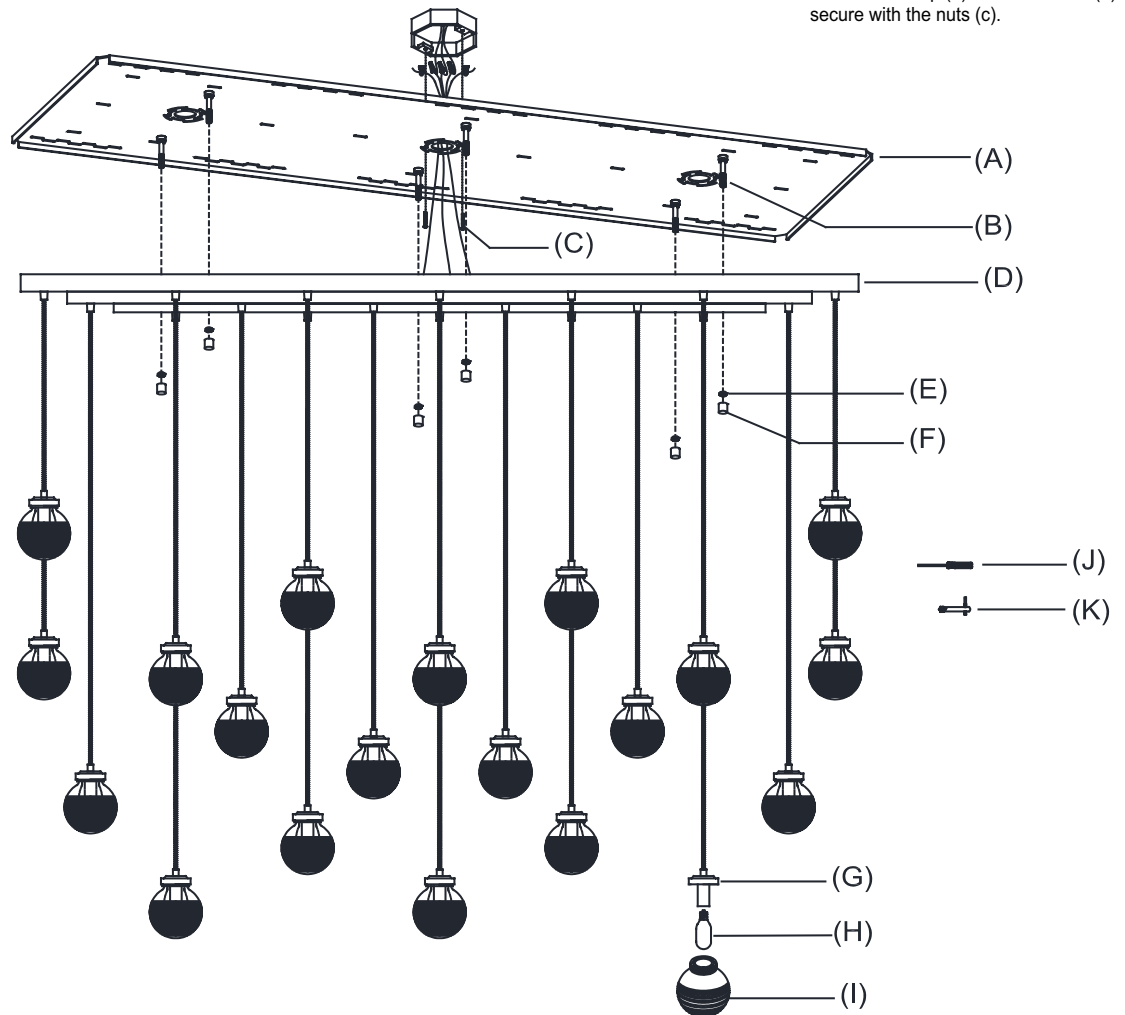

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for thirty-three (33) 25-watt maximum Type T lightbulbs (included) or thirty-three (33) 9-watt compact fluorescent lightbulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch or look directly at the bulbs when fixture is illuminated. Keep flammable materials away from lit bulbs.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Remove Mounting Plate (A) from Canopy (D) by removing Cap Screws (F) and Nuts (E).
3. Attach Mounting Plate (A) to the ceiling and secure with Mounting Screws (C) and other proper fasteners from your local hardware store.

ASSEMBLY & INSTALLATION CONT.


4. Connect the steel safety wire from the fixture and the safety cable from ceiling. Refer to the illustration on previous.
5. Attach the fixture ground wire (green or green/yellow) to the ground wire from the outlet box (usually green insulation or bare wire) with a plastic wire connector and wrap the connection with electrical tape. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
6. Connect the neutral wire from the fixture (white) to the outlet box neutral wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
7. Connect the hot wire (black) to the outlet box hot wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
8. Attach Canopy (D) with the fixture body to the affixed Mounting Plate (A). Let Connection Rods (B) pass through the holes on Canopy (D) and secure with Nuts (E) and Cap Screws (F).
9. Insert Bulbs (H) into each of the sockets.
10. Insert the top threaded portion of Crystal Shades (I) into Caps (G) and turn in a clockwise direction until snug. Do not overtighten. When replacing Bulbs (H), always make sure Crystal Shades (I) are securely tightened to Caps (G) for safety. Note: Do not inadvertently loosen Crystal Shades (I) from Caps (G) when cleaning, or Crystal Shades (I) could fall unexpectedly, creating a safety hazard.
11. Restore power to outlet box and check operation of fixture.
12. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

PEARL LINEAR CHANDELIER 72" - STANDARD


WIRE ADJUSTMENT INSTRUCTION

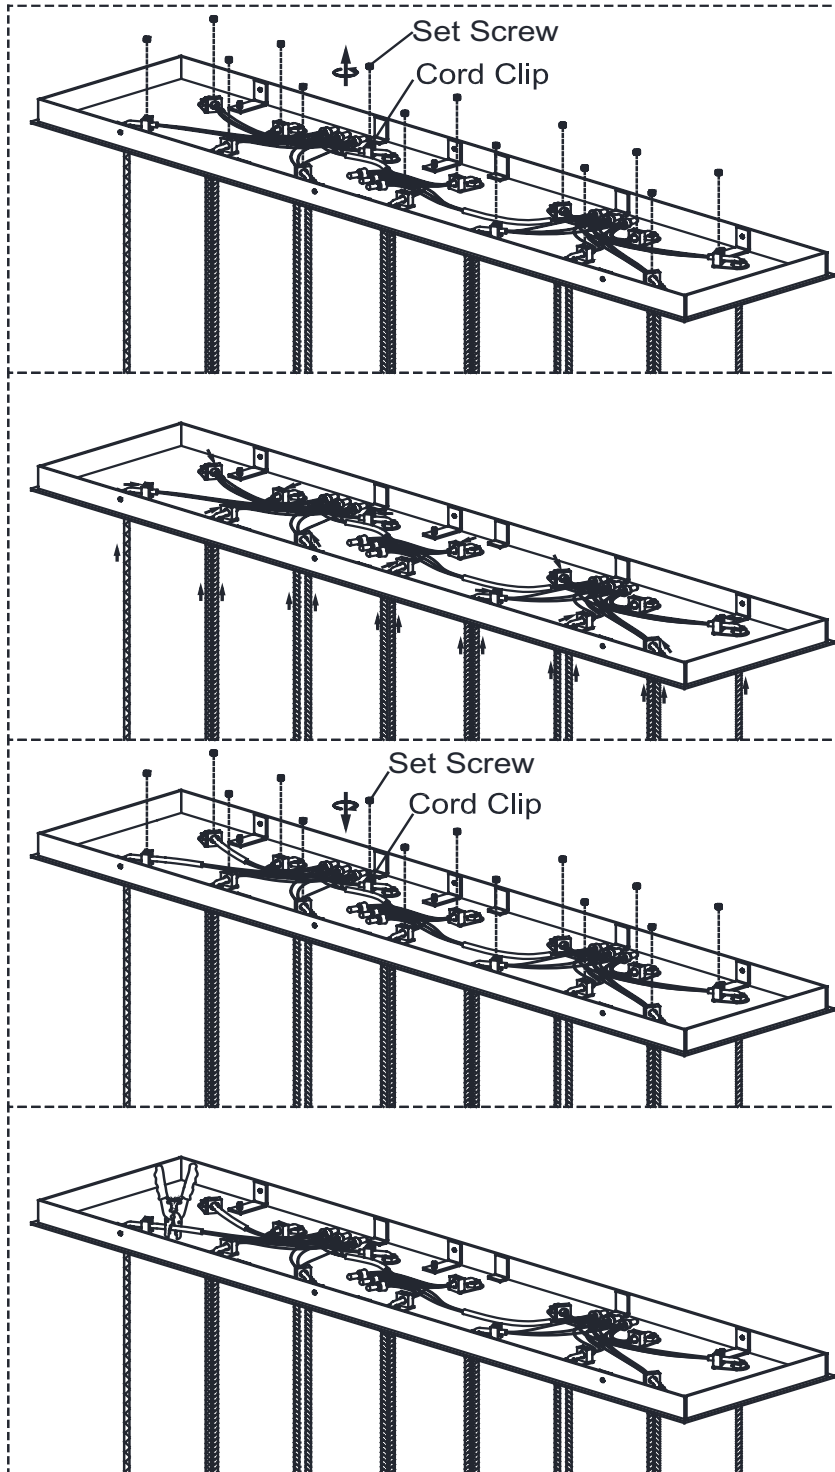

1. Loosen the screw on top of the cord clip.
2. Determine the hanging length for each of the Crystal Shades (I). Pull the hanging cords out through the cord clips to desired length according to your ceiling height (refer to illustrations on following pages).
3. Replace the screw and tighten to lock hanging cord in place.
4. Cut off the excess wire with a wire cutter.

PEARL LINEAR CHANDELIER 72" - STANDARD

WIRE CONNECTION INSTRUCTION

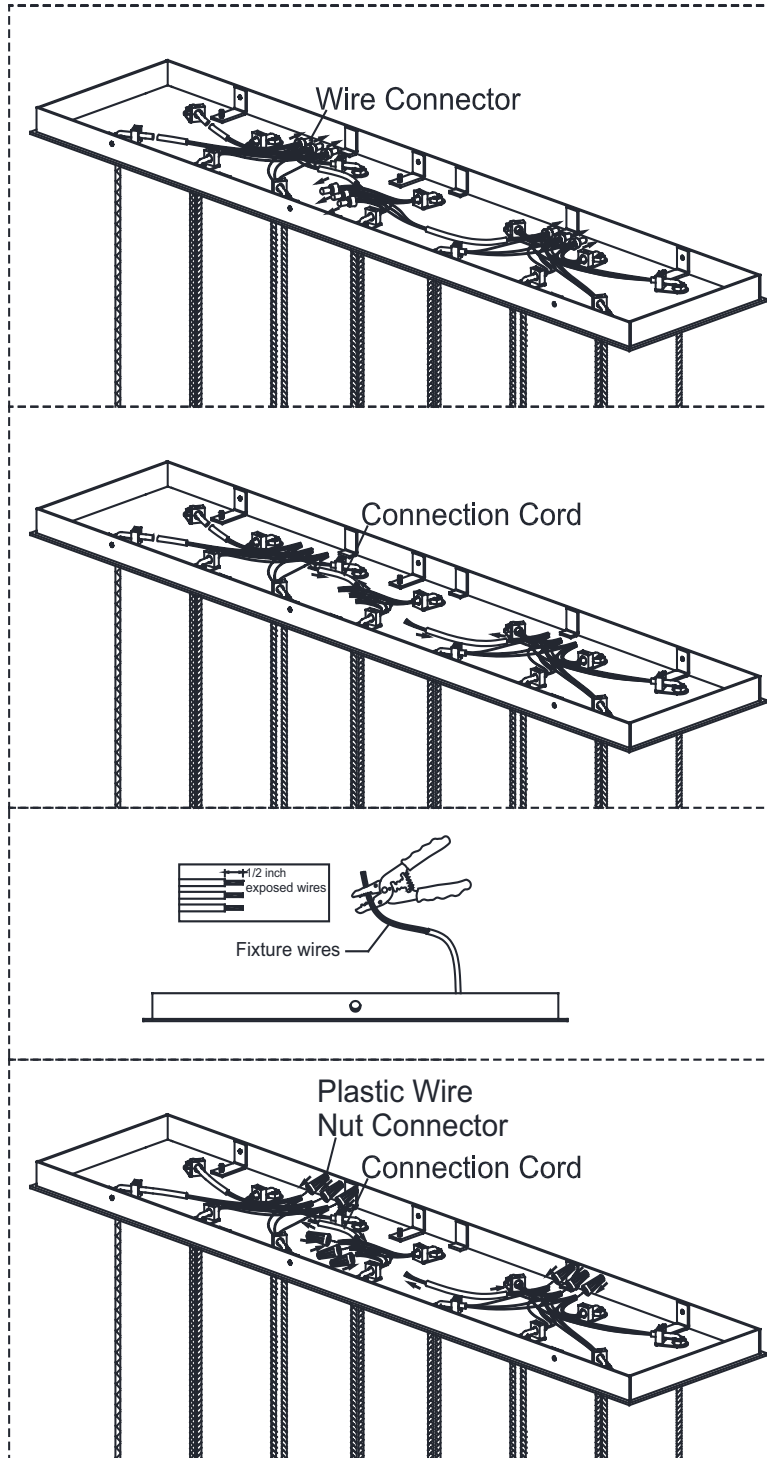

1. Remove the wire connectors using pliers.

2. Take apart the connection cord and set aside.



3. Use a pair of wire strippers to remove about 1/2" of insulation from each wire.

4. Re-connect the wire ends and secure with the plastic nut connectors.

RH

PEARL LINEAR CHANDELIER 72" - STANDARD




8' CEILING HEIGHT

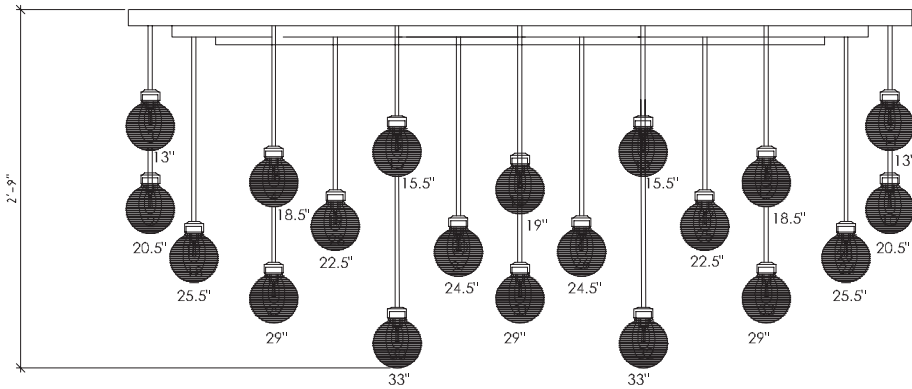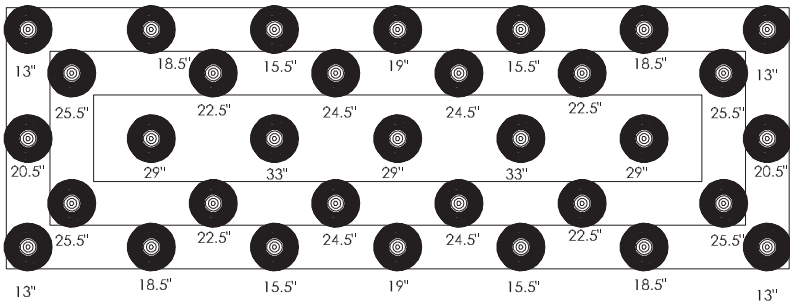

RH

PEARL LINEAR CHANDELIER 72" - STANDARD




9' CEILING HEIGHT

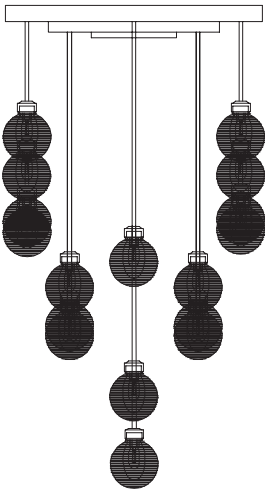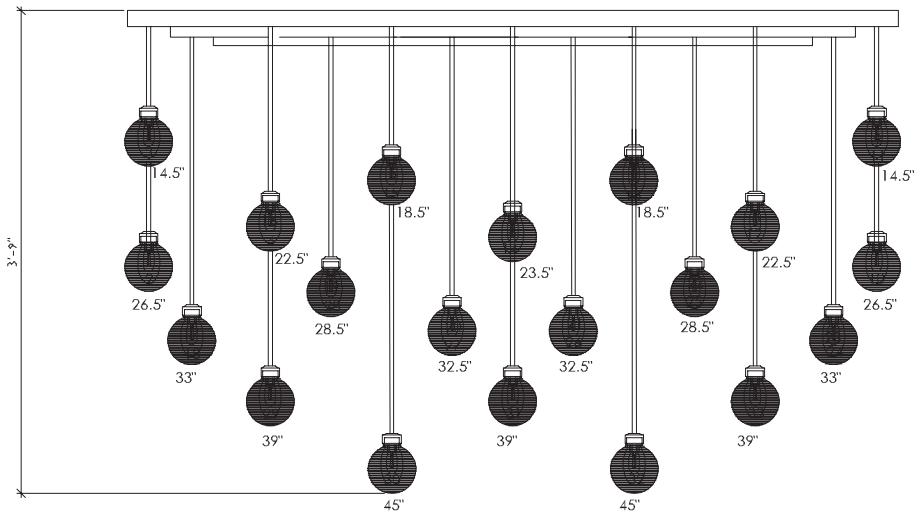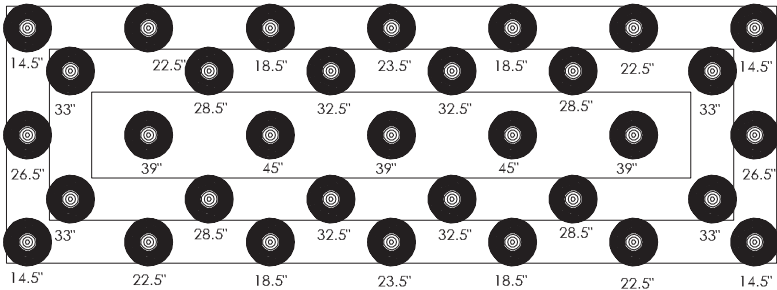

RH

PEARL LINEAR CHANDELIER 72" - STANDARD




10' CEILING HEIGHT

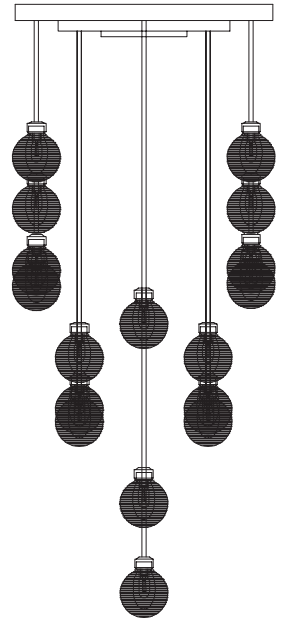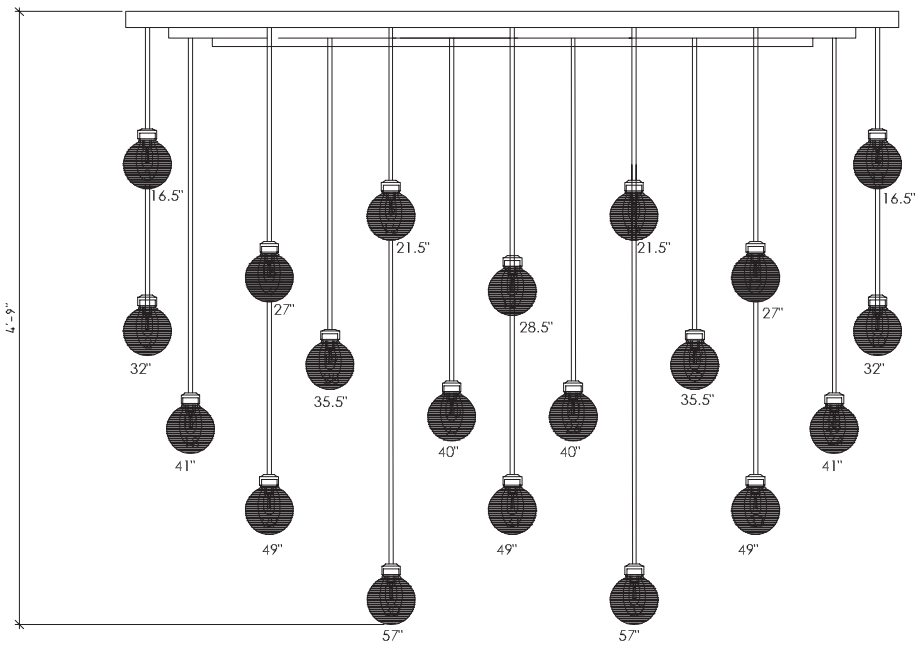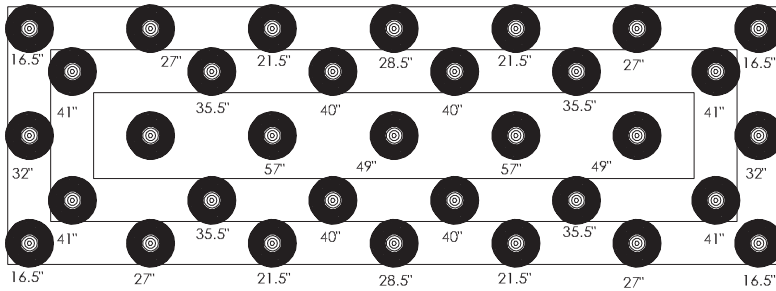

RH

PEARL LINEAR CHANDELIER 72" - STANDARD




11' CEILING HEIGHT

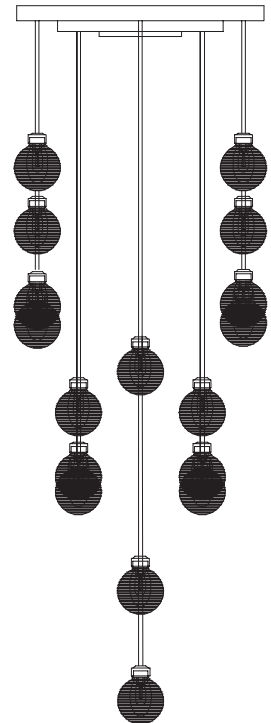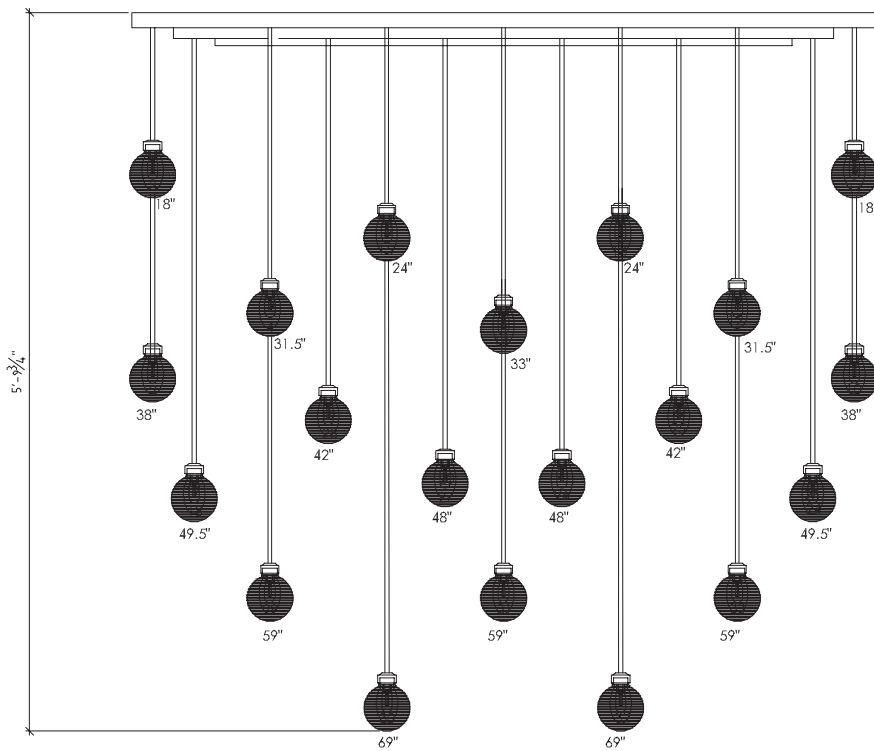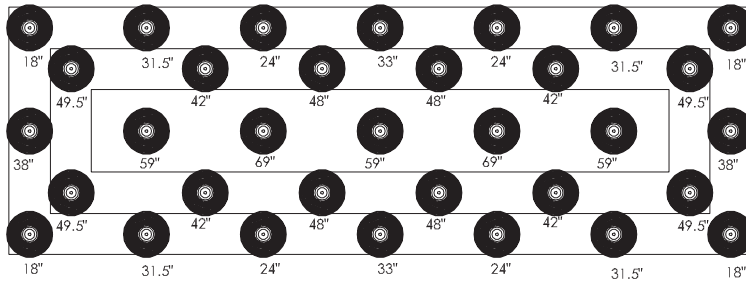

RH

PEARL LINEAR CHANDELIER 72" - STANDARD

12' CEILING HEIGHT

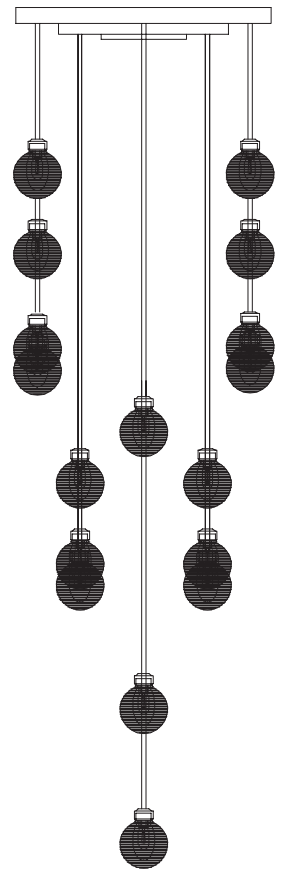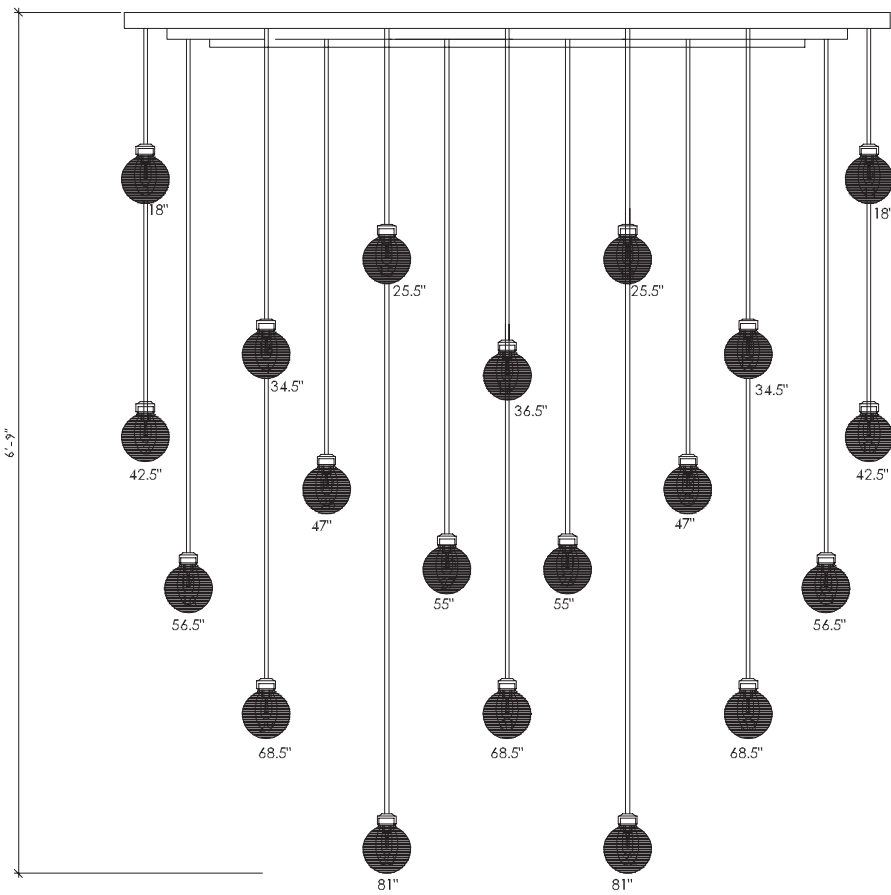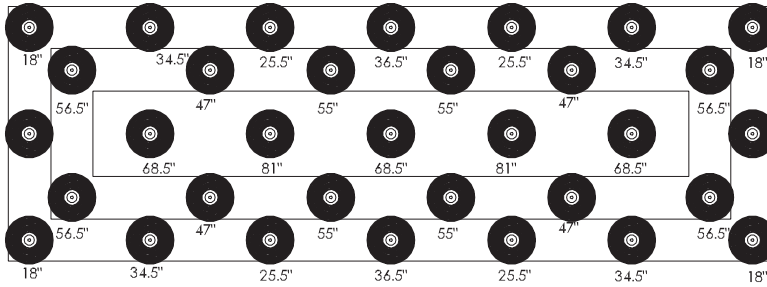


RH

PEARL LINEAR CHANDELIER 72" - LONG


PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Connection Rods (6)
- (C) Mounting Screws (2)
- (D) Canopy (1)
- (E) Nuts (6)
- (F) Cap Screws (6)
- (G) Caps (33)
- (H) Bulbs (33)
- (I) Crystal Shades (33)
- (J) Screwdriver (1)
- (K) T-Wrench (1)

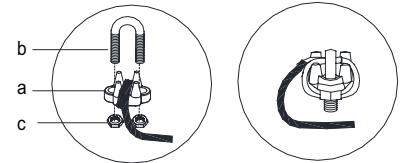

Install safety cable:

1. Wrap the safety cable into the slot hole on the mounting plate.
2. Wrap the safety cable around the saddle (a).
3. Insert U-bolt clip (b) into the saddle (a) and secure with the nuts (c).

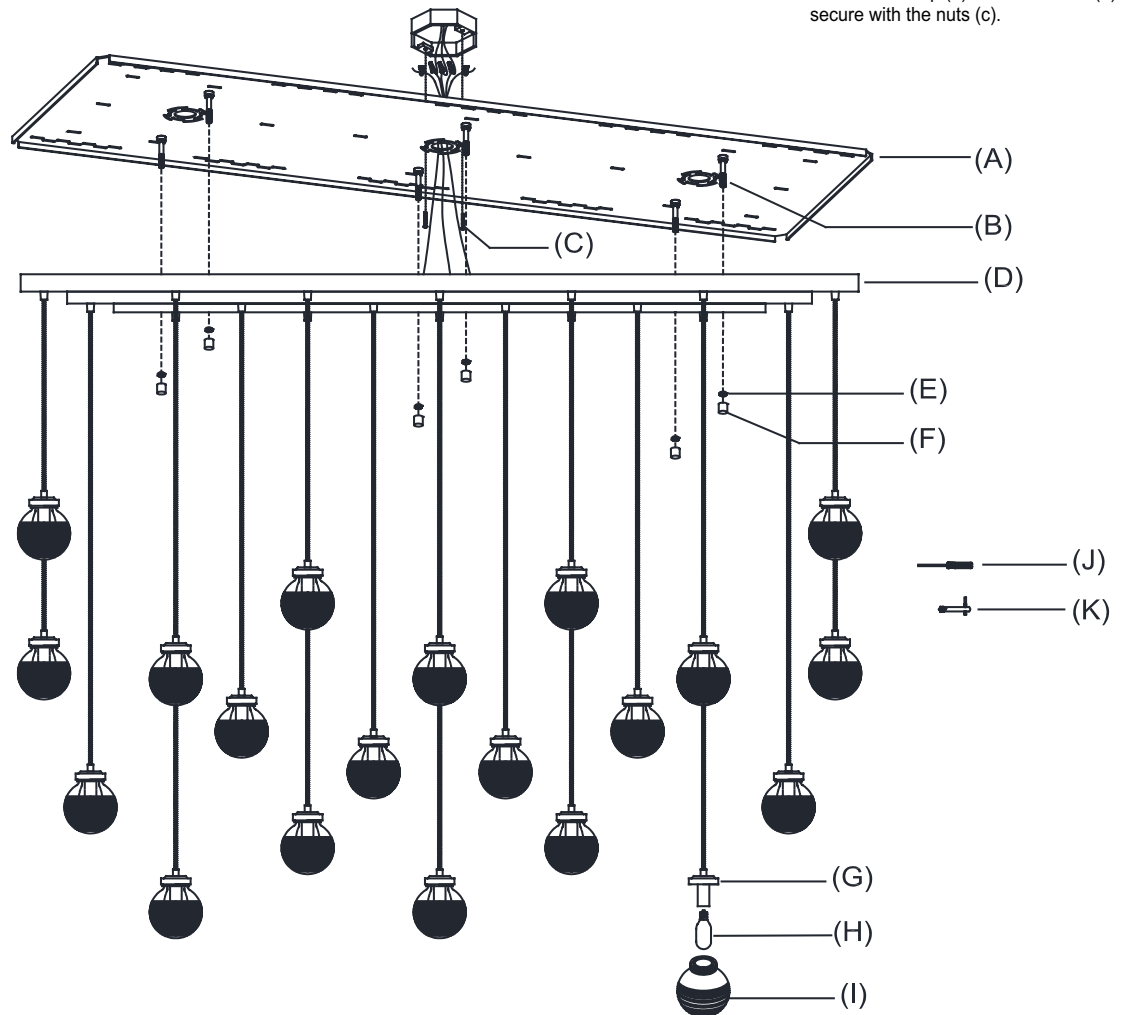

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for thirty-three (33) 25-watt maximum Type T lightbulbs (included) or thirty-three (33) 9-watt compact fluorescent lightbulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch or look directly at the bulbs when fixture is illuminated. Keep flammable materials away from lit bulbs



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Remove Mounting Plate (A) from Canopy (D) by removing Cap Screws (F) and Nuts (E).
3. Attach Mounting Plate (A) to the ceiling and secure with Mounting Screws (C) and other proper fasteners from your local hardware store.

ASSEMBLY & INSTALLATION CONT.


4. Connect the steel safety wire from the fixture and the safety cable from ceiling. Refer to the illustration on previous.
5. Attach the fixture ground wire (green or green/yellow) to the ground wire from the outlet box (usually green insulation or bare wire) with a plastic wire connector and wrap the connection with electrical tape. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
6. Connect the neutral wire from the fixture (white) to the outlet box neutral wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
7. Connect the hot wire (black) to the outlet box hot wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
8. Attach Canopy (D) with the fixture body to the affixed Mounting Plate (A). Let Connection Rods (B) pass through the holes on Canopy (D) and secure with Nuts (E) and Cap Screws (F).
9. Insert Bulbs (H) into each of the sockets.
10. Insert the top threaded portion of Crystal Shades (I) into Caps (G) and turn in a clockwise direction until snug. Do not overtighten. When replacing Bulbs (H), always make sure Crystal Shades (I) are securely tightened to Caps (G) for safety. Note: Do not inadvertently loosen Crystal Shades (I) from Caps (G) when cleaning, or Crystal Shades (I) could fall unexpectedly creating a safety hazard.
11. Restore power to outlet box and check operation of fixture.
12. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

PEARL LINEAR CHANDELIER 72" - LONG


WIRE ADJUSTMENT INSTRUCTION

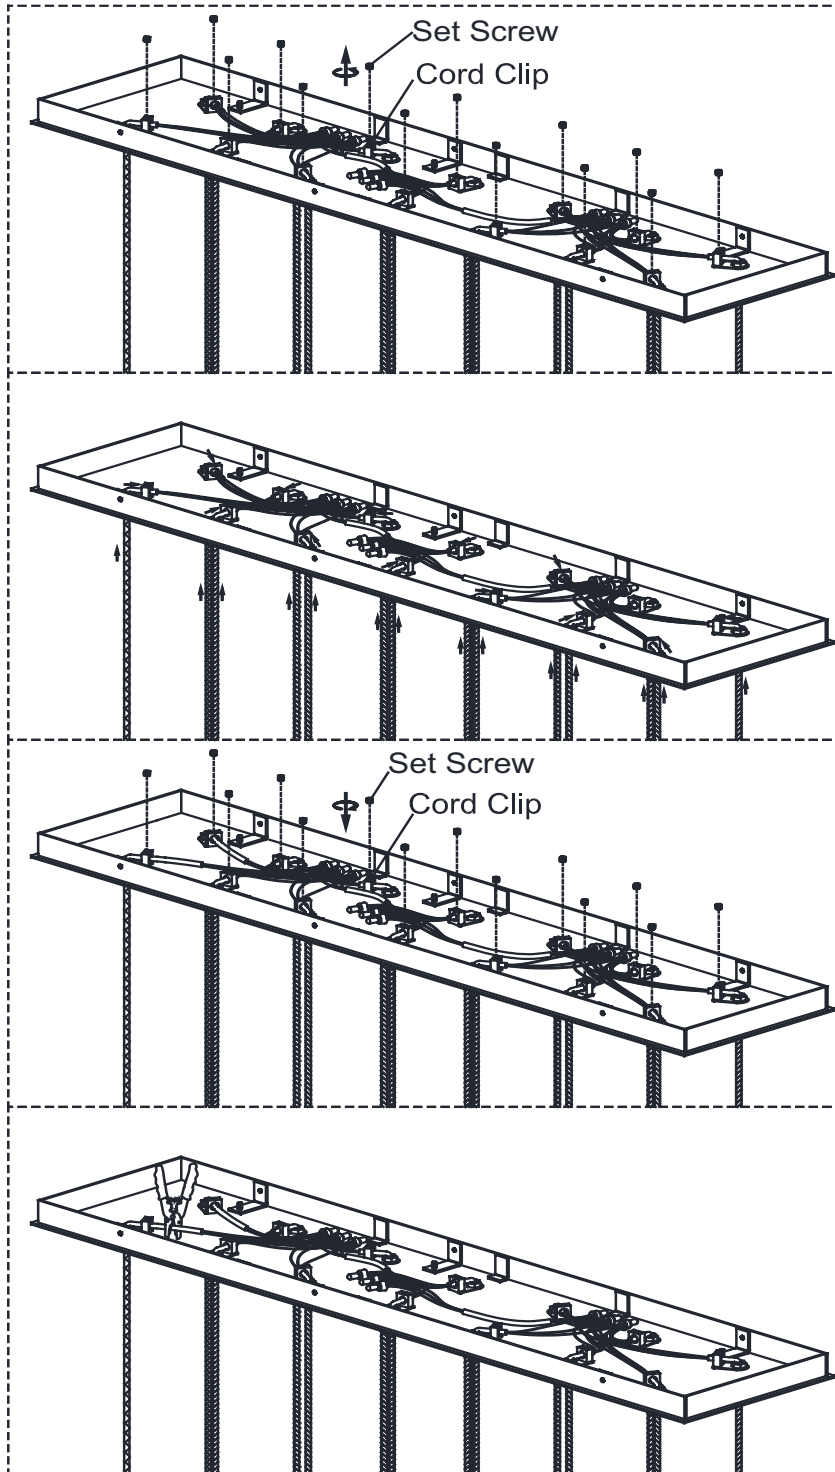

1. Loosen the screw on top of the cord clip.
2. Determine the hanging length for each of the Crystal Shades (I). Pull the hanging cords out through the cord clips to desired length according to your ceiling height (refer to illustrations on following pages).
3. Replace the screw and tighten to lock hanging cord in place.
4. Cut off the excess wire with a wire cutter.

PEARL LINEAR CHANDELIER 72" - LONG

WIRE CONNECTION INSTRUCTION

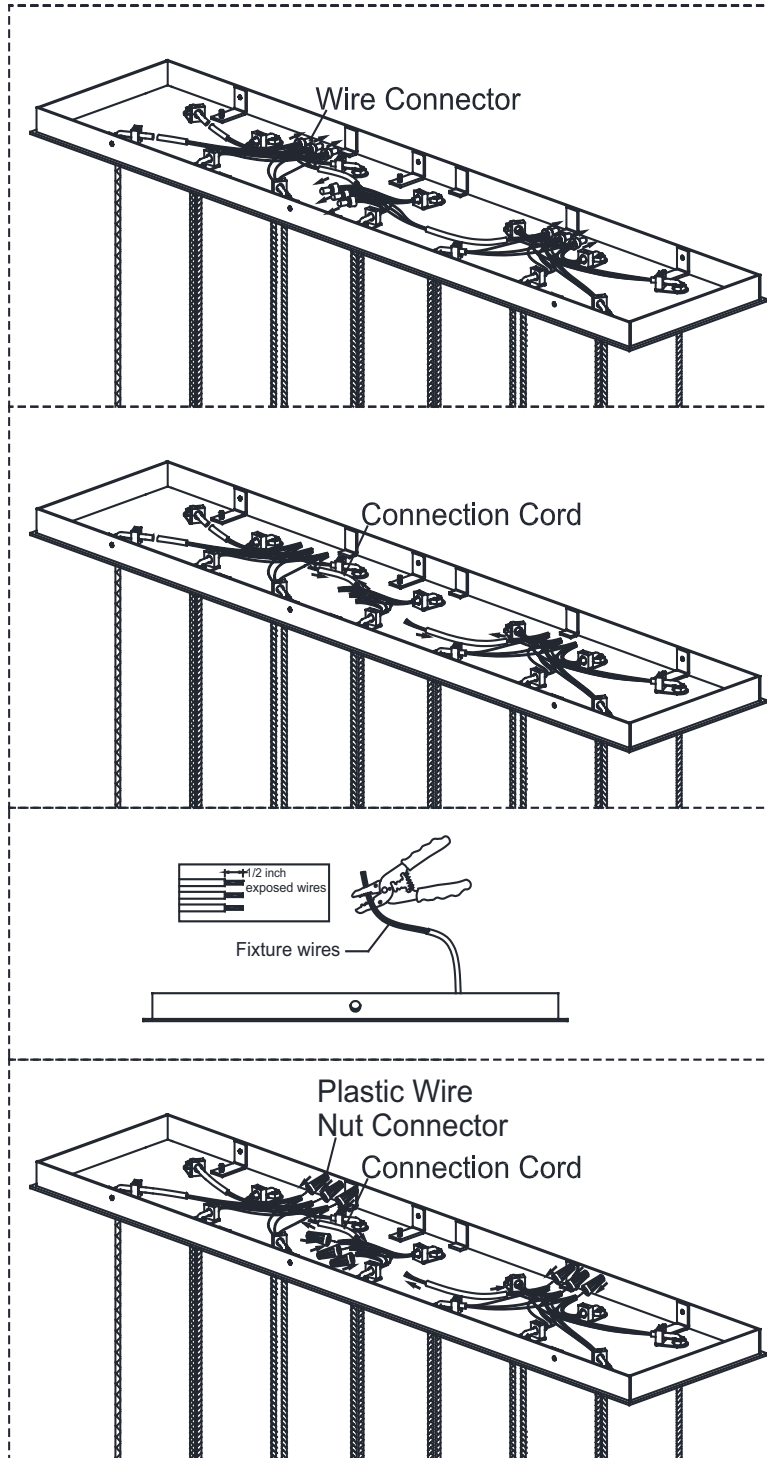

1. Remove the wire connectors using pliers.

2. Take apart the connection cord and set aside.

3. Use a pair of wire strippers to remove about 1/2" of insulation from each wire.

4. Re-connect the wire ends and secure with the plastic nut connectors.

RH

PEARL LINEAR CHANDELIER 72" - LONG

20' CEILING HEIGHT

