

RH

ÉCLATANT RECTANGULAR CHANDELIER 54"


ASSEMBLY & INSTALLATION INSTRUCTIONS

**UNITED STATES ENGLISH**

## ÉCLATANT RECTANGULAR CHANDELIER 54"

## PARTS INCLUDED

- (A) Mounting Plate (1)
- (B) Canopy (1)
- (C) 5/16"L Hex Socket Set Screws (6)
- (D) Safety Cables (2)
- (E) Power Cord Grippers (4)
- (F) Crystal Balls (8)
- (G) PVC Rings (8)
- (H) Hexagonal Plates (8)
- (I) Allen Wrench (1)
- (J) Wire Nuts (3)

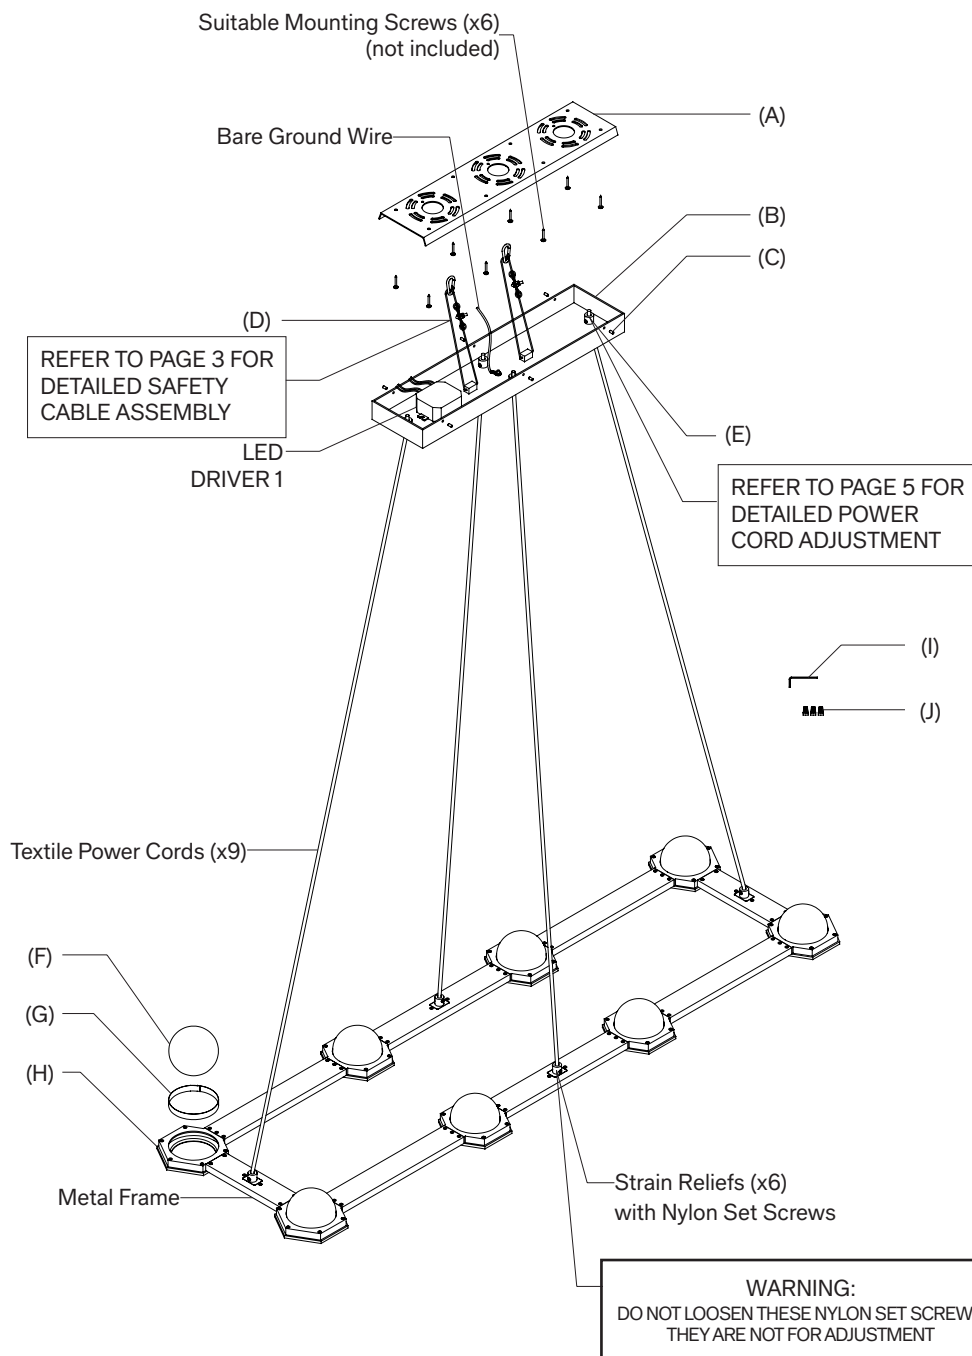

**IMPORTANT: PLEASE READ**

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING TO A WOODEN STRUCTURAL BEAM. UNIQUE OR ALTERNATIVE INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

**IMPORTANT SAFETY FEATURES****BULBS**

This fixture has been rated for up to eight (8) 2.5-watt maximum 12VDC LED Strips (included). To avoid the risk of fire, do not exceed the recommended wattage.

**VAULTED CEILING COMPATIBILITY**

This fixture is not vaulted-ceiling compatible.

**DIMMER SWITCH COMPATIBILITY**

This fixture is dimmer-switch compatible, and may only be used with a forward- or reverse-phase dimmer switch.

**CEILING REINFORCEMENT**

Fixtures weighing 50 lb. or more will require additional reinforcement above the ceiling where they are to be installed. The ceiling must have at least the load bearing capacity of 5 times of the weight of the ceiling light. For this light, ceiling should have load bearing capacity of 250 lb. at least.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.


**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.


**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.**

**SAFETY CABLE INSTALLATION**

1. Open the Quick Link and hang it on the Loop.
2. Release the Quick Link.

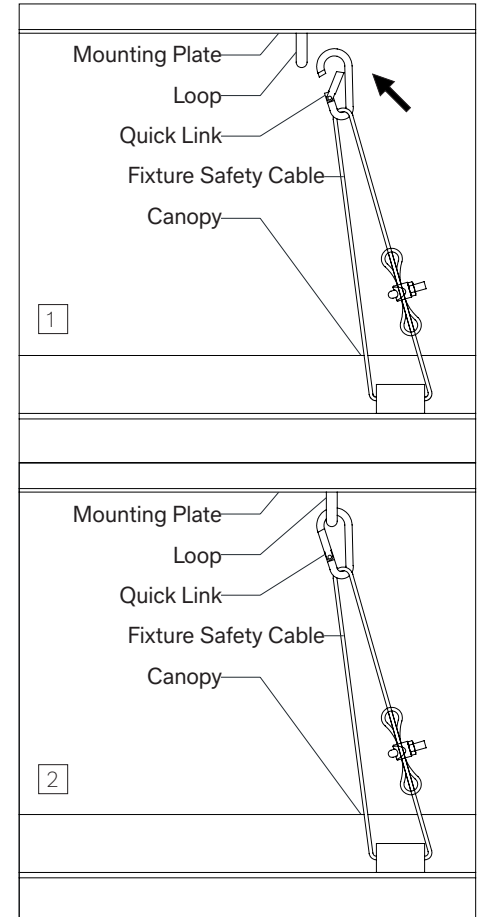**ALIGN JOINT SEAM**

1. Align the joint seam on the PVC Ring toward the metal ring of the fixture.

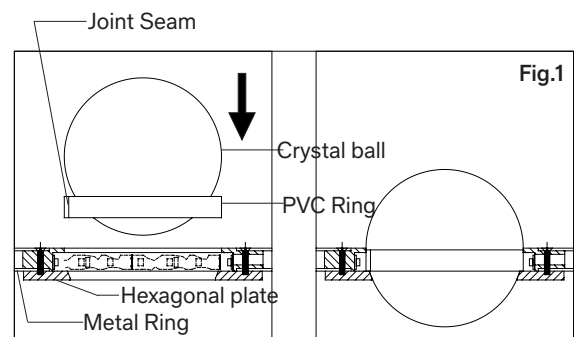

**ASSEMBLY AND INSTALLATION****SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

2. Carefully remove all parts from the box and remove all plastic coverings.
3. Determine the hanging length of pendant, and adjust the length of textile Power Cord according to the height needed (see Page 5).
4. Attach Mounting Plate (A) to ceiling's outlet box and secure with suitable mounting screws (not included) and proper fasteners from your local hardware store.
5. Carefully inspect the pendant's fixture wires. White wire is the NEUTRAL WIRE. Black wire is the HOT WIRE. The green and bare wires are the GROUND WIRES.
6. Carefully lift the Canopy (B) with the light fixture close to outlet box to connect the Safety Cables (D) and for wiring.
7. Connect the Safety Cables (D) from the Canopy (B) to Mounting Plate (A) (see Page 3).
8. Connect the GREEN GROUND WIRE and BARE GROUND WIRE from the fixture with the ground wire (usually bare) from your outlet box using a Wire Nut (J) (see Page 8, 9, and 10). If your house does not have a ground wire, attach the GROUND WIRE from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
9. FOR DIMMING, choosing a Wall Dimmer (see Page 7) and follow the WIRING DIAGRAM (see Page 8 and 9) to inspect and connect the wires according to the Dimming Function (ELV / TRIAC) of your Dimmer.
10. FOR NON-DIMMING, follow the WIRING DIAGRAM (see Page 10) to Connect the NEUTRAL WIRE from your fixture with the neutral wire (usually white) from your outlet box using a Wire Nut (J). Connect the HOT WIRE from your fixture with the hot wire (usually black) from your outlet box using a Wire Nut (J). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
11. Tuck the wire connections neatly into the ceiling's outlet box.
12. Attach Canopy (B) with light fixture to affixed Mounting Plate (A) and secure with 5/16"L Hex Socket Set Screws (C) using Allen Wrench (I).
13. Carefully place the PVC Rings (G) and Crystal Balls (F) on the Hexagonal Plate (H). Align the PVC Ring's joint seam toward the Metal Frame before placing the Crystal balls (F) (see Fig. 1).
14. Assembly is complete.

**CARE INSTRUCTIONS**


Wipe all surfaces with a soft, dry cloth. Clean glass with a mixture of mild soap and water. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.

**ATTENTION: ADJUSTING THE HANG HEIGHT**

Any adjustments or alterations to the lamp, cord, or overall hang height that differ from those detailed on RH.com will void the Laboratory Listing and Approvals (UL, ETL, CSA etc.). If the listing is voided, this means the product may no longer be safe for use as modified. RH does not recommend modifying the product.

**HEIGHT ADJUSTMENT INSTRUCTIONS**

1. Loosen Slotted Nylon Screws from Power Cord Gripper and adjust the length of Textile Power Cord.
2. Secure the Textile Power Cord by tightening both Slotted Nylon Screws.


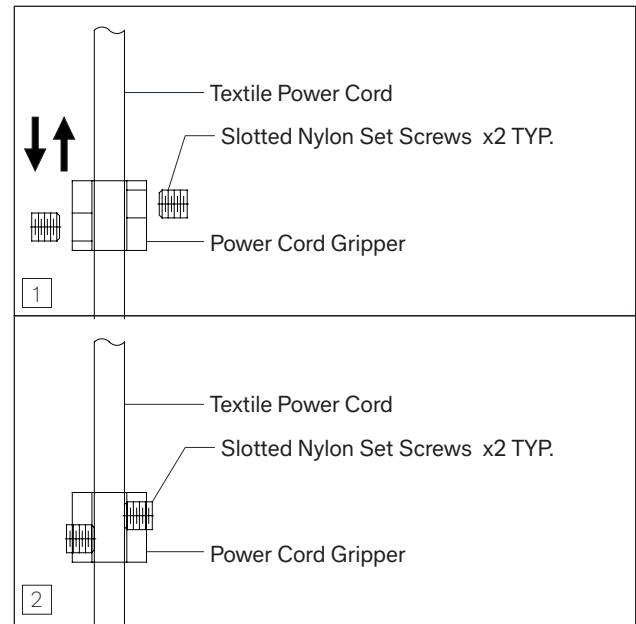


## DIMMER SWITCH COMPATIBILITY GUIDE

WALL DIMMER MODEL	DIMMABILITY	
PASS & SEYMOUR / LEGRAND "Harmony" D703PNIV	Excellent	Best Performance Dimming capability: +/- 5% < 100 % > 5%
LUTRON "DIVA" DVELV-300P	Good	Good performance Dimming capability: +/- 10% < 100 % > 10%
LEVITON Universal, "DECORA SMART" Dimmer w/Wi-Fi Technology DW6HD	Acceptable	Acceptable Performance Dimming capability: +/- 20% < 100 % > 20%
<b>WARNING:</b> DO NOT HOOK UP THESE FIXTURES TO MECHANICAL DIMMERS, AS IT WILL PERMANENTLY DAMAGE THE COMPONENTS.		

**CAUTION:**

- ALWAYS FOLLOW LOCAL ELECTRICAL CODE REGULATIONS WHEN INSTALLING LED DRIVERS & FIXTURES.
- DO NOT ATTACH 0-10V DIMMING WIRES TO HOT / LINE VOLTAGE WIRE.
- LEAVE WIRE CAPS ON 0-10V DIMMING WIRES WHEN NOT IN USE TO PREVENT SHORT CIRCUIT.
- FOR LTF UNIDRIVER POWER SUPPLIES, DO NOT INSTALL/ USE ELV AND 0-10V DIMMERS SIMULTANEOUSLY ON ONE DRIVER.

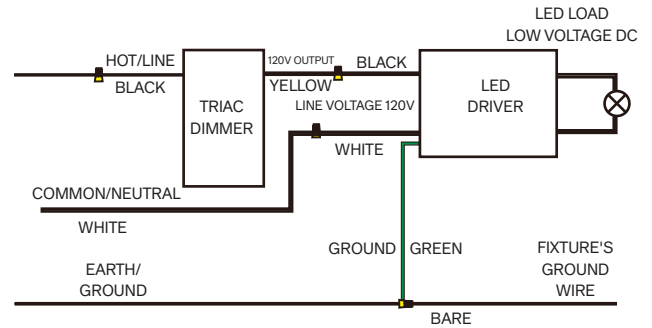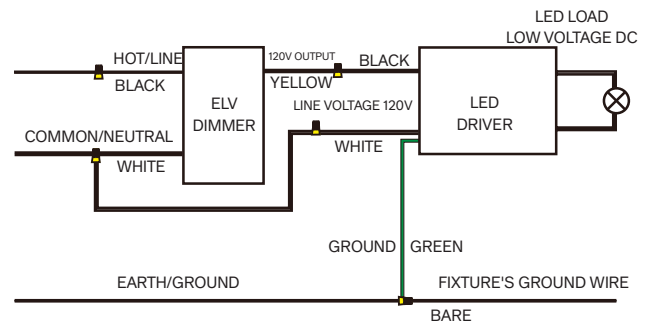**WIRING DIAGRAM****FORWARD PHASE (TRIAC) DIMMING****REVERSE PHASE (ELV) DIMMING****NO DIMMING**