

RH


RHYS RECTANGULAR CHANDELIER 49"

PARTS ENCLOSED

- (A) Junction Box, 22.7kg/50lbs. MIN. FIXTURE RATED (not included)
- (B) Mounting Screws (5 sets; not included)
- (C1) Ceiling Mounting Plate (1)
- (C2) Hang Straights (2)
- (C3) Ceiling Box (1)
- (C4) Screw Caps (2)
- (D1) Quick links (2)
- (D2) Chains (2)
- (D3) Quick Links (2)
- (E) Wire Nuts (3)
- (F) Bulbs (8 + extra 3)
- (G) Glass Drops (84 + extra 5)
- (H) Body (1)
- (L) Safety Cable (1)

PRODUCT DESCRIPTION

General material: Glass and Iron
 Height: 11.42in. (29.0cm)
 Width: 13.78in. (35.0cm)
 Length: 49.21in. (125.0cm)
 Weight: 73.61lbs. (33.4 kg)
 Grounded/Hardwired

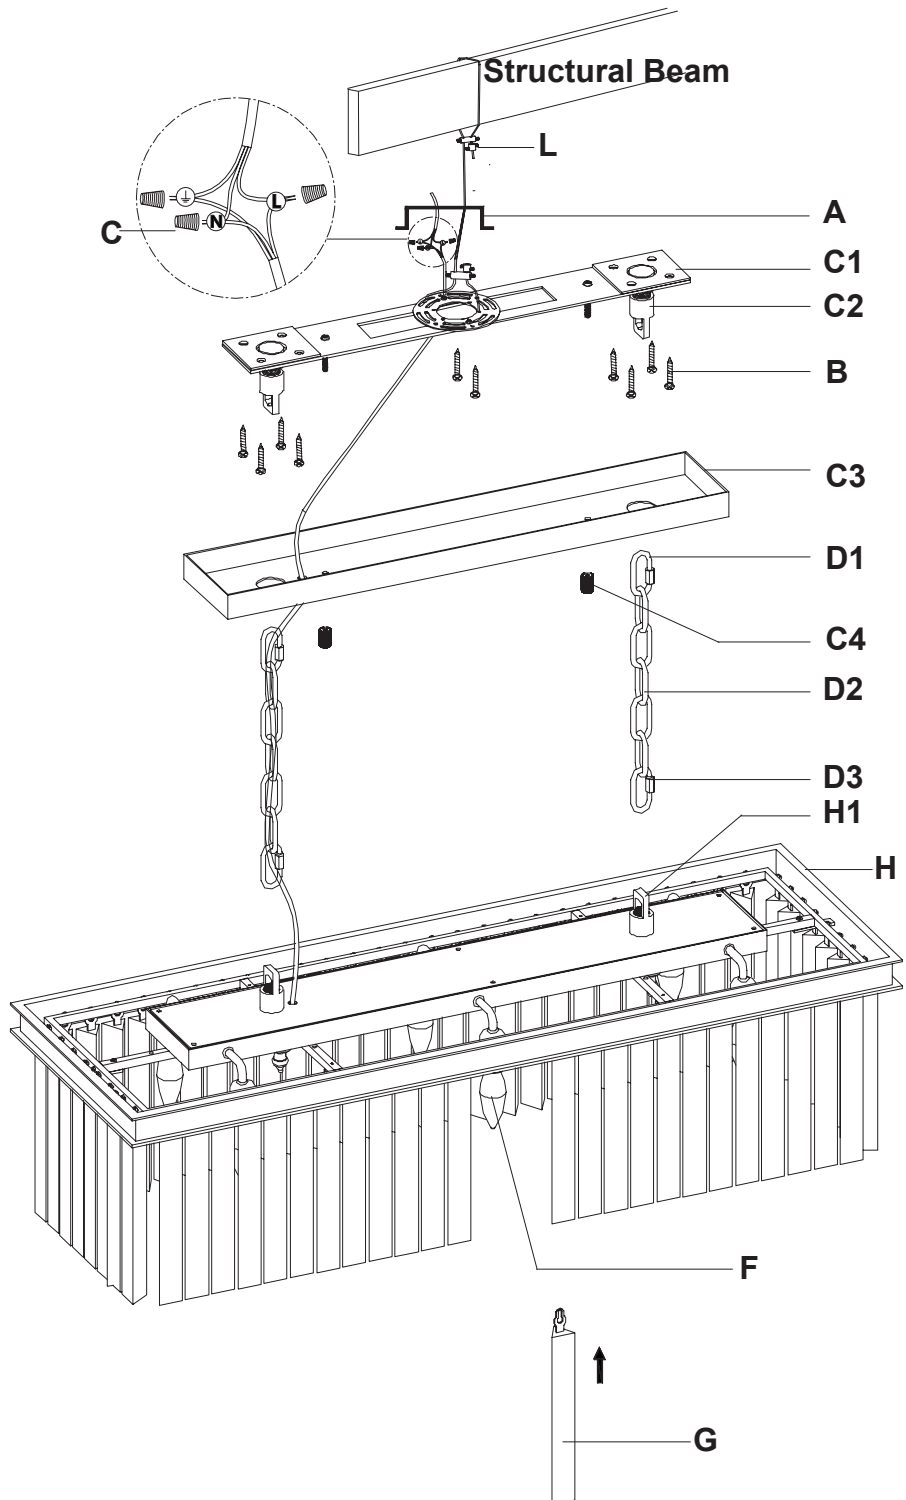



RHYS RECTANGULAR CHANDELIER 49"

PROFESSIONAL INSTALLATION REQUIRED IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation.
2. This fixture has been rated for eight (8) 25-watt maximum E12 bulbs.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The ceiling must have at least the capacity of 5 times the weight of the ceiling light. For this light, at least a wall capacity of 368.16lbs. (167kg) is required.
5. The manufacturer and distributor accept no liability for incorrect installation.
6. For indoor use only.
7. Keep away from children.

WARNINGS

1. Turn off electricity supply at main circuit panel before installing. Do not connect electricity supply until your light is fully assembled and installed.
2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing lightbulbs. Do not touch bulbs when fixture is turned on or look directly at lightbulbs. Keep flammable materials away from lightbulbs.
4. Deviation from instructions may result in a risk of fire or electric shock.

ASSEMBLY & INSTRUCTIONS, CONT.

- the connection with electrical tape.
7. Move the ceiling box (C3) up to the ceiling, then fasten the screw caps (C4).
 8. Unlock the quick link (D1) on the opposite end of the chain (D2) and attach to the hang straight (C2) of the ceiling plate (C1).
 9. Fasten lightbulbs (F) to the lampholders.
 10. Hang the glass drops (G) from the inner to the outer layer and keep flat surface of glass drop inside. To ensure safety of chandelier during glass drop installation, please maintain level of chandelier by installing glass drops alternately on opposite ends of fixture.
 11. Restore power to the junction box and test ceiling light fixture.

CARE INSTRUCTIONS

1. Make sure that power is turned off and bulbs have cooled before handling.
2. Wipe clean with a dry cloth/mild soapy solution. Do not use corrosive cleaners.
3. The cable/cord of this ceiling light cannot be replaced; if the cable is damaged, do not use the light.

ENVIRONMENT

Special waste handling may be required. Please contact your local authorities for more information.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

ASSEMBLY & INSTRUCTIONS

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn OFF power to the junction box where the ceiling light will be installed.
3. Loosen the screw cap (C4) from the ceiling box (C3) and remove ceiling plate (C1).
4. Unlock the quick link (D3) on the opposite end of the chain (D2) and attach to the hang straight on body (J).
5. Attach the ceiling plate (C1) to the ceiling with mounting screws (B).
6. Connect the ground wire from the fixture to the ground junction box wire (A) (usually the green or bare wire) and wrap the connection with electrical tape. Connect the hot wire to the hot junction box wire (A) (usually black or smooth) with a plastic wire nut (E) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (A) (usually white or ribbed) with a plastic wire nut (E) and wrap

CEILING SAFETY CABLE ASSEMBLY

1. Remove nut lockers A & B by loosening the set screw from the ceiling safety cable before installation.
2. Insert the ceiling safety cable through the nut lockers as the drawing shows.
3. Fasten nut locker A with set screw by small Allen key.
4. Fasten nut locker B with set screw by small Allen key.

