
PARTS ENCLOSED

- (A) Junction Box (not included) 50lb (22.7kg). MIN. FIXFURE RETED
- (B) Mounting Screws (4; not included)
- (C) Wire Nut (3)
- (D1) Wall Plate (1)
- (D2) Screw Cap (2)
- (D3) Screw Nut (2)
- (E) Body (1)
- (F) Calcite Shade (1)
- (G) Bulb (1+1 Extra)

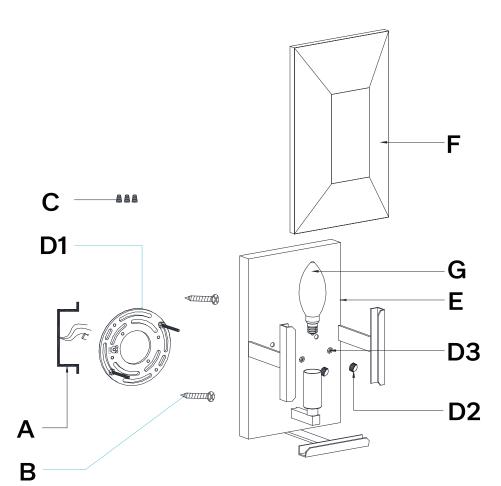

PRODUCT DESCRIPTION

General material: Calcite and Iron

Height: 10 in (26.0cm) Width: 6.14in (15.6cm) Depth: 5.51in (14cm) Weight: 7.83lb (3.55kg)



IMPORTANT PLEASE READ

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENED

- Use an authorized and certified electrician for consultation and installation. Electrician must be familliar with commercial-type applications of wall light.
- 2. The screws need to be screwed into a solid support structure inside the wall, which would require professional.
- 3. This fixture has been rated for one (1) 25 watt maximum E12 standard bulb.
- 4. To avoid the risk of fire, do not exceed the recommended wattage.
- The wall must have at least the capacity of 5 times the weight of the wall ligth. For this light, at least a wall capacity of 36.71lb (16.65kg) is required.
- The manufacturer and distributor accepts no liability for incorrect installation.
- 7. For indoor use only.
- 8. Keep away from chindren.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE

⚠ WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years age.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

- 1. Carefully remove all parts from the box and remove all plastic covering.
- 2. Turn OFF power to the junction box where the wall light will be installed.
- 3. Loosen the scews nut (D3) and screw cap (D2), remove wall plate (D1).
- 4. Attach the wall plate (D1) to the wall with mounthing screws (B).
- 5. Connect the ground wire from the fixture to the ground junction box wire (A; usually the green or bare wire) with a wire nut (C) and wrap the connection with electrical tape. Connect the hot wire to the junction box wire (A; usually black or smooth) with a plastic wire nut (C) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (A; usually white or ribbed) with a plastic wire nut (C) and wrap the connection with electrical tape.
- 6. Move the bady (E) up to the wall plate (D1), then fasten the screw nut (D3) and screw cap (D2).
- 7. Fasten lightingbulb (G) to the lampholder.
- 8. Insert the Calcite shade (F) onto the body (E).
- 9. Restore power to the junction box and test wall light fixture.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

ENVIRONMENT

Special waste handing may be required. Please contact your local authorities for more information.