



CAMINO VINTAGE TWO-TIER CHANDELIER 50 INCH

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. IF YOU ARE UNSURE ABOUT YOUR CEILING TYPE OR WHAT MOUNTING METHOD YOU SHOULD USE, CONSULT A QUALIFIED PROFESSIONAL OR YOUR LOCAL HARDWARE STORE.

Parts Enclosed:


- (A) Mounting Plate (1)
- (B) Swivel (1)
- (C) Canopy (1)
- (D) Canopy Ring (1)
- (E) Bottom Ring (1)
- (F) Tube (1)
- (G) Nut (3)
- (H) Hook 3 (3)
- (I) Hook 2 (3)
- (J) Hook 1 (3)
- (K) Extension Rod (4), 6" Rod (1) and 12" Rod (3)
- (M) 90 Degree Short Hook (3)
- (N) Inline Short Hook (3)
- (O) Top Ring (1)
- (a) Plastic Wire Connector (3)
- (b) Small Ceiling Anchors (4)
- (c) Ceiling Screws (4)
- (d) Allen Key (1)
- (e) Ceiling Plate (1)
- (f) Steel Wire Connector (1)
- (g) Connector Screws (2)
- (h) Steel Wire (1)
- (j) Big Ceiling Anchors (2)
- (k) M6 Round Head Wall Screw (2)
or G1/4-20T Round Head Screw (2)

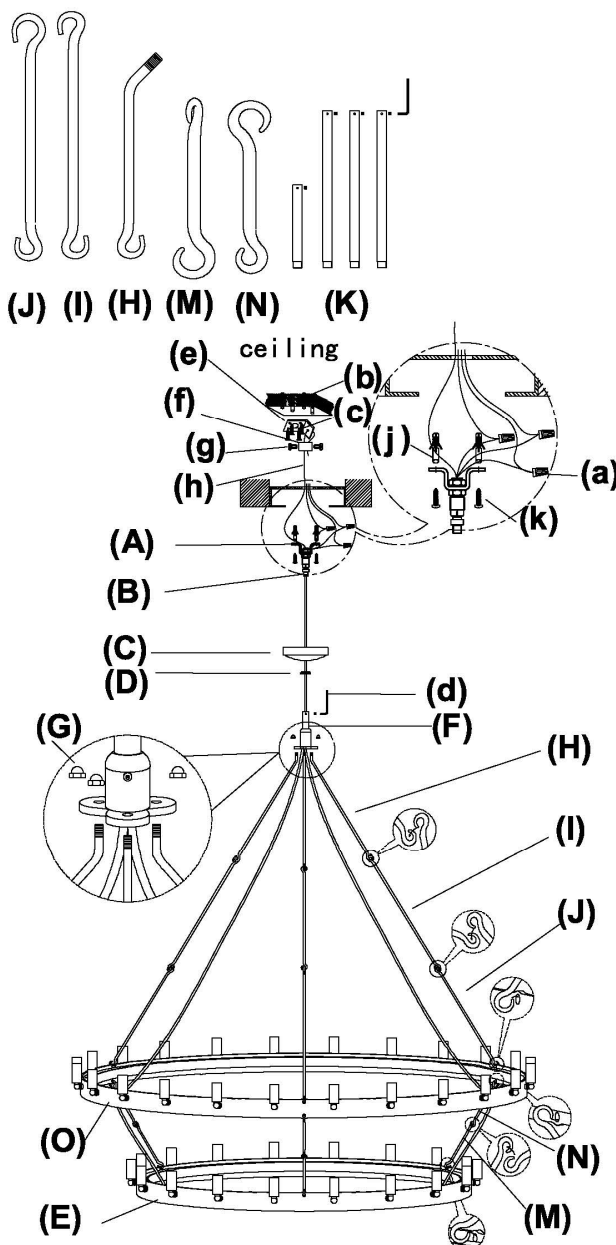


REFER TO THE NEXT PAGE FOR DETAILED SAFETY CABLE ASSEMBLY.

CAMINO VINTAGE TWO-TIER CHANDELIER 50 INCH


SAFETY CABLE ASSEMBLY

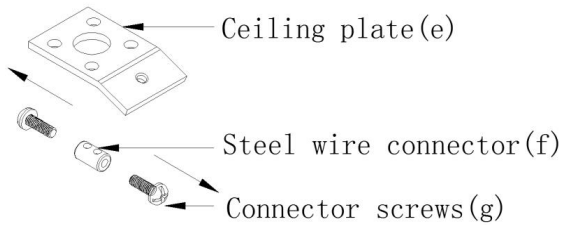

1. Remove the Connector Screws (g) from Steel Wire Connector (f).

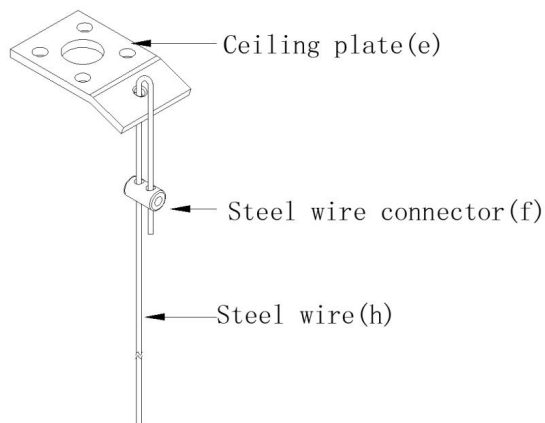

2. Pull the Steel Wire (h) to slide through one hole of the Steel Wire Connector (f) and side hole of the Ceiling Plate (e). Then connect to the other hole of the Steel Wire Connector (f).

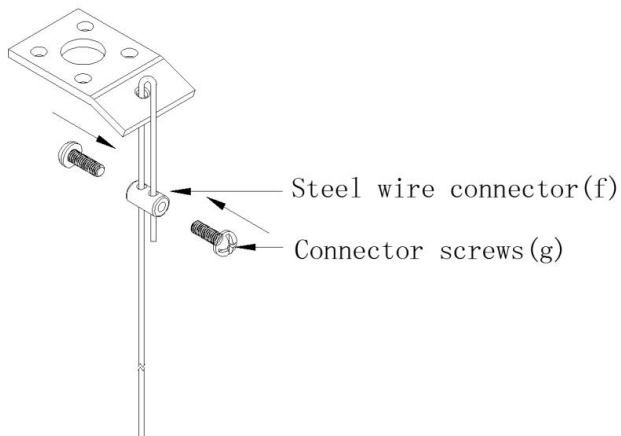

3. Using two Connector Screws (g), secure the Steel Wire Connector (f) tightly based on desired hanging height.

CAMINO VINTAGE TWO-TIER CHANDELIER 50 INCH


IMPORTANT PLEASE READ**WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.****IMPORTANT SAFETY INSTRUCTIONS:**

This fixture has been rated for up to (42) 15W max Type T or Type CA bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.


WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off the lamp and allow it to cool prior to replacing the lightbulb. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning, or otherwise touching this light fixture.

 **WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.

 **WARNING: STRANGULATION HAZARD**
Keep cord at least 3ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

ASSEMBLY & INSTALLATION:

(PROFESSIONAL INSTALLATION RECOMMENDED, OR AT LEAST 3-4 PERSONS TO FINISH THE INSTALLATION.)

1. Carefully remove all parts from the box and remove plastic covering.
2. Turn OFF power to the junction box where the lamp will be installed.
3. Insert the 90 degree Short Hook (M) into the Bottom Ring (E). Insert the Inline Short Hook (N) into the Top Ring (O). Then connect Hook (M) and Hook (N).
4. Insert the Hook 1 (J) into the Top Ring (O) and Hook 2 (I). Connect Hook 2 (I) and Hook 3 (H). Then insert Hook 3 (H) into the hole of the Tube (F) using the Nut (G) to tighten it.
5. Connect the Extension Rod (K) in different lengths to the Connecting Tube (F). Then slide the Canopy Ring (D) and Canopy (C) onto the other end of Extension Rod (K). Determine how many extension rods need to be assembled according to the desired height.
6. Insert the Extension Rod (K) into the Swivel (B) and turn clockwise until the Extension Rod (K) screws into the Swivel (B). Secure the Extension Rod (K) by using the Allen Key (d) provided.
7. Drill two holes in the ceiling to align with the holes on the Mounting Plate (A), and insert Big Ceiling Anchor Screws (j). Then screw two Round Head Wall (k) into anchors. If desired, use two G1/4-20T Round Head Screws (k) to fix the Mounting Plate (A) onto the outlet box.
8. Drill four holes in the ceiling to align with the holes on the Ceiling Plate (e), and insert Small Ceiling Anchors (b).
9. Screw four Ceiling Screws (c) into anchors.
10. Pull the Steel Wire (h) to thread through the Steel Wire Connector (f) and side hole of the Ceiling Plate (e). Then connect to the other hole of the Connector (f). Using two Connector Screws (g), secure tightly based on desired hanging height.
11. Connect the hot wire to the hot junction box wire (usually black or smooth) with a Plastic Wire Connector (a) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a Plastic Wire Connector (a) and wrap the connection with electrical tape.
12. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green or bare wire) with a Plastic Wire Connector (a) and wrap the connection with electrical tape.
13. Slide the Canopy Ring (D) up until it reaches underneath the canopy. Then screw tightly to hold the Canopy (C) against the ceiling.
14. Insert the 42 bulbs into the threaded sockets.
15. Restore power to the junction box and test fixture.
16. Installation is complete.