


## CAMINO VINTAGE ONE-TIER ROUND CHANDELIER 38 INCH

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. IF YOU ARE UNSURE ABOUT YOUR CEILING TYPE OR WHAT MOUNTING METHOD YOU SHOULD USE, CONSULT A QUALIFIED PROFESSIONAL OR YOUR LOCAL HARDWARE STORE.

### Parts Enclosed:

- (A) Mounting Plate (1)
- (B) Swivel (1)
- (C) Canopy (1)
- (D) Canopy Ring (1)
- (E) Base (1)
- (F) Tube (1)
- (G) Nut (4)
- (H) Hook 3 (4)
- (I) Hook 2 (4)
- (J) Hook 1 (4)
- (K) Extension Rod(4), 6" Rod (1) and 12" Rod (3)
- (a) Plastic Wire Connector (3)
- (d) Allen Key (1)
- (j) Big Ceiling Anchors (2)
- (k) M6 Round Head Wall Screw (2)  
or G1/4-20T Round Head Screw (2)

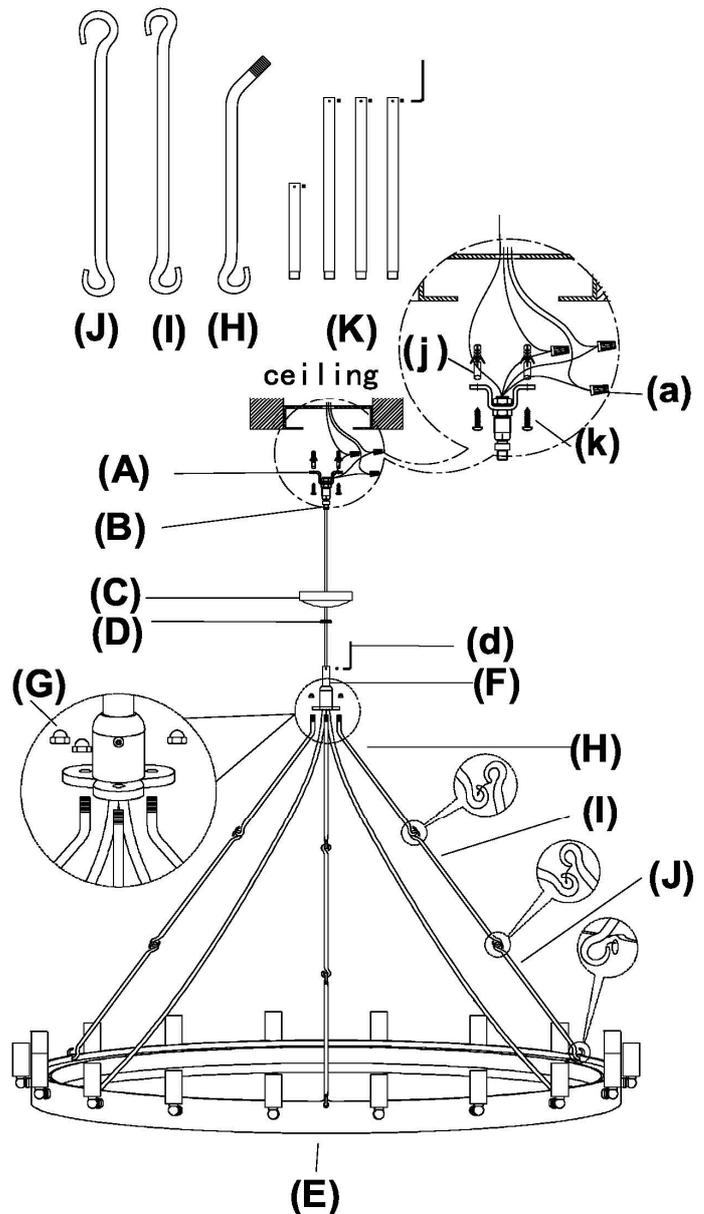

## CAMINO VINTAGE ONE-TIER ROUND CHANDELIER 38 INCH

**IMPORTANT PLEASE READ****WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.****IMPORTANT SAFETY INSTRUCTIONS:**

This fixture has been rated for up to (18) 25W max Type T or Type CA bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

**WARNINGS:**

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off the lamp and allow it to cool prior to replacing the lightbulb. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning, or otherwise touching this light fixture.

 **WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.**

 **WARNING: STRANGULATION HAZARD**  
Keep cord at least 3ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

**ASSEMBLY & INSTALLATION:**

(PROFESSIONAL INSTALLATION RECOMMENDED, OR AT LEAST 3-4 PERSONS TO FINISH THE INSTALLATION.)

1. Carefully remove all parts from the box and remove plastic covering.
2. Turn OFF power to the junction box where the lamp will be installed.
3. Insert the Hook 1 (J) into the Base (E) and Hook 2 (I). Connect Hook 2 (I) and Hook 3 (H). Finally, insert Hook 3 (H) into the hole of the Tube (F) using the Nut (G) to tighten it.
4. Connect the Extension Rod (K) in different lengths to the Connecting Tube (F). Then slide the Canopy Ring (D) and Canopy (C) onto the other end of Extension Rod (K). Determine how many extension rods need to be assembled according to the desired height.
5. Insert the Extension Rod (K) into the Swivel (B) and turn clockwise until the Extension Rod (K) screws into the Swivel (B). Secure the Extension Rod (K) by using the Allen Key (d) provided.
6. Drill two holes in the ceiling to align with the holes on the Mounting Plate (A), and insert Big Ceiling Anchors (j). Then screw two Round Head Wall Screws (k) into anchors. If desired, use two G1/4-20T Round Head Screws (k) to fix the Mounting Plate (A) onto the outlet box.
7. Connect the hot wire to the hot junction box wire (usually black or smooth) with a Plastic Wire Connector (a) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a Plastic Wire Connector (a) and wrap the connection with electrical tape.
8. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green or bare wire) with a Plastic Wire Connector (a) and wrap the connection with electrical tape.
9. Slide the Canopy Ring (D) up until it reaches underneath the canopy. Then screw tightly to hold the Canopy (C) against the ceiling.
10. Insert the 18 bulbs into the threaded sockets.
11. Restore power to the junction box and test fixture.
12. Installation is complete.