


RESTORATION HARDWARE

TEARDROP FILAMENT CHANDELIER 19-CORD

PARTS ENCLOSED

- | | |
|-----------------------------|------------------------|
| (A) Mounting Plate (1) | (J) Glass Shade (19) |
| (B) Mounting Screw (2) | (K) Light bulb (19) |
| (C) Wire connection box (1) | (L) Retaining Ring (1) |
| (D) Cap nut (2) | |
| (E) Base Screw (3) | |
| (F) Fixture Base (1) | |
| (G) Shade holder (19) | |
| (H) Thumbscrew (57) | |

INSTALLATION WITH NO CORD LENGTH ADJUSTMENT

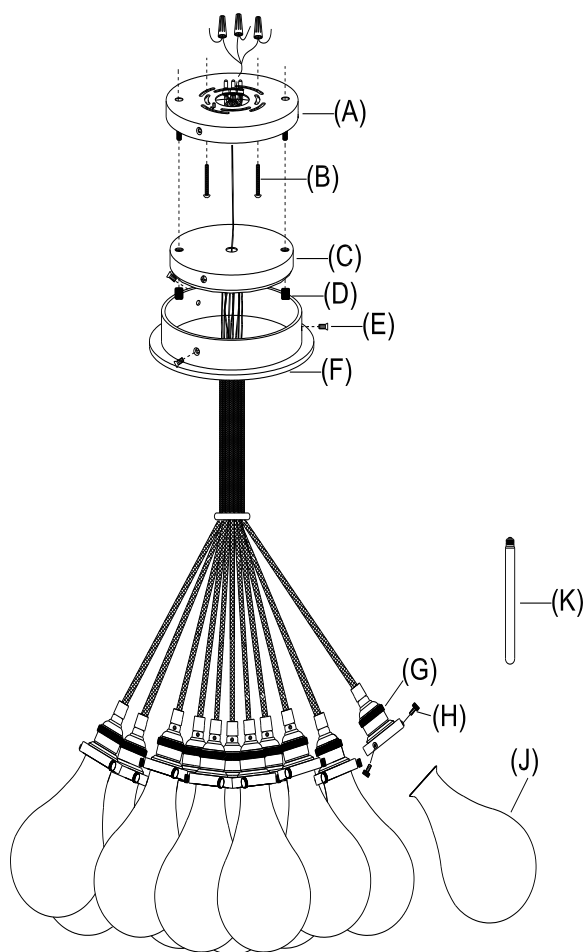

INSTALLATION BY A LICENSED ELECTRICIAN IS REQUIRED.

This fixture has been rated for up to nineteen (19) 40-Watt maximum Type T bulbs (30-Watt Type T9 Bulb included) or 13-Watt compact fluorescent light bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

1. **DISCONNECT ELECTRICITY BEFORE BEGINNING INSTALLATION. DO NOT RECONNECT ELECTRICITY UNTIL YOUR LAMP IS FULLY INSTALLED!**
2. Do not remove the lamp from its packaging by pulling on the power cords, as a bad connection may result.
3. All lamp wires are already connected. Only the wires leading from the wire connection box (C) to the outlet box (in the ceiling) need to be connected.
4. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light bulbs.
5. Do not touch a bulb when the fixture is turned on. Do not look directly at a lit bulb.
6. Keep flammable materials away from lit bulbs.
7. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Remove mounting plate (A) and wire connection box (C) from fixture base (F) by unscrewing base screws (E) and cap nuts (D).
3. Place mounting plate (A) to ceiling outlet box by aligning the holes and secure with mounting screws (B).
4. Attach the fixture ground wire (green) to the ground wire from the outlet box (usually green or bare wire) with a plastic wire connector and wrap the connection with electrical tape.
5. Connect the neutral wire (white) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
6. Connect the hot wire (black) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape.
7. Attach wire connection box (C) to mounting plate (A), letting the threaded studs on mounting plate (A) pass through the holes on wire connection box (Q). Secure with cap nuts (D).
8. Attach fixture base (F) to mounting plate (A) by aligning the holes. Secure with base screws (E).
9. Insert the recommended bulbs into sockets.
10. Loosen the thumbscrews (H). Carefully insert glass shades (J) into shade holders (G). Secure glass shades to holders by gently tightening the thumbscrews (H). Screw thumbscrews evenly all around glass shade. **DO NOT OVERTIGHTEN SCREWS** or breakage of glass will result.
11. Assembly is complete.

ADJUSTMENT

Angle of cords and shades may be adjusted by carefully sliding ring (L) up or down, depending on visual preference. To do so, hold cords together with one hand while sliding the ring with the other. Note: ring may be lowered to within 12" of the socket assembly. Do not position the ring closer to the socket than the recommended distance as this may put undue pressure on the cord and socket fittings.

CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.


RESTORATION HARDWARE

TEARDROP FILAMENT CHANDELIER 19-CORD

PARTS ENCLOSED

- | | |
|------------------------|-----------------------------|
| (A) Mounting Plate (1) | (K) Light bulb (19) |
| (B) Mounting Screw (2) | (L) T-Wrench (1) |
| (C) Metal cover (1) | (M) Screw (3) |
| (D) Cap nut (2) | (N) Nut (8) |
| (E) Base Screw (3) | (O) Metal tab (4) |
| (F) Fixture Base (1) | (P) Plastic tab (4) |
| (G) Shade holder (19) | (Q) Wire connection box (1) |
| (H) Thumbscrew (57) | (R) Retaining Ring (1) |
| (J) Glass Shade (19) | |

INSTALLATION WITH CORD LENGTH ADJUSTMENT

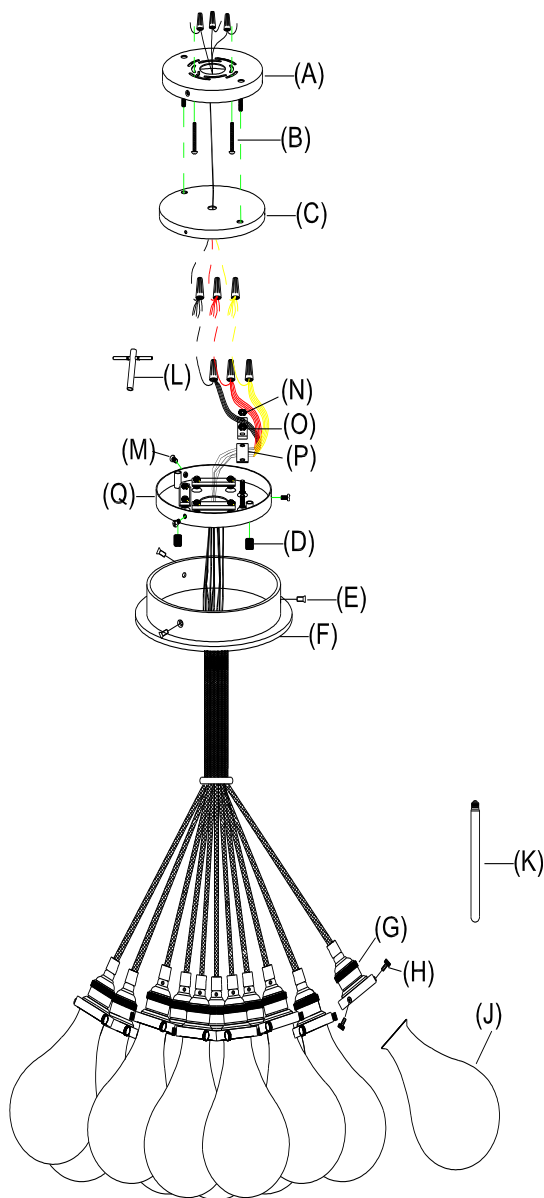

INSTALLATION BY A LICENSED ELECTRICIAN IS REQUIRED.

This fixture has been rated for up to nineteen (19) 40-Watt maximum Type T bulbs (20-Watt Type T9 Bulb included) or 13-Watt compact fluorescent light bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

1. **DISCONNECT ELECTRICITY BEFORE BEGINNING INSTALLATION. DO NOT RECONNECT ELECTRICITY UNTIL YOUR LAMP IS FULLY INSTALLED!**
2. Do not remove the lamp from its packaging by pulling on the power cords, as a bad connection may result.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light bulbs.
3. Do not touch a bulb when the fixture is turned on. Do not look directly at a lit bulb.
4. Keep flammable materials away from lit bulbs.
5. This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Remove mounting plate (A) and wire connection box (Q) from fixture base (F) by unscrewing base screws (E) and cap nuts (D).
3. Remove metal cover (C) from wire connection box (Q) by unscrewing screws (M).
4. Remove nuts (N), metal tabs (O) and plastic tabs (P) by using T-wrench (L).
5. Attach one glass shade (J) to one shade holder (G).
6. Determine the overall fixture hanging height by holding the assembled cord with shade to the ceiling, making sure the glass shade (J) is at the proper height. Add an additional 4" to the end of the cord to allow for wiring, and cut the cord at the marked point.
7. Use the first cord as a guide to cut the remaining cords.
8. Re-crimp the cords and replace the plastic tabs (P), metal tabs (O) and nuts (N). Make sure that the plastic and metal tabs are tightened firmly on the cords, to keep them in place.
9. Place mounting plate (A) to ceiling outlet box by aligning the holes. Secure with mounting screws (B).
10. Attach the fixture ground wire (green) to the ground wire from the outlet box (usually green or bare wire) with a plastic wire connector and wrap the connection with electrical tape.
11. Connect the neutral wire (white) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
12. Connect the hot wire (black) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape.
13. Attach wire connection box (Q) to mounting plate (A), letting the threaded studs on mounting plate (A) pass through the holes on wire connection box (Q). Secure with cap nuts (D).
14. Attach fixture base (F) to mounting plate (A) by aligning the holes and secure with base screws (E).
15. Insert the recommended bulbs into sockets.
16. Loosen the thumbscrews (H). Carefully insert glass shades (J) into shade holders (G). Secure glass shades to holders by gently tightening the thumbscrews (H). Screw thumbscrews evenly all around glass shade. **DO NOT OVERTIGHTEN SCREWS** or breakage of glass will result.
17. Assembly is complete.

ADJUSTMENT

Angle of cords and shades may be adjusted by carefully sliding ring (L) up or down, depending on visual preference. To do so, hold cords together with one hand while sliding the ring with the other. Note: ring may be lowered to within 12" of the socket assembly. Do not position the ring closer to the socket than the recommended distance as this may put undue pressure on the cord and socket fittings.

CARE INSTRUCTIONS:

Wipe all surfaces with a soft dry cloth. Clean glass with a mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.